



SOMANY

Somany Ceramics Limited

Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph.: 0120-4627900

Ahmedabad Office: 601 to 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad-382481; Ph.: 079-27661103 & 04

Registered Office: 2, Red Cross Place, Kolkata-700001; Ph.: 033-22487406/5913

www.somanyceramics.com | e-mail: **customer.care@somanyceramics.com**

Toll Free No. 1800-103-0004 (Timing-10:00 am to 6:30 pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic



Find us at:
www.twitter.com/SomanyCeramic



Find us at:
www.instagram.com/SomanyCeramics



MARVELA / CAT / OCTOBER - 2024

MARVELA
FLORITUFF

SOMANY
TILES | BATHWARE

MARVELA
COLLECTION
600x1200mm



A.P. PLANT | FOR SOUTH

Timeless reflections

Discover the beauty of timeless design with our polished tiles that reflect your style and class.



NATURAL MARVELS FOR A WONDERFUL ABODE

The new range of "Marvela" tiles by Somany is a fusion of elegance & grace. Inspired from Indian, Turkish & Italian marble which offers plethora of designs, that can be marveled into natural masterpieces.

Available in various sizes of 600x1200mm, these are high definition digital polished tiles that provide gleaming mirror like finish. Complimented with designs that caters to both wall & floor, Marvela is also the toughest tile in its category.

With a wide range of textures, finishes, designs & sizes, Marvela is here to add absolute mix of sophistication & opulence lending a sheer bliss to ones's abode.



Size: | Finish:
600x1200mm | Full Polish

ADVANCE TECHNICAL FEATURE

High-strength materials ensure durability and scratch resistance. Precision-engineered for seamless installation and easy maintenance. Eco-friendly, non-slip surface, perfect for both indoor and outdoor use.



PERFECTLY FLAT

EASY TO CLEAN



HYGIENIC

LIGHT WEIGHT EASILY
HANDLED TILES



RESISTANCE TO
CHEMICALS

BENDING STRENGTH



EASY TO INSTALL

SURFACE FOR EVERY AREA



RESIDENCES



MALLS



BATHROOMS



HOTELS



KITCHENS



AIRPORTS



OFFICES



RESTAURANTS



RAILWAY STATIONS



SHOPS





MARVELA
COLLECTION

Full Polish Collection

Elevate your interiors with the luxurious shine and impeccable finish of Marvela's Full Polish Tiles Collection. Designed to exude sophistication, these tiles are crafted with precision to offer unmatched elegance and durability. Whether you're looking to enhance the aesthetics of your home, office, or commercial space, our collection of full polish tiles provides the perfect solution.



WALL TILES



FLOOR TILES



HIGH DEFINITION



INTERIOR



FULL POLISHED



RANDOM PRINT



NANO TECH

Size: **600x1200mm** | Finish: **Full Polish**





MARVELA
COLLECTION

600x1200mm Full Polish




NEW



VIBON ASLAN WENGE FP



360°

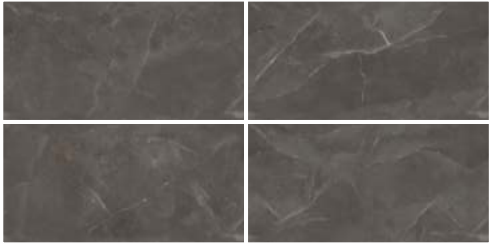

V4

NEW



VIBON ASLAN CREMA FP



360°



V4

NEW



VIBON AFTON IVORY FP



360°



V4



NEW



VIBON TRISTAN ONYX FP



360°



V4




NEW



VIBON ELLERY BROWN FP



360°

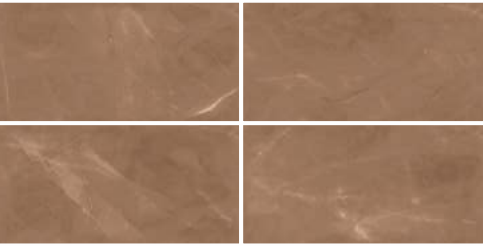

V4



NEW



VIBON ELLERY CREMA FP




360°



V4




NEW

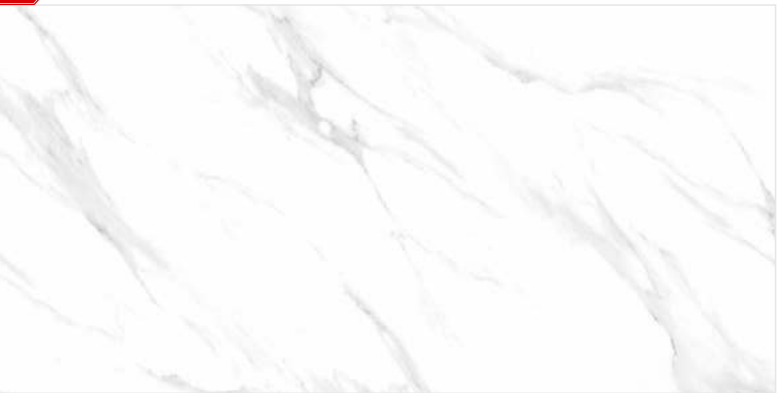

VIBON GLARE STATUARIO FP




360°

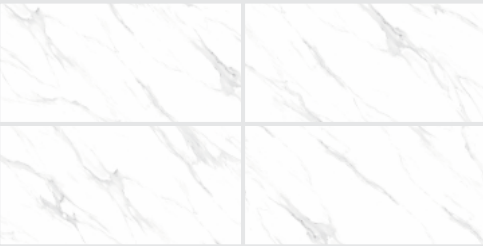

V6




NEW

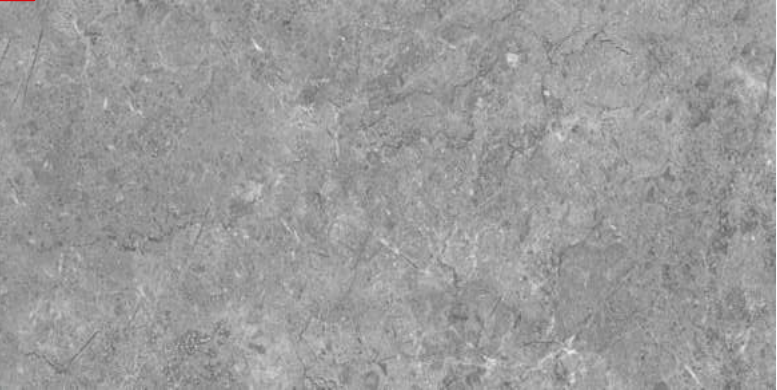

VIBON CANUTUS GREY FP



360°

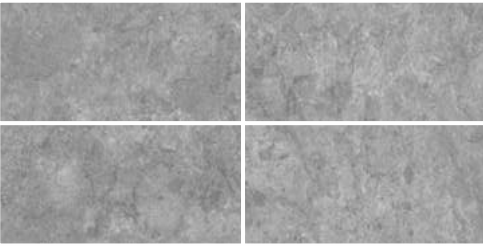

V4



NEW



VIBON CANUTUS SILVER FP



360°



V4



NEW



VIBON CORDELL BEIGE LIGHT FP



360°



V4


NEW



VIBON FOLIA GREY FP



360°

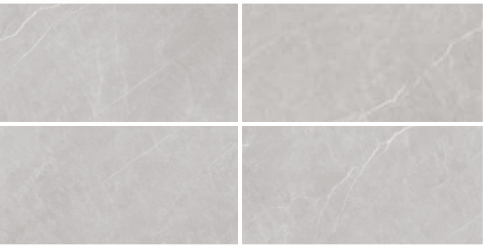

V4


NEW



VIBON CORDELL BEIGE DÉCOR HL 01 FP



360°

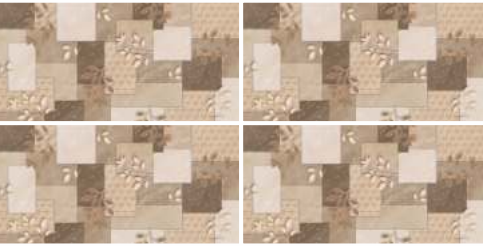

V1

NEW



VIBON FOLIA DÉCOR HL 01 FP



360°



V1

NEW



VIBON CORDELL BEIGE DARK FP




360°



V4


NEW

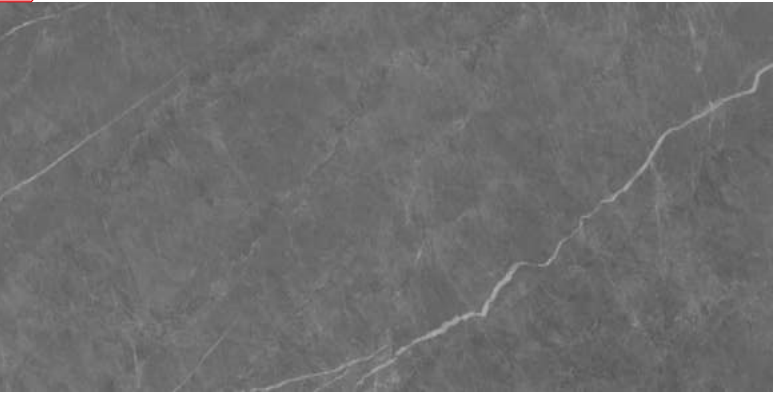

VIBON FOLIA NERO FP



360°

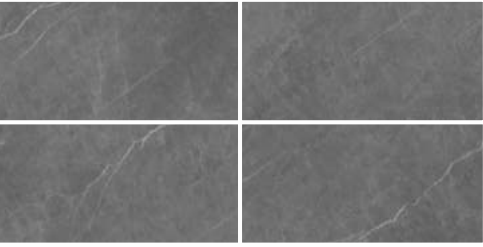

V4



NEW



VIBON CAROLAN NATURAL FP



360°



V4

NEW



VIBON CAROLAN DÉCOR HL 01 FP



360°



V1

NEW



VIBON CAROLAN BEIGE FP



360°



V4

NEW



VIBON PRIMEIRO CREMA FP



360°



V4


NEW



VIBON PRIMEIRO DÉCOR HL 01 FP



360°

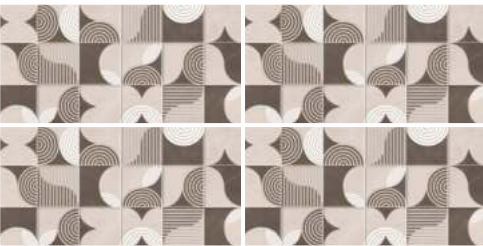

V1


NEW



VIBON PRIMEIRO COFFEE FP



360°

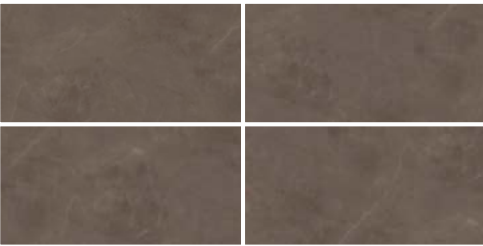

V4


NEW



VIBON SLATER DARK GREY FP



360°

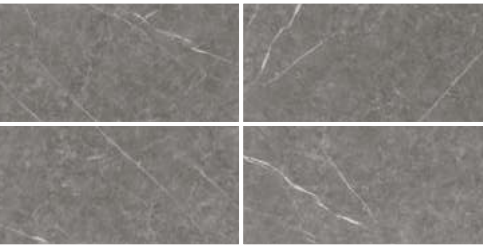

V4



NEW



VIBON SLATER LIGHT GREY FP



360°



V4



NEW



VIBON KULLU MARFIL FP



360°



V3



VIBON ALBION BEIGE FP



360°



V3



VIBON ANZA BEIGE FP



360°



V3



VIBON ANZA BROWN FP



360°



V3








VIBON AMELL COFFEE FP




360°

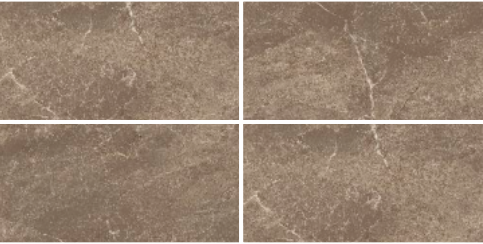

VIBON AMELL NATURAL FP



360°

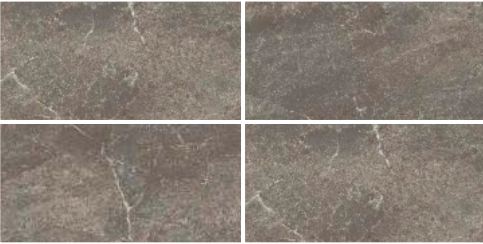

VIBON AMELL CREMA FP




360°



VIBON AMELL GREY DARK FP




360°



VIBON WHITE FP



360°

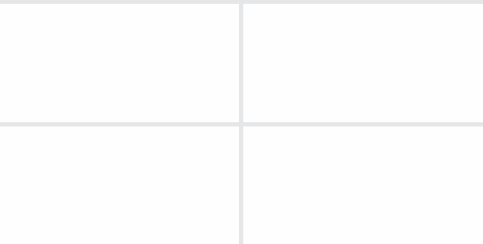

VIBON AMELL GREY LIGHT FP



360°







VIBON AZEIL GREY LIGHT FP



360°

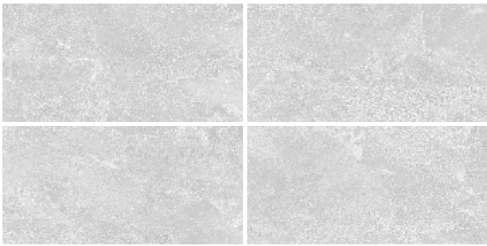


V4

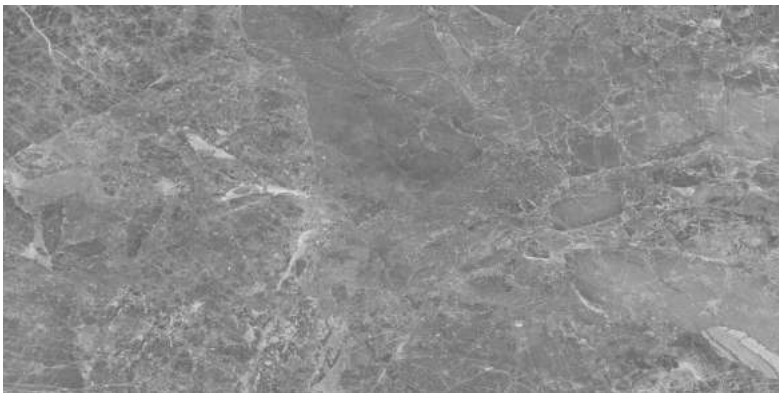

VIBON AZEIL GREY DARK FP



360°

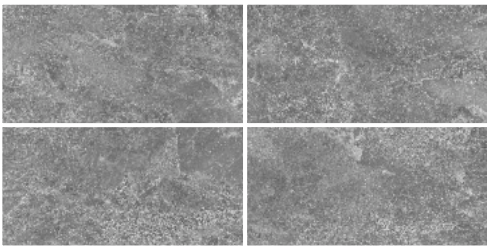


V4



VIBON ATKA BEIGE FP



360°

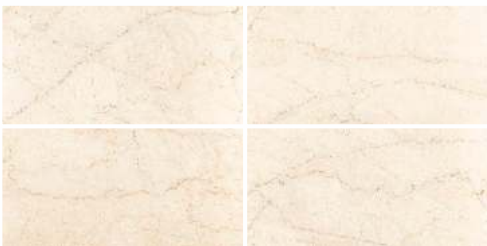


V4



VIBON DEVIX BEIGE FP



360°

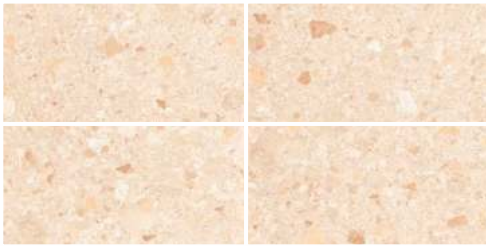


V4



VIBON DEVIX BROWN FP



360°

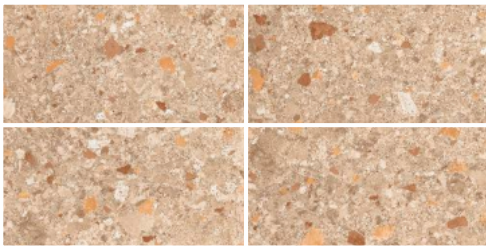

V4



VIBON TORANO WHITE FP



360°



V3





360°



V4

VIBON CELLINI STATURIO FP



360°



V3

VIBON ELIORA CREMA FP



360°




V3

VIBON ELIORA BEIGE FP



360°

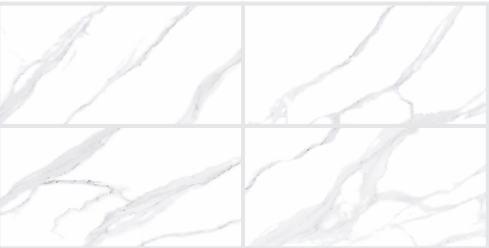

V4

VIBON LENCI STATURIO FP



360°




V4

VIBON HIERRO BROWN FP



360°

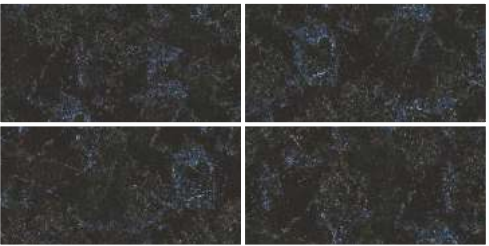

V4

VIBON HIERRO GREY FP



VIBON MANAOS BEIGE FP



360°




V4



VIBON MANAOS BROWN FP



360°

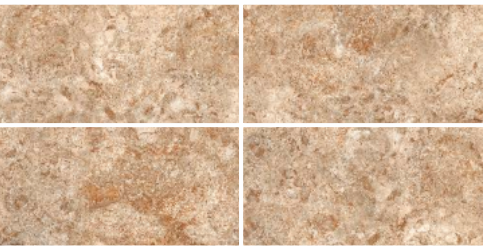


V4



VIBON MANAOS CREMA FP



360°

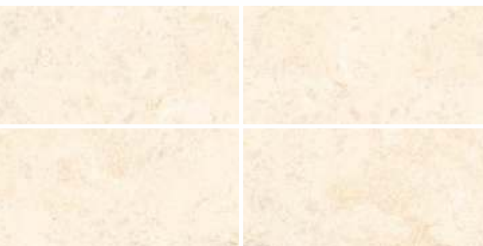

V4



VIBON MANAR GREY DARK FP



360°



V3



VIBON MANAR GREY LIGHT FP



360°



V3



VIBON SERENA ONYX FP



360°



V4







VIBON SAVOIA GREY DARK FP



360°

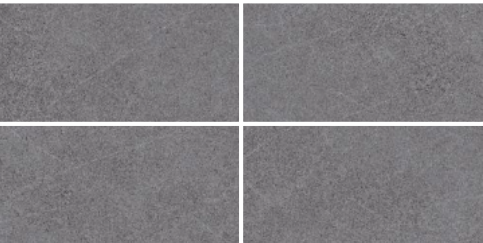

V4

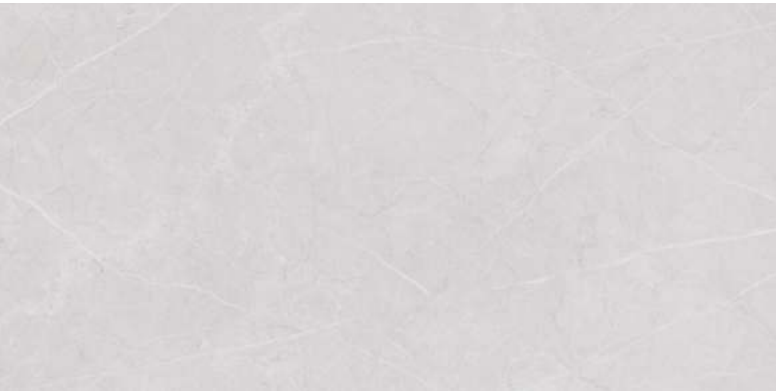

VIBON SAVOIA GREY LIGHT FP



360°



V4



VIBON ZAIN NATURAL FP



360°



V3



VIBON ZAIN GREY FP



360°




V3


DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.


Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.




V1 Uniform Appearance



V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation

The classification is as follow:

V1 Minimal Variation V2 Slight Variation V3 Random Variation V4 Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles.

For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder. And use with spacer to look good

Notes

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. “Technical Specification” for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

PACKING DETAIL FOR 600X1200MM HD DIGITAL TILES

Nominal Size	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton
600 x 1200mm	8.8 mm	28.5	2	1.44sq.mtr./15.50sq.ft.

TECHNICAL SPECIFICATION FOR 600X1200MM HD DIGITAL TILES

Characteristics	Requirement as per IS 15622:2017 0.08 < E ≤ 3.0% Group B Ib	Requirement as per ISO 13006:2018 0.5 < E ≤ 3.0% Group B Ib	Our Values	Test Method
A) Dimension & Surface Quality				
I) Length & Width	± 0.1%	± 0.3%	± 0.1%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	± 0.1%	± 0.3%	± 0.1%	
iv) Rectengularity	± 0.1%	± 0.3%	± 0.1%	
v) Surface Flatness				
a) Center curvature (max.Deviation)	± 0.5%	± 0.4%	± 0.2 %	
b) Edge curvature (max.Deviation)	± 0.5%	± 0.4%	± 0.2 %	
c) Corner warpage (max.Deviation)	± 0.5%	± 0.4%	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Av. 0.08<E ≤ 3 %, Individual 3.3 max	Av. 0.5< E ≤ 3 %, Individual 3.3 max	1.5 to 3.0 %	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Avg. 30, Individual 27 min	Avg. 30, Individual 27 Min	Avg. > 35	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1100	1100	Min, 1300	
iv) Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10
v) Scratch Hardness of surface (Mohs)	Min 5	N/A	Min.5 (for Matt & CR), Min.3 (for FP & HG)	IS 13630 Part 13
vi) Resistance to Abrasion of glazed tiles(Class I to V)	Min II	Abrasion Class & Cycle passed	Class-V (for Matt & CR), Class-III (for FP & HG)	IS 13630 Part 11 /ISO 10545-7
vii) Coefficient of linear thermal expansion from embiant temperature to 100° C	7 X 10 ⁻⁶ K ⁻¹ max	Test Method Available	Max 6 X 10 ⁻⁶ K ⁻¹ max	IS 13630 Part 4/ ISO 10545-8
viii) Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9
ix) Crazing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
x) Impact Resistance as Co-efficient of Restitution (COR)	0.55 min	Test Method Available	Min 0.55	IS 13630 Part 14/ISO 10545-5
xi) Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistance (glazed Tiles)				
I) Stain Resistance	Min Class 1	Min Class 3	Min Class-1 (for Matt & CR), Min Class-2 (for FP & HG)	IS 13630 Part 8 &ISO 10545-14
ii) Resistance to household chemicals	Min Class AA	Min B	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value	Min Class AA	

SOMANY
Bathware

Our PORTFOLIO



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Ezy Fix
TILES ADHESIVES & GROUTS

SOMANY



HIGH STRENGTH POLYMER MODIFIED TILE ADHESIVE



BENEFITS

- » READY AND EASY TO USE
- » EXCELLENT BONDING WITH ALL SURFACES
- » FAST SETTING
- » SELF-CURING

USES

- » FOR FIXING ALL TYPE OF TILES
- » FOR NEW FLOORING AND RENOVATION
- » CAN BE USED FOR TILE ON TILE