















Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph.: 0120-4627900

Ahmedabad Office: 601 to 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover,

S.G. Highway, Ahmedabad-382481; Ph.: 079-27661103 & 04

Registered Office: 2, Red Cross Place, Kolkata-700001; Ph.: 033-22487406/5913

www.somanyceramics.com I e-mail: customer.care@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00 am to 6:30 pm; Mon-Fri)





















The new range of "Marvela" tiles by Somany is a fusion of elegance & grace. Inspired from Indian, Turkish & Italian marble which offers plethora of designs, that can be marveled into natural masterpieces.

Available in various sizes of 800x1600mm, these are high definition digital polished tiles that provide gleaming mirror like finish. Complimented with designs that caters to both wall & floor, Marvela is also the toughest tile in its category.

With a wide range of textures, finishes, designs & sizes, Marvela is here to add absolute mix of sophistication & opulence lending a sheer bliss to ones's abode.



SURFACE FOR EVERY AREA



RESIDENCES



MALLS



BATHROOMS



HOTELS



KITCHENS



AIRPORTS



OFFICES



RESTAURANTS



RAILWAY STATIONS




SHOPS



ELEGANT FINISHES FOR EVERY STYLE

Choose from High Gloss for a sleek shine, Full Polish for a smooth, reflective surface, or Matt Carving for textured elegance. Perfect for modern interiors.

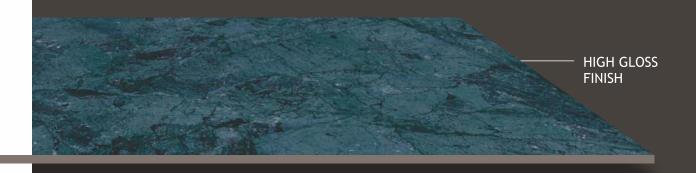





ADVANCE TECHNICAL FEATURE

High-strength materials ensure durability and scratch resistance. Precision-engineered for seamless installation and easy maintenance. Eco-friendly, non-slip surface, perfect for both indoor and outdoor use.











PERFECTLY FLAT



EASY TO CLEAN



HYGIENIC



LIGHT WEIGHT EASILY
HANDLED TILES



RESISTANCE TO CHEMICALS



BENDING STRENGTH



EASY TO INSTALL



CONTENT

HIGH GLOSS FINISH 800x1600mm

FULL POLISH FINISH 800x1600mm

..... 10

MATT CARVING FINISH 800x1600mm

......28



MARVELA COLLECTION

800x1600mm























TIGRAN ETOILE AQUA HG V3 🗳 👣 👣







MARVELA COLLECTION



Tiles are known for their elegance and timeless beauty, offering a luxurious and sophisticated ambiance.





TIGRAN IRIS MINT FP









































TIGRAN INVISIBLE GREY LIGHT FP V2 🕏 🐧 👣










V3 🕴 🐧 👣








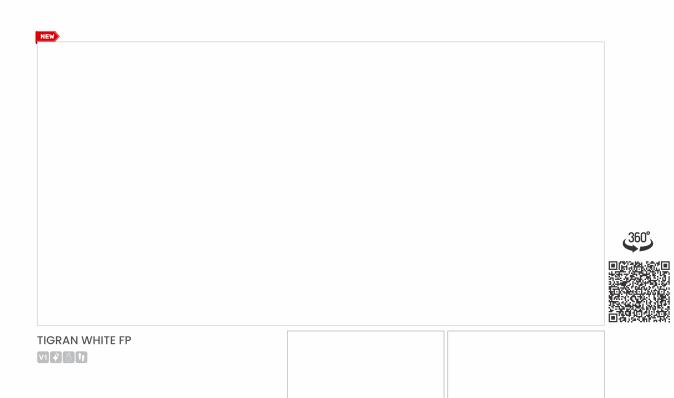



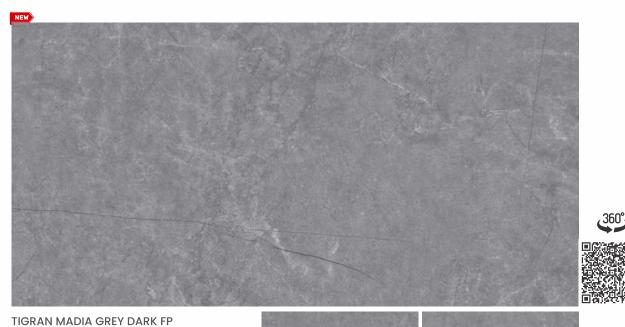





TIGRAN MADIA GREY LIGHT FP V3 🗳 🐧 👣


















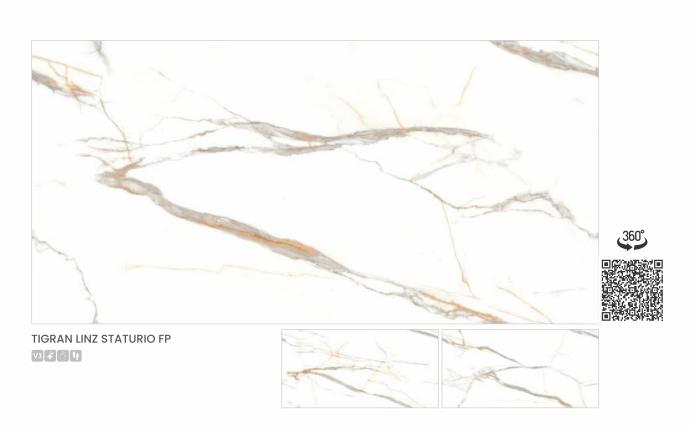




















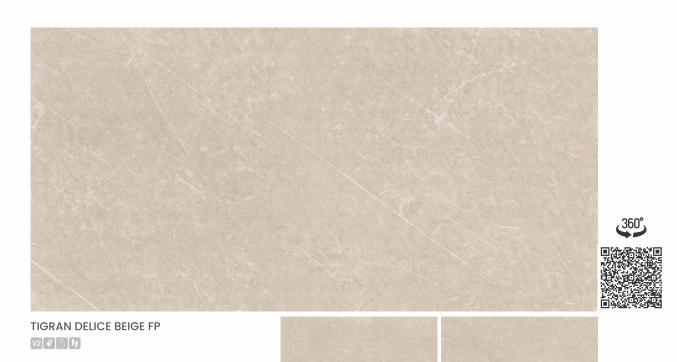



V4 🕏 🐧 👣











360°















TIGRAN ORESTE BEIGE FP V2 🕏 🐧 👣



800x1600mm




























800x1600mm

MATT CARVING FINISH

























TIGRAN NEXO GREY DARK CR V3 🕴 🐧 👣



V2 🕏 🐧 👣

800x1600mm

MATT CARVING FINISH























Immersive and TIMELESS AMBIENCE

Tiles bring a perfect blend of modern elegance and classic design. With their versatile texture and subtle tones, they enhance any space, creating a lasting impression.





TIGRAN ECLECTIC BIANCO CR

V2 🕏 🖞 👣
























DESIGN, PATTERN & SHADE VARIATION GUIDE


Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.









V2 V1 Uniform Appearance Slight Variation

The classification is as follow:

Minimal Variation ✓ Random Variation ✓ Slight Variation ✓ Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles. For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder. And use with spacer to look good

Notes

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. "Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

PACKING DETAIL FOR UNIT-4 MARVELA TILES							
Nominal Size	Thickness (mm)	Av. Wt. per carton (Kg)	No. of Tiles per carton	Coverage area per carton			
800X1600mm (Tigran Series)	9.0mm	51.50 Kgs.	2	2.56sq.mtr./27.55sq.ft.			

	TE	CHNICAL SPECIFICA	ATION FOR UNIT-4	I MARVELA TILES	S	
	Characteristics	Requirement as per IS 15622:2017 0.08 < E ≤ 3% Group B I b	Requirement as per ISO 13006:2018 0.5 ≤ E≤ 3% Group B I b	Our Value	Test Method	
А	Dimension & Surface Quality					
1	Length & Width	±0.10%	±0.3%	± 0.10%		
ii	Thickness	± 5.0 %	± 5.0%	± 4.0%		
iii	Straightness of Side	± 0.10%	±0.3%	± 0.10%		
iv	Rectengularity	± 0.10%	±0.3%	± 0.10%		
V	Surface Flatness	Surface Flatness				
а	Center curvature (%) (max.Deviation)	± 0.5 %	±0.4%	± 0.20%	IS 13630 Part 1/ISO 10545-2	
b	Edge curvature (%) (max.Deviation)	± 0.5 %	±0.4%	± 0.20%		
С	Corner warpage (%)(max.Deviation)	± 0.5 %	±0.4%	± 0.2%		
vi	Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects		
В	Physical Properties					
1	Water Absorption (%)	Av. $0.08 < E \le 3 \%$, Individual 3.3 max	Av. 0.5 < E ≤ 3 %, Individual 3.3 max	Avg. E≤ 3.0 %	IS 13630 Part 2/ISO 10545-3	
ii	Modulus of Rupture [N/mm2]	Avg. 30, Individual 27 Min	Avg. 30, Individual 27 Min	Avg. > 30	IS 13630 Part 6/ISO 10545-4	
iii	Breaking Strength in N	Min. 1100	Min. 1100	Min. 1100		
iv	Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10	
V	Scratch Hardness of surface (Mohs)	Min 5	N.A	Min.5 (for Matt), Min.3 (for Polished)	IS 13630 Part 13	
vi	Resistance to Abrasion of glazed tiles(Class I to V)	Min II	Abrasion Class & Cycle passed	Class-V(for Matt), Class-III(for Polished)	IS 13630 Part 11/ISO 10545-7	
vii	Coefficient of linear thermal expansion from embiant temperature to 100 0 C	7 X 10 ⁻⁶ K ⁻¹ max	Test Method Available	Max 6 X 10 ⁻⁶ K ⁻¹ Max	IS 13630 Part 4/ISO 10545-8	
viii	Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9	
ix	Crazing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11	
х	Impact Resistance as Co-efficient of Restitution (COR)	0.55 Min	Test Method Available	Min 0.55	IS 13630 Part-14/ISO 10545-5	
xi	Forst resistance	Required	Required	100 cycle passed	IS 13630 Part 10/ISO 10545-12	
С	Chemical Resistance (glazed Tiles)					
1	Stain Resistance	Min Class 1	Min Class 3	Min Class-1(For Matt), Min Class-2(for Polished)	IS 13630 Part 8 & ISO 10545-14	
ii	Resistance to household chemicals	Min Class AA	Min B	Min Class AA	IS 13630 Part 8/ISO 10545-13	
iii	Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value ^f	Min Class AA		

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see physical sample before placing the order. Technical Specifications for Somany Wall & Floor Tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation, company will not entertain complaints, once the tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

37



Gur_ PORTFOLIO



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories







HIGH STRENGTH POLYMER MODIFIED

TILE ADHESIVE



BENEFITS <

- » READY AND EASY TO USE
- » EXCELLENT BONDING WITH ALL SURFACES
- » FAST SETTING
- SELF-CURING

<u>USES</u>

- FOR FIXING ALL TYPE OF TILES
- FOR NEW FLOORING AND RENOVATION
- > CAN BE USED FOR TILE ON TILE