SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)



UNIT 02 RANGE VOL 1 | JULY 2026

CERAMICA

WALL TILES COLLECTION

300 x 450mm
300 x 300mm

SOMANY

Step into the Future of **Wall Surfaces**

Where walls become storytellers, surfaces transcend function, introducing the Wall Tiles collection. From intricate geometric compositions to nature-inspired motifs and chromatic harmonies, each design captures the essence of contemporary artistry with remarkable clarity and depth. Available in 300x450mm and 300x300mm, it offers infinite creative freedom through two distinctive finishes: Glossy enhances vibrancy with reflective brilliance, while Matt whispers sophistication through subtle, low-sheen surfaces. Engineered for enduring elegance across residential and commercial applications, from kitchens and bathrooms to living spaces, hospitality interiors, and retail environments. Exceptional resistance to stains and dirt ensures surfaces remain immaculate, while the versatile design language adapts to any aesthetic vision. Where walls deserve more, and creativity knows no bounds.



Application Areas

- Residential Areas
- Commercial Areas
- Hospitals
- Shops And Malls
- Hotels And Restaurants
- Schools And Colleges
- Outdoor Furniture
- Public Places

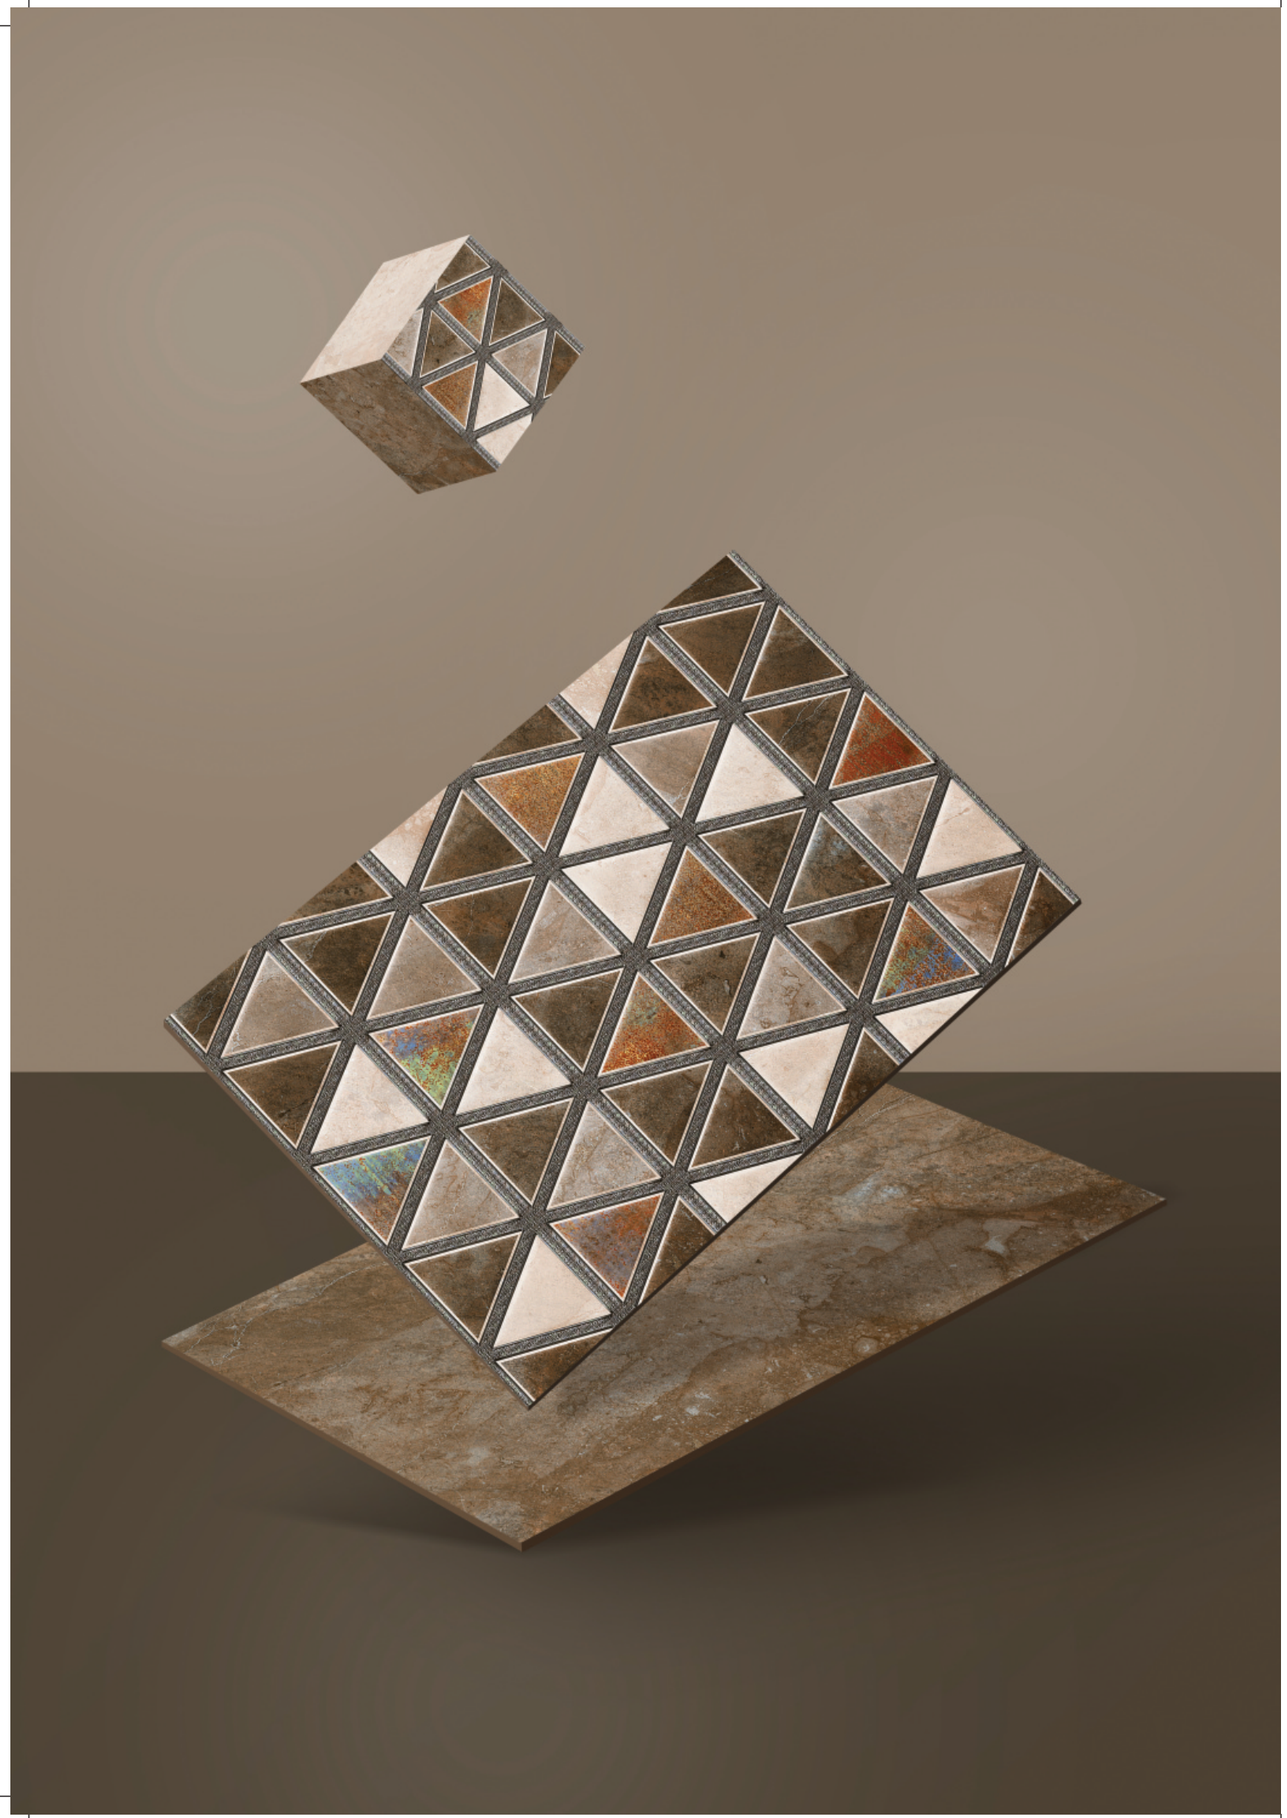

GLOSSTRA

WALL TILES - **300**x**450** mm

GLOSSY COLLECTION

Our Glossy finishes celebrate brilliance, reflecting light to amplify space and elevate mood. The smooth, polished surface delivers luminous luxury with striking visual impact, perfect for kitchens, bathrooms, and feature walls that demand contemporary drama.

WALL TILES | HIGH DEFINITION | RANDOM





WALL:
ARRIGO CREMA
ARRIGO BROWN HL 01
ARRIGO BROWN

FLOOR:
F-ARRIGO BROWN, MATT
300x300mm

WALL TILES

AHREN

V4 **AHREN LIGHT,** GLOSSY
300x450mm



V4 **AHREN DARK,** GLOSSY
300x450mm



F-ARRIGO GREY DARK, MATT
300x300mm

AIMEE

V4 **AIMEE LIGHT,** GLOSSY
300x450mm



V1 **AIMEE HL 01,** GLOSSY
300x450mm



V4 **AIMEE DARK,** GLOSSY
300x450mm



F-ARRIGO BROWN, MATT
300x300mm

ALISA GREY

V1 **ALISA GREY LIGHT,** GLOSSY
300x450mm



V1 **ALISA GREY DARK,** GLOSSY
300x450mm



F-MARCIA SLATE, MATT
300x300mm

ARRIGO

V4 **ARRIGO CREMA,** GLOSSY
300x450mm



V4 **ARRIGO BROWN HL 01,** GLOSSY
300x450mm



V4 **ARRIGO BROWN,** GLOSSY
300x450mm



F-ARRIGO BROWN, MATT
300x300mm

ARRIGO

V4 **ARRIGO GREY LIGHT,** GLOSSY
300x450mm



V4 **ARRIGO GREY HL 01,** GLOSSY
300x450mm



V4 **ARRIGO GREY DARK,** GLOSSY
300x450mm



F-ARRIGO GREY DARK, MATT
300x300mm

ASTORIO

V1 **ASTORIO LIGHT,** GLOSSY
300x450mm



V1 **ASTORIO HL 01,** GLOSSY
300x450mm



V1 **ASTORIO DARK,** GLOSSY
300x450mm



F-OSANE BLUE DARK, MATT
300x300mm

WALL TILES

BERTA

V1 **BERTA LIGHT,** GLOSSY
300x450mm



V1 **BERTA DARK,** GLOSSY
300x450mm



F-ARRIGO BROWN, MATT
300x300mm

BIANCHI



V1 **BIANCHI,** GLOSSY
300x450mm



V2 **BIANCHI HL 01 A,** GLOSSY
300x450mm



V2 **BIANCHI HL 01 B,** GLOSSY
300x450mm

CASA

V4 **CASA DAINO LIGHT,** GLOSSY
300x450mm



V4 **CASA DAINO DARK,** GLOSSY
300x450mm



F-CASA DAINO DARK, MATT
300x300mm

CLAUDE

V1 **CLAUDE BIANCO,** GLOSSY
300x450mm



V1 **CLAUDE GREY,** GLOSSY
300x450mm



F-MATTERO GREY, MATT
300x300mm

CORSA

V1 **CORSA CREMA,** GLOSSY
300x450mm



V1 **CORSA BROWN,** GLOSSY
300x450mm



F-CORSA BROWN, MATT
300x300mm

CORTE

V1 **CORTE LIGHT,** GLOSSY
300x450mm



V1 **CORTE HL 01,** GLOSSY
300x450mm



V1 **CORTE DARK,** GLOSSY
300x450mm



F-MATTERO GREY, MATT
300X300MM

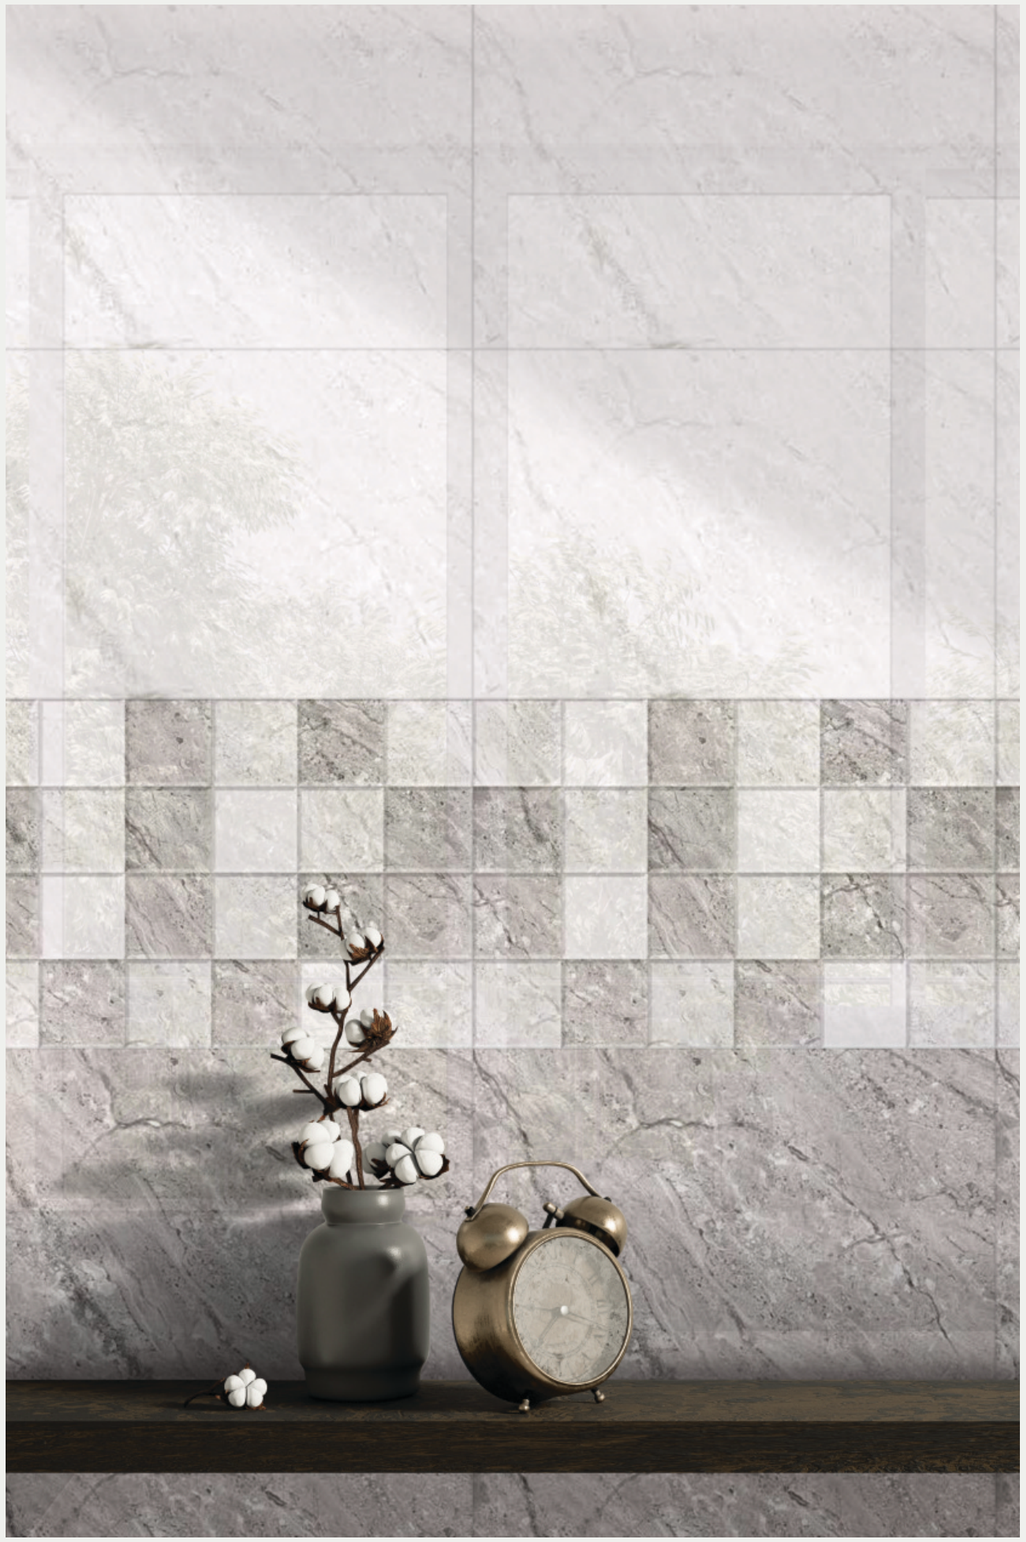



WALL:
GRANITO LIGHT
GRANITO LIGHT HL 01
GRANITO DARK

FLOOR:
F-GRANITO DARK, MATT
300x300mm

WALL TILES

ELVES

V1 **ELVES LIGHT,** GLOSSY
300x450mm



V1 **ELVES HL 01,** GLOSSY
300x450mm



V1 **ELVES DARK,** GLOSSY
300x450mm



F-CORSA BROWN, MATT
300x300mm

FLAIR

V1 **FLAIR LIGHT,** GLOSSY
300x450mm



V2 **FLAIR HL- 01 A,** GLOSSY
300x450mm



V2 **FLAIR HL- 01 B,** GLOSSY
300x450mm



V1 **FLAIR PINK,** GLOSSY
300x450mm

F-FLORIO DARK, MATT
300x300mm

GABRIELLE

V4 **GABRIELLE LIGHT,** GLOSSY
300x450mm



V1 **GABRIELLE HL 01,** GLOSSY
300x450mm



V4 **GABRIELLE DARK,** GLOSSY
300x450mm



F-GABRIELLE DARK, MATT
300x300mm

GRANITO

V1 **GRANITO LIGHT,** GLOSSY
300x450mm



V1 **GRANITO HL 01,** GLOSSY
300x450mm



V1 **GRANITO DARK,** GLOSSY
300x450mm



F-GRANITO DARK, MATT
300x300mm

GRANITE BEIGE

V1 **GRANITE BEIGE LIGHT,** GLOSSY
300x450mm



V1 **GRANITE BEIGE DARK,** GLOSSY
300x450mm



F-GRANITE BEIGE DARK, MATT
300x300mm

GRIFFIN



V1 **GRIFFIN LIGHT,** GLOSSY
300x450mm



V1 **GRIFFIN DARK,** GLOSSY
300x450mm



F-GRIFFIN DARK, MATT
300x300mm

WALL TILES

HANK

V1 **HANK BIANCO,** GLOSSY
300x450mm



V2 **HANK HL 01 A,** GLOSSY
300x450mm



V2 **HANK HL 01 B,** GLOSSY
300x450mm



V1 **HANK GRIS,** GLOSSY
300x450mm



F-ALACIA BLACK, MATT
300x300mm

IRMA

V1 **IRMA LIGHT,** GLOSSY
300x450mm



V1 **IRMA HL 01,** GLOSSY
300x450mm



V1 **IRMA DARK,** GLOSSY
300x450mm



F-IRMA DARK, MATT
300x300mm

LAVICA



V1 **LAVICA LIGHT,** GLOSSY
300x450mm



V1 **LAVICA HL-01,** GLOSSY
300x450mm



V1 **LAVICA DARK,** GLOSSY
300x450mm



F-MARCIA SLATE, MATT
300x300mm

MACAN



V4 **MACAN STATUARIO V4,** GLOSSY
300x450mm



F-LURENT DARK, MATT
300x300mm

RICCO MINT

V1 **RICCO MINT,** GLOSSY
300x450mm



V2 **RICCO MINT HL-01 A,** GLOSSY
300x450mm



V2 **RICCO MINT HL-01 B,** GLOSSY
300x450mm

MARBIDO

V1 **MARBIDO LIGHT,** GLOSSY
300x450mm



V1 **MARBIDO DARK,** GLOSSY
300x450mm

SARA

V1 **SARA LIGHT,** GLOSSY
300x450mm



V1 **SARA DARK,** GLOSSY
300x450mm



F-SARA DARK, MATT
300x300mm

NEO STATUARIO



V2 **NEO STATUARIO,** GLOSSY
300x450mm



V2 **NEO STATUARIO HL 01,** GLOSSY
300x450mm



F-LURENT DARK, MATT
300x300mm





WALL:
IRMA LIGHT
IRMA HL 01
IRMA DARK

FLOOR:
F-IRMA DARK, MATT
300x300mm

300x450 mm
GLOSSY COLLECTION

WALL TILES

300x300 mm
MATT COLLECTION

FLOOR TILES

ACERO

V1 **ACERO SNOW WHITE,** GLOSSY
300x450mm

CENIA

V1 **CENIA LIGHT,** GLOSSY
300x450mm

COLIN

V1 **COLIN CREMA,** GLOSSY
300x450mm

IVORY

V1 **IVORY,** GLOSSY
300x450mm

WHITE

V1 **WHITE,** GLOSSY
300x450mm

DEREK



V1 **DEREK DENIM,** GLOSSY
300x450mm

WILMA



V1 **WILMA BROWN,** Glossy
300x450mm



F-ALACIA BLACK, MATT
300x300mm



F-AQUA MARINA DARK, MATT
300x300mm



F-AQUATIC DARK, MATT
300x300mm



F-ARIAN GRIS DARK, MATT
300x300mm



F-ARRIGO BROWN, MATT
300x300mm



F-ARRIGO GREY DARK, MATT
300x300mm



F-AZZARO BEIGE, MATT
300x300mm



F-BASSANO WOOD ROBBALE,
MATT
300x300mm



F-BELLO MINT DARK, MATT
300x300mm



F-BRUSHY DARK, MATT
300x300mm



F-CALDAS DARK, MATT
300x300mm



F-CAMIA DARK, MATT
300x300mm



F-CANMORE CHOCO, MATT
300x300mm



F-CASA DAINO DARK, MATT
300x300mm



F-CLASSICO BEIGE, MATT
300x300mm



F-COOL WHITE, MATT
300x300mm



F-CORSA BROWN, MATT
300x300mm



F-CRETEIL NATURAL, MATT
300x300mm



F-CRUZ DARK, MATT
300x300mm



F-CUADRO DARK, MATT
300x300mm



F-DIANO DARK, MATT
300x300mm



F-EC MARBIDO DARK, MATT
300x300mm



F-ESTIMAR BLACK, MATT
300x300mm



F-FABRO BROWN DARK, MATT
300x300mm

F-FLORIO DARK, MATT
300x300mm



F-FLORIRE DARK, MATT
300x300mm



F-FREMO DARK, MATT
300x300mm



F-GABRIELLE DARK, MATT
300x300mm



F-GARDEN DARK, MATT
300x300mm



F-GRANITE BEIGE DARK, MATT
300x300mm



F-GRANITO DARK, MATT
300x300mm



F-GRIFFIN DARK, MATT
300x300mm



F-IRMA DARK, MATT
300x300mm



F-JUVENT DARK, MATT
300x300mm



F-LURENT DARK, MATT
300x300mm



F-MALDON DARK, MATT
300x300mm



F-MARCIA SLATE, MATT
300x300mm



F-MARIE GREY LIGHT, MATT
300x300mm



F-MATTERO GREY, MATT
300x300mm



F-NAOS GREY DARK, MATT
300x300mm



F-OKANA DARK, MATT
300x300mm



F-ORLEN BROWN, MATT
300x300mm



F-OSANE BLUE DARK, MATT
300x300mm



F-PARAMO BEIGE DARK, MATT
300x300mm



F-PERLINO DARK, MATT
300x300mm



F-PLUTO DARK, MATT
300x300mm



F-PORTICO DARK, MATT
300x300mm



F-REBEL DARK, MATT
300x300mm



F-SABIA PEACH DARK, MATT
300x300mm



F-SARA DARK, MATT
300x300mm



F-STATUARIO, MATT
300x300mm



F-STRIX GREY DARK, MATT
300x300mm



F-TESLIN OCAR, MATT
300x300mm



F-TRAIL DARK, MATT
300x300mm



F-TRAVERTINO BEIGE DARK,
MATT
300x300mm



F-USTER, MATT
300x300mm



F-VASA DARK, MATT
300x300mm



F-VIBY DARK, MATT
300x300mm



F-VINSTRA BEIGE, MATT
300x300mm



F-VIVO MUSHROOM, MATT
300x300mm

- Reduces surface temperature by 200C & indoor temperature by 3-50C.
- Ideal for sun-facing sides and rooftops.
- Saves on energy bills.
- Fights against the UHIE “Urban Heat Island Effect” due to its high reflectance of sunlight and heat.
- Protects your building from damage caused by high heat conduction.
- Meets guidelines set by IS standards / IGBC & CPWD for energy-efficient roofs.

COOL WHITE

Surface: MATT
Size: 300x300mm

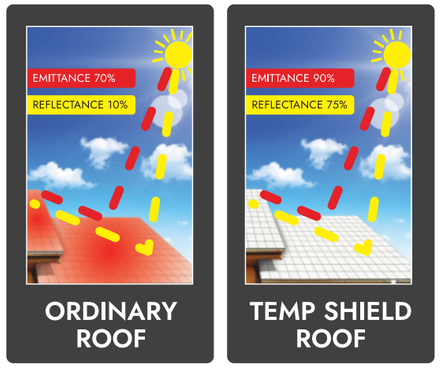

TEST REPORT FOR SOLAR REFLECTANCE INDEX (SRI)

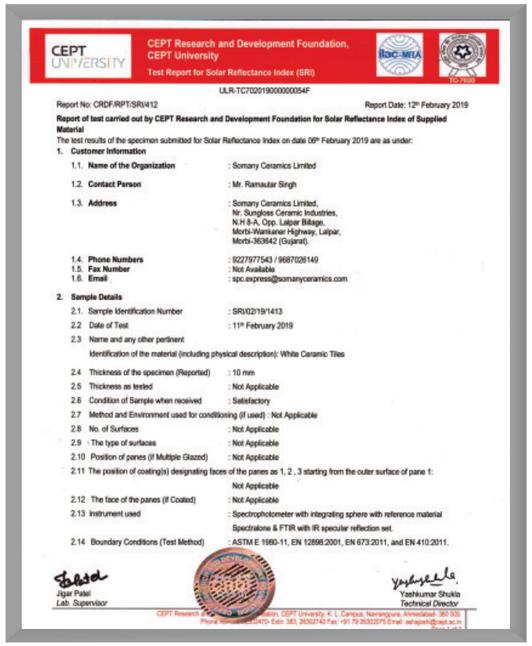

CEPT UNIVERSITY — CEPT Research and Development Foundation, CEPT University
Test Report for Solar Reflectance Index (SRI)

ULR-TC702019000000054F

Report No: CRDF/RPT/SRI/412 — Report Date: 12th February 2019

Report of test carried out by CEPT Research and Development Foundation for Solar Reflectance Index of Supplied Material

The test results of the specimen submitted for Solar Reflectance Index on date 08th February 2019 are as under:

1. **Customer Information**
   - 1.1. Name of the Organization : Somany Ceramics Limited
   - 1.2. Contact Person : Mr. Ramautar Singh
   - 1.3. Address : Somany Ceramics Limited, Nr. Sunglass Ceramic Industries, N.H 8-A, Opp. Lalpar Billage, Morbi-Wankaner Highway, Lalpar, Morbi-363642 (Gujarat).
   - 1.4. Phone Numbers : 9227977543 / 9687026149
   - 1.5. Fax Number : Not Available
   - 1.6. Email : spc.express@somanyceramics.com
2. **Sample Details**
   - 2.1. Sample Identification Number : SRI/02/19/1413
   - 2.2 Date of Test : 11th February 2019
   - 2.3 Name and any other pertinent Identification of the material (including physical description): White Ceramic Tiles
   - 2.4 Thickness of the specimen (Reported) : 10 mm
   - 2.5 Thickness as tested : Not Applicable
   - 2.6 Condition of Sample when received : Satisfactory
   - 2.7 Method and Environment used for conditioning (if used) : Not Applicable
   - 2.8 No. of Surfaces : Not Applicable
   - 2.9 The type of surfaces : Not Applicable
   - 2.10 Position of panes (if Multiple Glazed) : Not Applicable
   - 2.11 The position of coating(s) designating faces of the panes as 1, 2 , 3 starting from the outer surface of pane 1: Not Applicable
   - 2.12 The face of the panes (if Coated) : Not Applicable
   - 2.13 Instrument used : Spectrophotometer with integrating sphere with reference material Spectralone & FTIR with IR specular reflection set.
   - 2.14 Boundary Conditions (Test Method) : ASTM E 1980-11, EN 12898:2001, EN 673:2011, and EN 410:2011.

Jigar Patel, Lab. Supervisor — Yashkumar Shukla, Technical Director

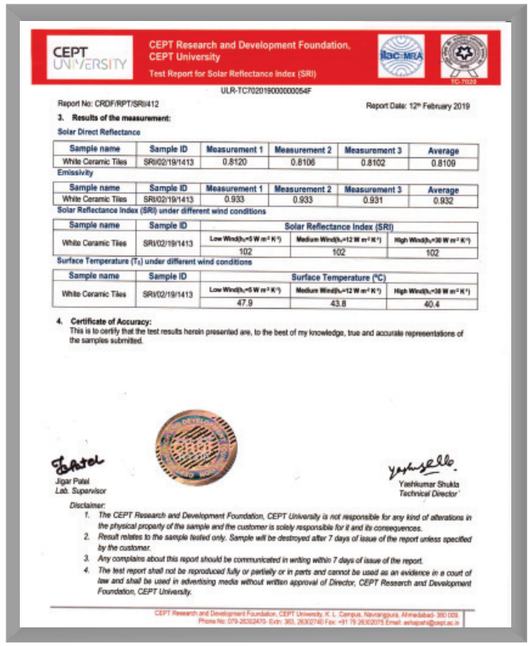

CEPT UNIVERSITY — CEPT Research and Development Foundation, CEPT University
Test Report for Solar Reflectance Index (SRI)

ULR-TC702019000000054F

Report No: CRDF/RPT/SRI/412 — Report Date: 12th February 2019

3. **Results of the measurement:**

Solar Direct Reflectance

Sample name	Sample ID	Measurement 1	Measurement 2	Measurement 3	Average
White Ceramic Tiles	SRI/02/19/1413	0.8120	0.8106	0.8102	0.8109

Emissivity

Sample name	Sample ID	Measurement 1	Measurement 2	Measurement 3	Average
White Ceramic Tiles	SRI/02/19/1413	0.933	0.933	0.931	0.932

Solar Reflectance Index (SRI) under different wind conditions

Sample name	Sample ID	Solar Reflectance Index (SRI)		
		Low Wind (h_c=5 W m^{-2} K^{-1})	Medium Wind (h_c=12 W m^{-2} K^{-1})	High Wind (h_c=30 W m^{-2} K^{-1})
White Ceramic Tiles	SRI/02/19/1413	102	102	102

Surface Temperature (T_s) under different wind conditions

Sample name	Sample ID	Surface Temperature (°C)		
		Low Wind (h_c=5 W m^{-2} K^{-1})	Medium Wind (h_c=12 W m^{-2} K^{-1})	High Wind (h_c=30 W m^{-2} K^{-1})
White Ceramic Tiles	SRI/02/19/1413	47.9	43.8	40.4

4. **Certificate of Accuracy:**
This is to certify that the test results herein presented are, to the best of my knowledge, true and accurate representations of the samples submitted.

Jigar Patel, Lab. Supervisor — Yashkumar Shukla, Technical Director

Disclaimer:
1. *The CEPT Research and Development Foundation, CEPT University is not responsible for any kind of alterations in the physical property of the sample and the customer is solely responsible for it and its consequences.*
2. *Result relates to the sample tested only. Sample will be destroyed after 7 days of issue of the report unless specified by the customer.*
3. *Any complains about this report should be communicated in writing within 7 days of issue of the report.*
4. *The test report shall not be reproduced fully or partially or in parts and cannot be used as an evidence in a court of law and shall be used in advertising media without written approval of Director, CEPT Research and Development Foundation, CEPT University.*



COOL WHITE 300x300mm | Matt

SIZE:
300x450mm | 300x300mm

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR WALL TILES COLLECTION				
Nominal Sizes (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kgs.)	No. of Tiles Per Carton	Coverage Area Per Carton
300x450mm	7.50mm	11.20	6	0.810 sq.mtr. / 8.72 sq.ft.
300x300mm	8.50mm	13.60	10	0.900 sq.mtr. / 9.69 sq.ft.

TECHNICAL SPECIFICATION FOR WALL TILE COLLECTION				
Characteristics	**Requirements as per IS 15622 :2017 Table-5, E >10 %,Group BIII**	**Requirement as per ISO 13006, Annex-L, E >10 %,Group BIII**	**Our Value**	**Test Method**
(A) Dimension & Surface Quality				
I) Length & Width	± 0.20%	± 0.30%	± 0.2%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.00%	± 10.00%	± 4.0%	
iii) Straightness of Side	± 0.15%	± 0.30%	± 0.15%	
iv) Rectangularity	± 0.20%	± 0.30%	± 0.15%	
v) Surface Flatness				
a) Center Curvature (%) (Max. Deviation)	± 0.30%	± 0.40%	± 0.22 %	
b) Edge Curvature (%) (Max. Deviation)	± 0.30%	± 0.40%	± 0.22 %	
c) Corner Warpage (%) (Max. Deviation)	± 0.30%	± 0.40%	± 0.22 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
I) Water Absorption	E≥10% (When the Value Exceeds 20%, This Shall be Indicated by the Manufacturer) Individual Min Value 9%	E≥10% when the Avg. Exceeds 20%, This Shall be Indicated Individual Min Value 9%	Avg. 10-20%	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Min 12	Avg. Min 12	Avg. > 15	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	Min 600	Not Less Than 600	Min 600	
iv) Moisture Expansion in mm/m	Max.0.04	Test Method Available	Max.0.02	IS 13630 part 3 / ISO 10545-10
v) Scratch Hardness of Surface (Mohs)	Min 3	-	Min 3	IS 13630 Part 13
vi) Coefficient of Linear Thermal Expansion from Ambient Temperature to 100C	9 X 10^{-6} K^{-1} Max	Test Method Available	8 X 10^{-6} K^{-1} Max	IS 13630 Part 4/ ISO 10545-8
vii) Thermal Resistant	10 Cycle Min	Test Method Available	10 Cycle Passed	IS 13630 Part 5/ISO-10545-9
viii) Crazing Resistant	4 Cycle @ 7.5bar Min	Required	4 Cycle @ 7.5bar Min	IS 13630 Part 9/ISO 10545-11
C) Stain & Chemical Resistant (Glazed Tiles)				
I) Stain Resistant	Min Class 1	Min Class 3	Class 1	IS 13630 Part 8/ISO 10545-14
ii) Resistant to Household Chemicals	Min Class AA	Min Class B	Min Class AA	IS 13630 Part 8/ISO 10545-13
iii) Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if Agreed	Test Method Available	Min Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

SIZE:
300x300mm

CERAMICA

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR COOL TILE COLLECTION				
Nominal Sizes (mm)	**Thickness(mm)**	**Average Weight Per Carton (Kgs.)**	**No. of Tiles Per Carton**	**Coverage Area Per Carton**
300x300mm	9.00 mm	11.80 Kgs. / Box (Appx)	8 Pcs.	0.72 Sq. Mtr / 7.75 Sq. Ft.

TECHNICAL SPECIFICATION FOR COOL TILE COLLECTION				
Characteristics	**Requirements as per IS 15622 :2017 Table-5, E >10 %,Group BIII**	**Requirement as per ISO 13006, Annex-L, E >10 %,Group BIII**	**Our Value**	**Test Method**
(A) Dimension & Surface Quality				
I) Length & Width	± 0.20%	± 0.30%	± 0.2%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.00%	± 10.00%	± 4.0%	
iii) Straightness of Side	± 0.15%	± 0.30%	± 0.15%	
iv) Rectangularity	± 0.20%	± 0.30%	± 0.15%	
v) Surface Flatness				
a) Center Curvature (%) (Max. Deviation)	± 0.30%	± 0.40%	± 0.22 %	
b) Edge Curvature (%) (Max. Deviation)	± 0.30%	± 0.40%	± 0.22 %	
c) Corner Warpage (%) (Max. Deviation)	± 0.30%	± 0.40%	± 0.22 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
I) Water Absorption	E≥10% (When the Value Exceeds 20%, This Shall be Indicated by the Manufacturer) Individual Min Value 9%	E≥10% when the Avg. Exceeds 20%, This Shall be Indicated Individual Min Value 9%	Avg. 10-20%	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Min 12	Avg. Min 12	Avg. > 15	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	Min 600	Not Less Than 600	Min 600	
iv) Moisture Expansion in mm/m	Max.0.04	Test Method Available	Max.0.02	IS 13630 part 3 / ISO 10545-10
v) Scratch Hardness of Surface (Mohs)	Min 3	-	Min 3	IS 13630 Part 13
vi) Coefficient of Linear Thermal Expansion from Ambient Temperature to 100C	9 X 10^{-6} K^{-1} Max	Test Method Available	8 X 10^{-6} K^{-1} Max	IS 13630 Part 4/ ISO 10545-8
vii) Thermal Resistant	10 Cycle Min	Test Method Available	10 Cycle Passed	IS 13630 Part 5/ISO-10545-9
viii) Crazing Resistant	4 Cycle @ 7.5bar Min	Required	4 Cycle @ 7.5bar Min	IS 13630 Part 9/ISO 10545-11
C) Stain & Chemical Resistant (Glazed Tiles)				
I) Stain Resistant	Min Class 1	Min Class 3	Class 1	IS 13630 Part 8/ISO 10545-14
ii) Resistant to Household Chemicals	Min Class AA	Min Class B	Min Class AA	IS 13630 Part 8/ISO 10545-13
iii) Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if Agreed	Test Method Available	Min Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE

TILE VISUALISER

SOMANY



Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at **www.somanyceramics.com** or call on **Toll Free: 1800 103 0004**

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome

Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com