




Power of Desire



NEOLLA

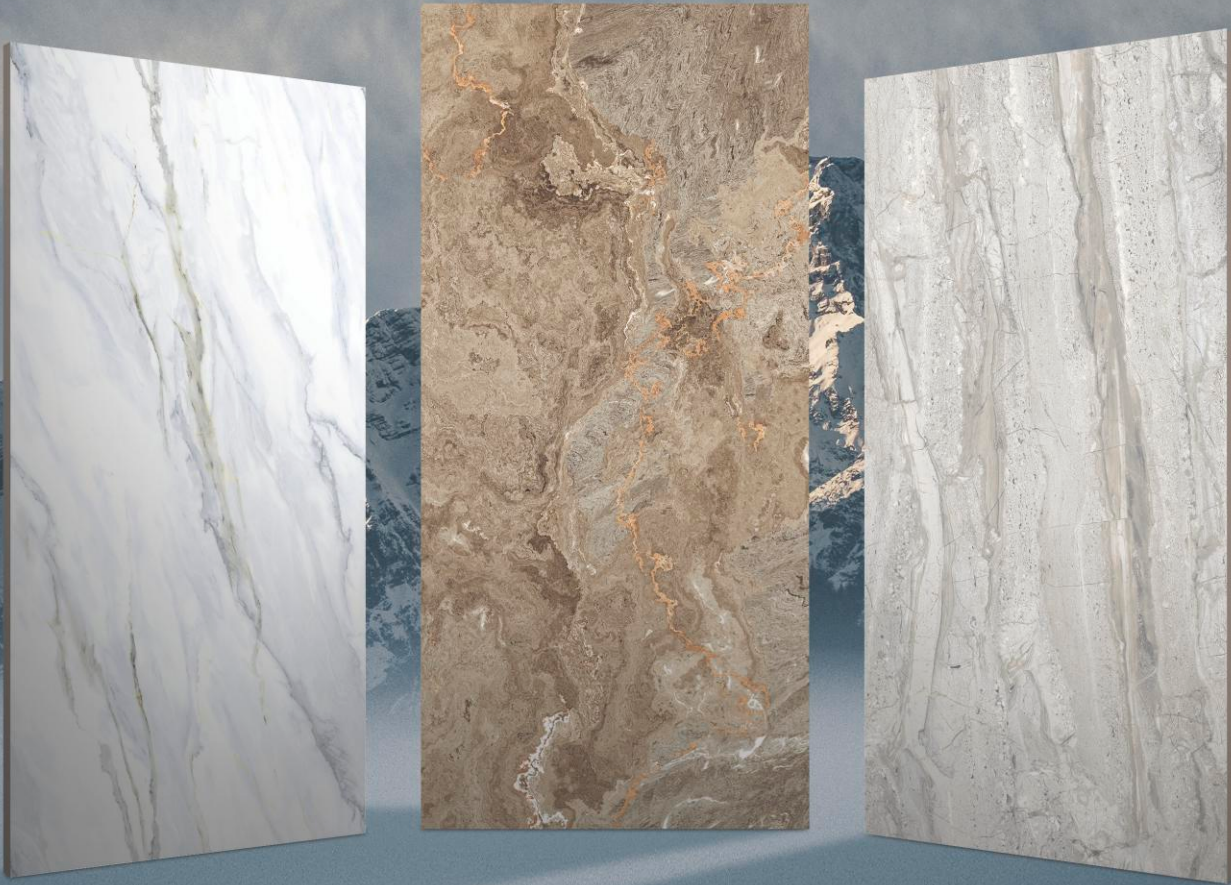


HD DIGITAL TILES — COLLECTION —

600 x 1200 mm

UNIT - 3



Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph.: 0120-4627900
Ahmedabad Office: 601 to 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad-382481; Ph.: 079-27661103 & 04
Registered Office: 2, Red Cross Place, Kolkata-700001; Ph.: 033-22487406/5913
www.somanyceramics.com | e-mail: **customer.care@somanyceramics.com**
Toll Free No. 1800-103-0004 (Timing-10:00 am to 6:30 pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic



Find us at:
www.twitter.com/SomanyCeramic



Find us at:
www.instagram.com/SomanyCeramics



NEOLLA / CAT / NOVEMBER-2024

NEOLLA


COLLECTION

Discover the Neolla Collection, featuring an exquisite range of Full Polish, Matt Carving, and Matt Finish tiles, designed to add elegance and style to any space.



SOMANY
NEOLLA

CONTENT

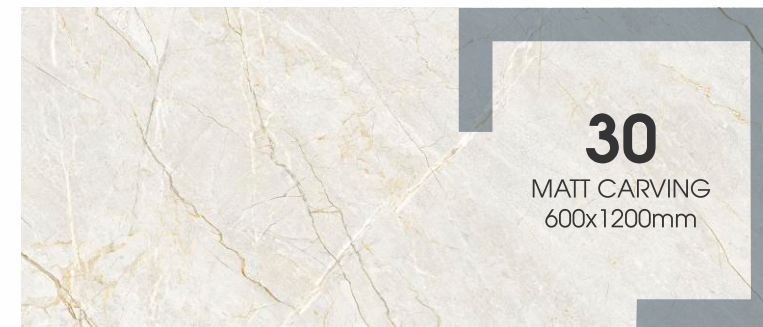

APPLICATION



RESIDENCES



HOTELS



OFFICES



BATHROOMS



KITCHENS



RESTAURANTS



SHOPS



AIRPORTS



RAILWAY
STATIONS



MALLS





VERSATILE
SOLUTIONS



EASIER
TO LAY



RESISTANT TO
CHEMICAL



RESISTANT
TO LOADS



RESISTANT
TO STAINS




EON ANCONA DAINO FP

V4



360°

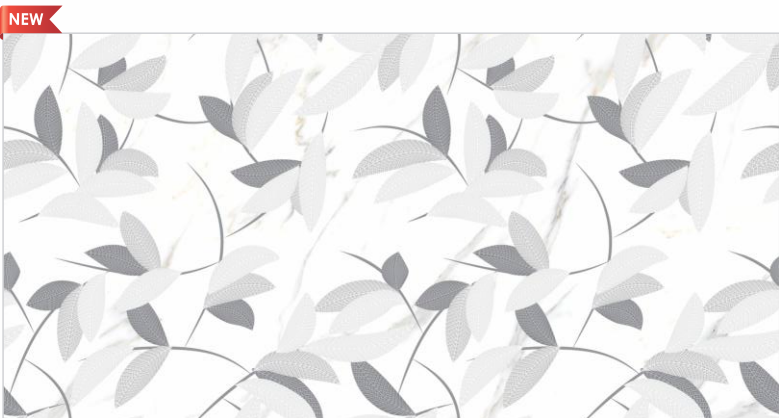


EON AURA STATUARIO FP

V1



360°

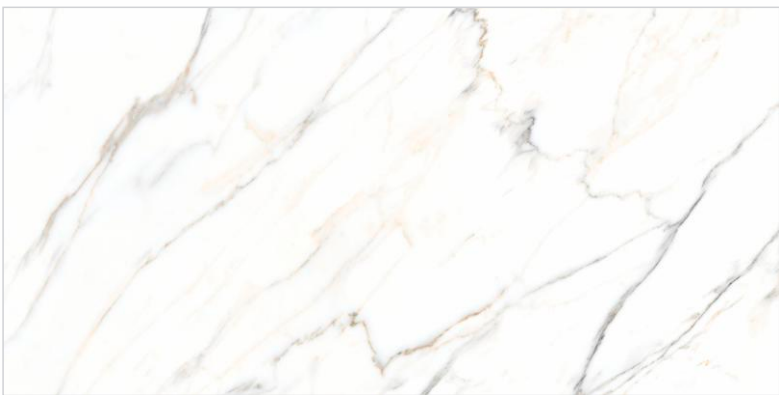

EON AURA STATUARIO FP

V4



360°



EON CESENA CREMA FP

V4



360°



EON CESENA DECOR FP

V1



360°



EON CESENA BROWN FP

V4



360°





VERSATILE
SOLUTIONS



EASIER
TO LAY



RESISTANT TO
CHEMICAL



RESISTANT
TO LOADS



RESISTANT
TO STAINS



EON ELEGANZA CREMA FP

V4



360°




EON ELEGANZA BEIGE DECOR FP

V1



360°

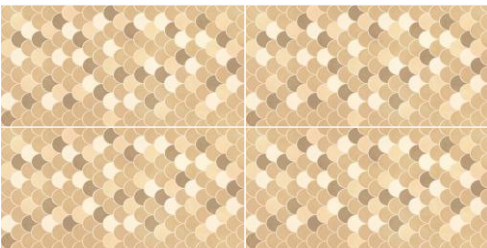


EON ELEGANZA BEIGE FP

V4



360°

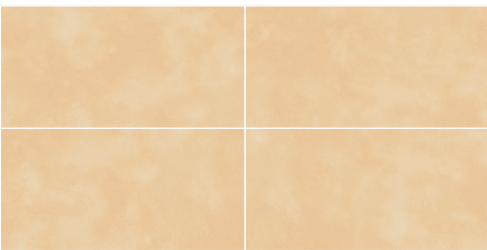


EON ELEGANZA SKY LIGHT FP

V4



360°

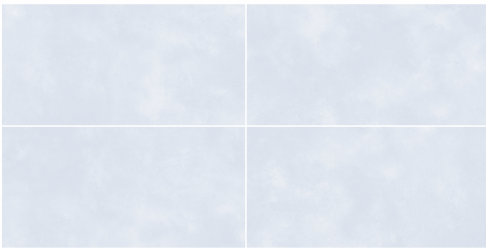

EON ELEGANZA SKY DECOR FP

V1



360°




EON ELEGANZA SKY DARK FP

V4



360°

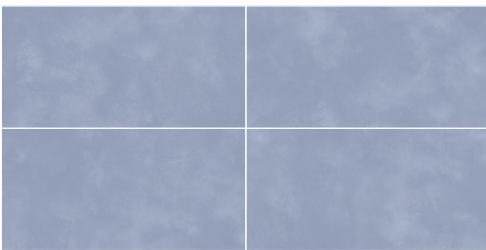



VERSATILE
SOLUTIONS



EASIER
TO LAY



RESISTANT TO
CHEMICAL



RESISTANT
TO LOADS



RESISTANT
TO STAINS



EON ELEGANZA ROSE LIGHT FP

V4



360°




EON ELEGANZA ROSE DECOR FP

V1



360°

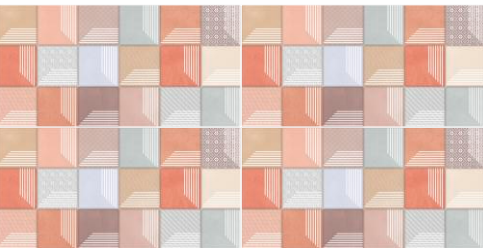


EON ELEGANZA ROSE DARK FP

V4



360°

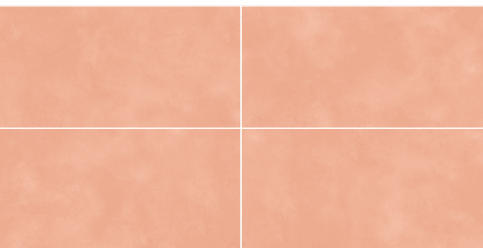


EON ELEGANZA ROSE LIGHT FP

V4



360°

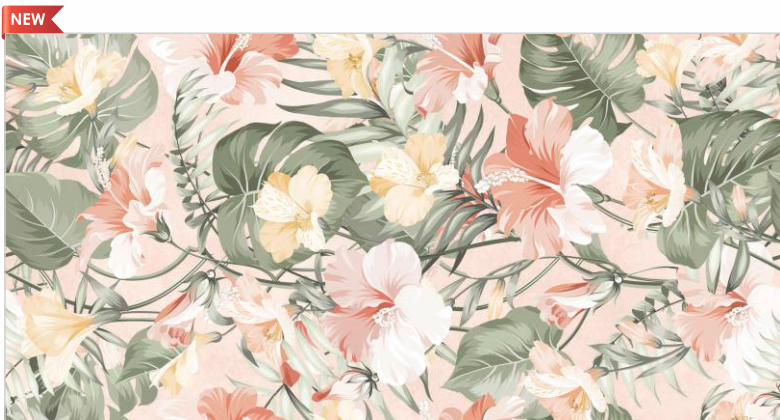

EON ELEGANZA ROSE DÉCOR 02 FP

V1



360°




EON ELEGANZA ROSE DARK FP

V4



360°

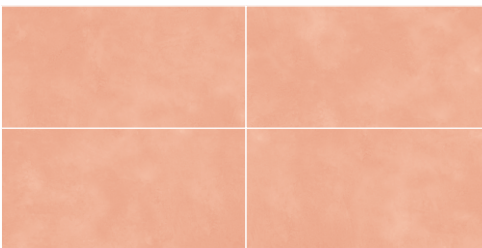



EON ELEGANZA OLIVE DECOR 01, LIGHT & DARK FP



VERSATILE
SOLUTIONS



EASIER
TO LAY



RESISTANT TO
CHEMICAL



RESISTANT
TO LOADS



RESISTANT
TO STAINS



EON ELEGANZA OLIVE LIGHT FP

V4



360°





EON ELEGANZA OLIVE LIGHT FP

V4



360°

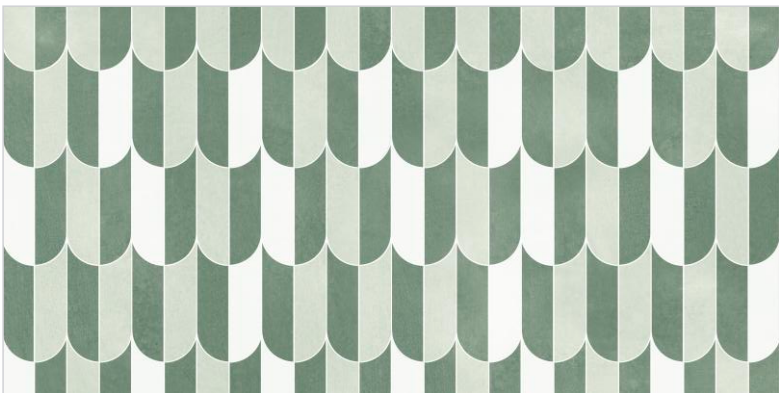
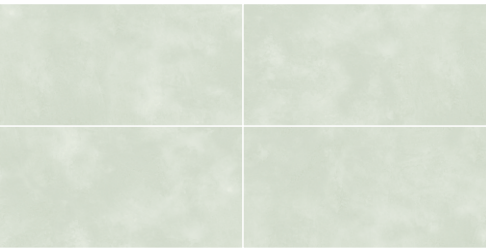


EON ELEGANZA OLIVE DECOR 01 FP

V1



360°

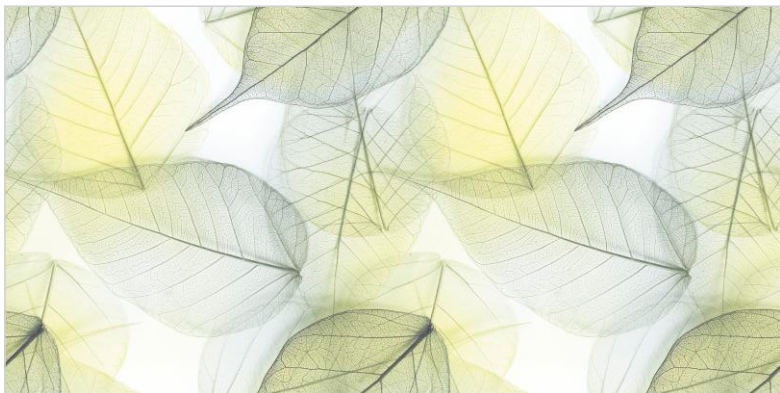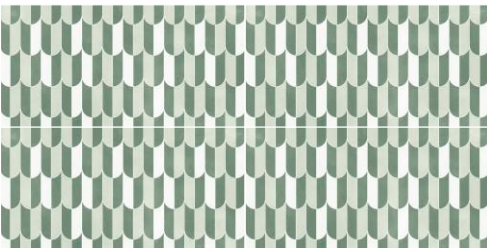

EON ELEGANZA OLIVE DECOR 02 FP

V1



360°




EON ELEGANZA OLIVE DARK FP

V4



360°

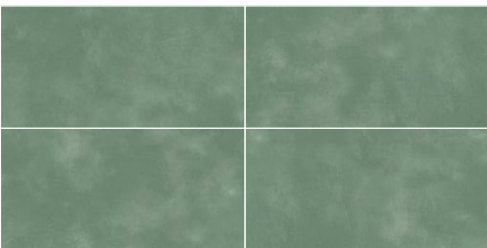


EON ELEGANZA OLIVE DARK FP

V4



360°

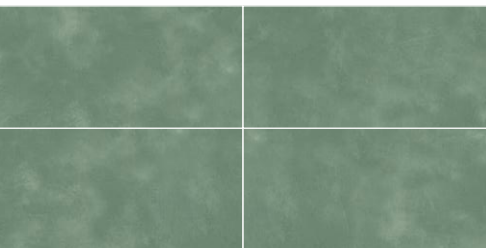



VERSATILE
SOLUTIONS



EASIER
TO LAY



RESISTANT TO
CHEMICAL



RESISTANT
TO LOADS



RESISTANT
TO STAINS




EON CAOLINO STATUARIO FP

V4



360°


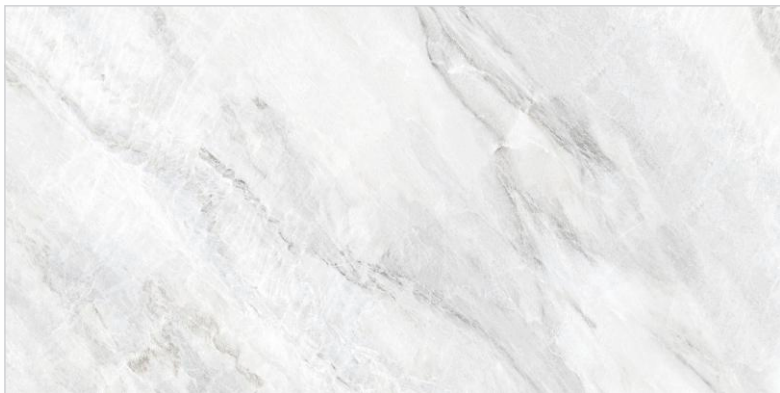


EON MALINI GREY LIGHT FP

V4



360°

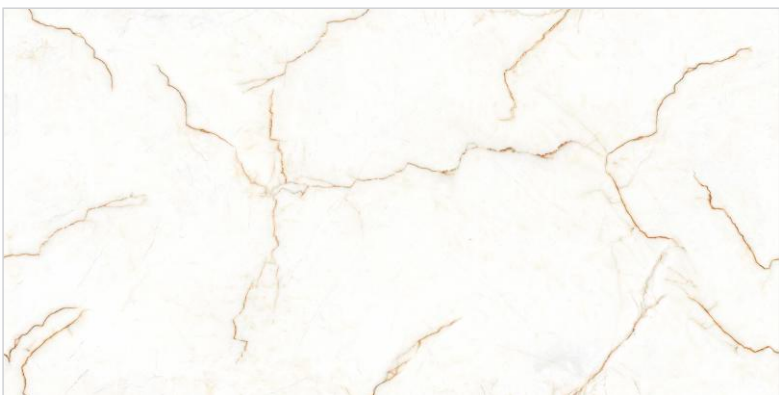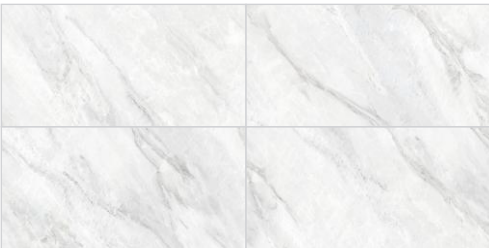


EON ELIT BIANCO FP - ENDLESS

V4



360°


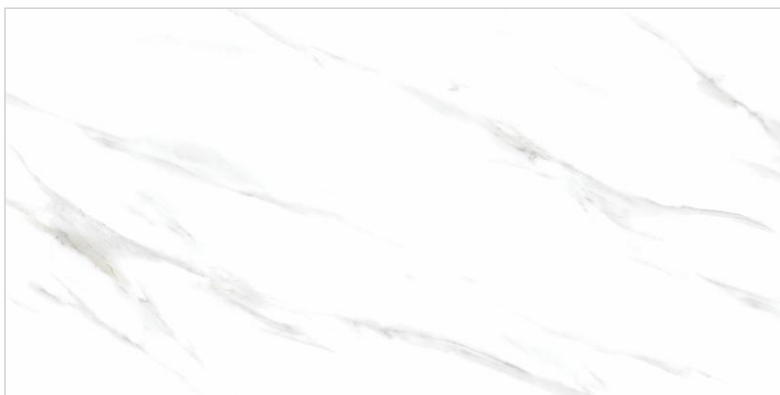


EON KAUNAS STATUARIO FP

V4



360°

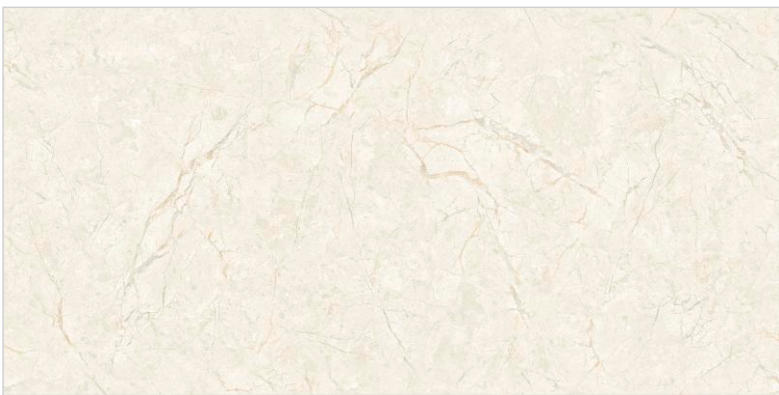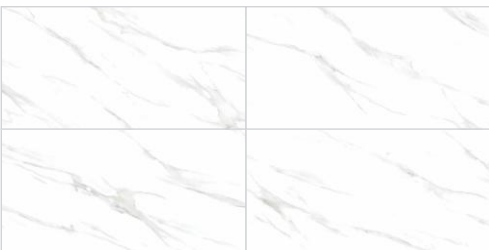


EON EVOLIC CREMA FP - ENDLESS

V4



360°

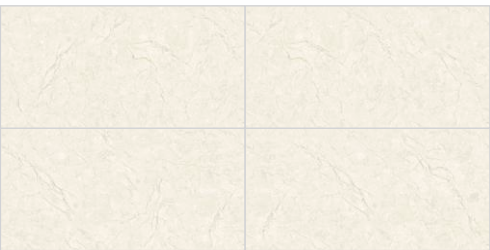

EON OCEANIC BLUE FP

V4



360°





EON RODEN SILVER DECOR & SILVER FP



VERSATILE
SOLUTIONS



EASIER
TO LAY




RESISTANT TO
CHEMICAL



RESISTANT
TO LOADS



RESISTANT
TO STAINS


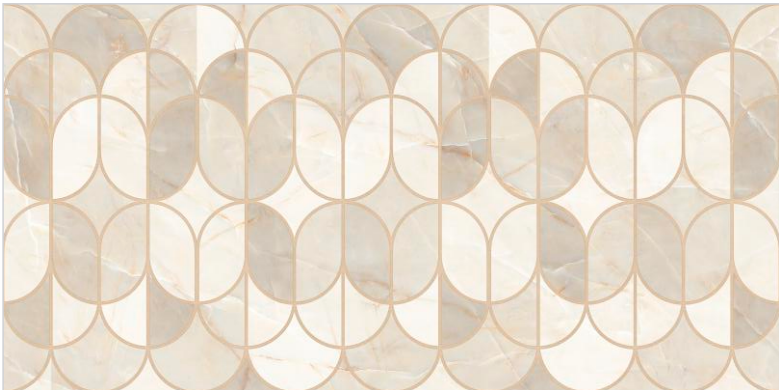


EON RODEN CREMA DECOR FP

V1



360°

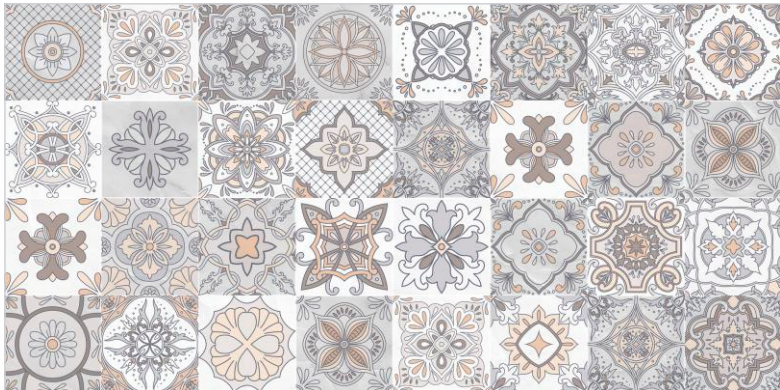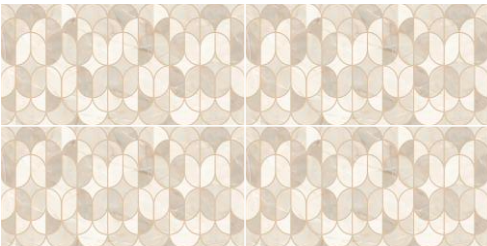

EON RODEN SILVER DECOR FP

V1



360°



EON RODEN CREMA FP - ENDLESS

V4



360°



EON RODEN SILVER FP - ENDLESS

V4



360°





SOMANY
NEOLLA

EON SIGNETIC BROWN FP



VERSATILE
SOLUTIONS



EASIER
TO LAY



RESISTANT TO
CHEMICAL



RESISTANT
TO LOADS



RESISTANT
TO STAINS




EON SAUVAGE BEIGE FP

V4



360°

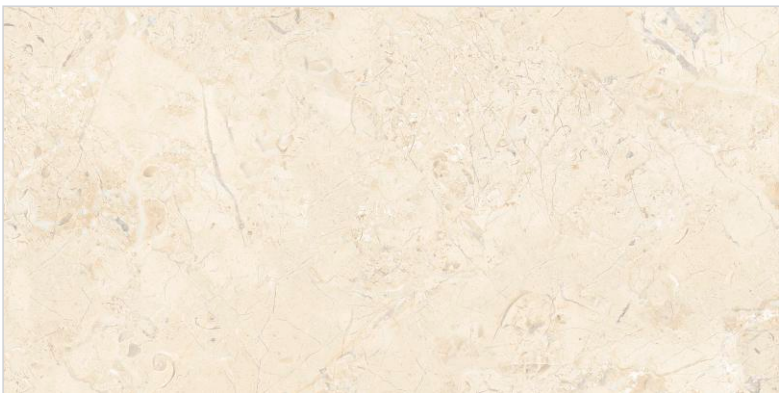


EON SAUVAGE CREMA FP

V4



360°

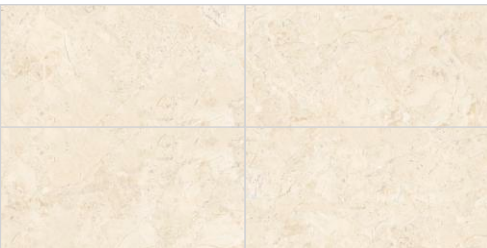

EON SIGNETIC BROWN FP

V4



360°



EON SIGNETIC CREMA FP

V4



360°



EON SIGNETIC DARK GREY FP

V4



360°




EON SIGNETIC LIGHT GREY FP

V4



360°

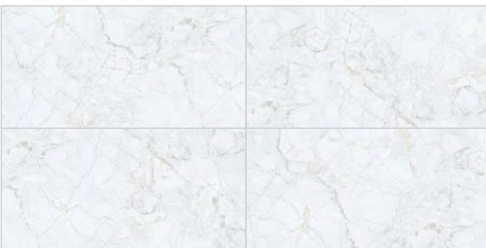



VERSATILE
SOLUTIONS



EASIER
TO LAY




RESISTANT TO
CHEMICAL



RESISTANT
TO LOADS



RESISTANT
TO STAINS


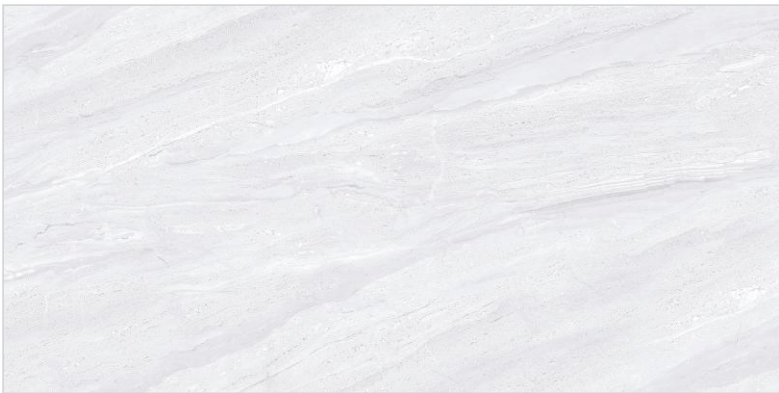


EON SIARA SILVER FP

V4



360°

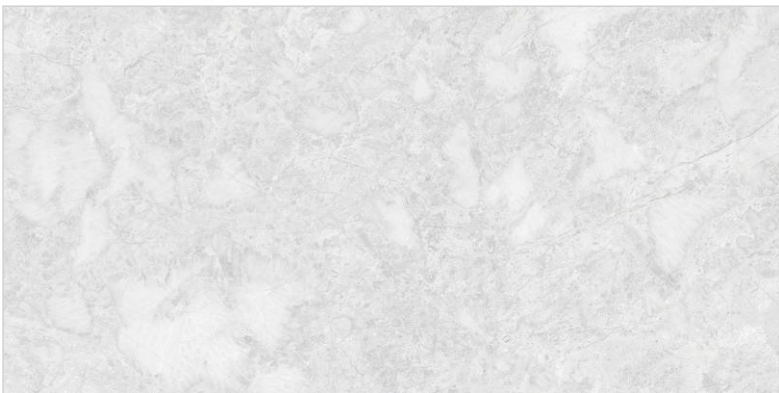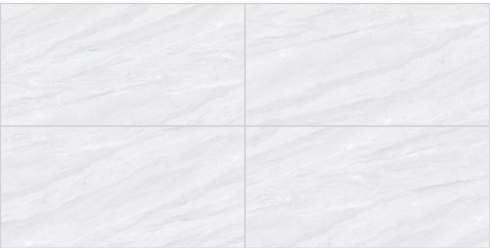


EON SOLESTE GREY FP

V4



360°

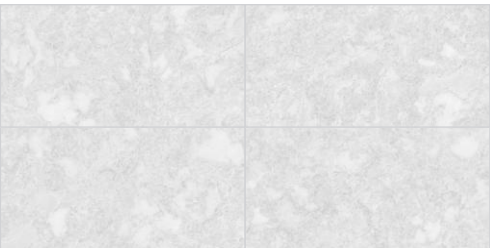


EON SOLESTE NERO FP

V4



360°

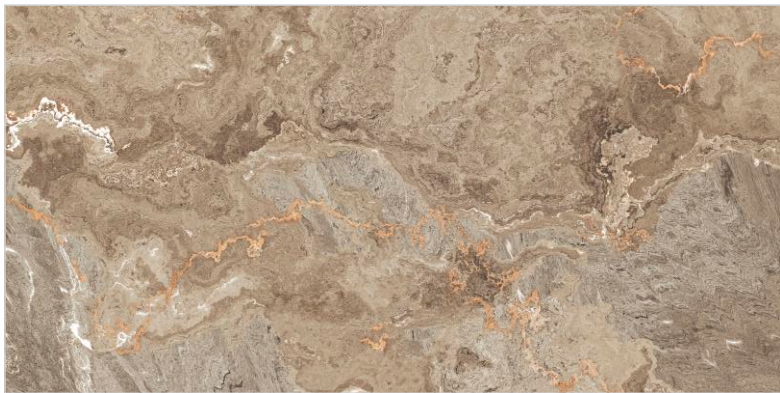


EON STABIA BROWN FP

V4



360°

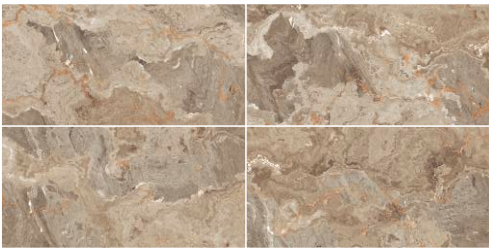

EON STABIA NATURAL FP

V4



360°



EON WAVE STATUARIO FP

V4



360°





SOMANY
NEOLLA

EON COSMIC BEIGE CR - ENDLESS



VERSATILE
SOLUTIONS



EASIER
TO LAY



RESISTANT TO
CHEMICAL



RESISTANT
TO LOADS



RESISTANT
TO STAINS




360°




EON COSMIC BEIGE CR - ENDLESS

V4

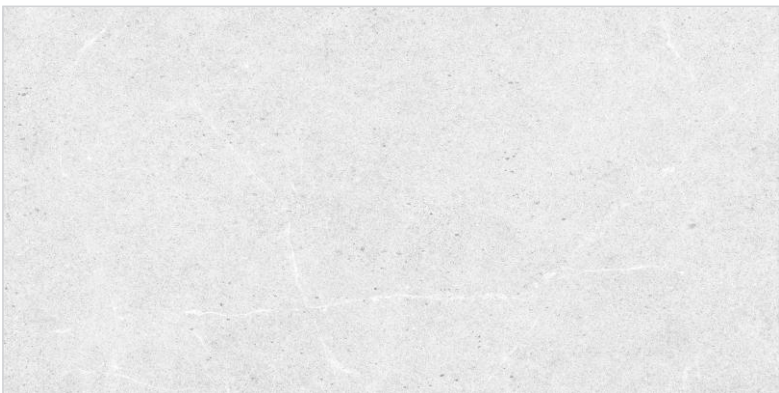

360°

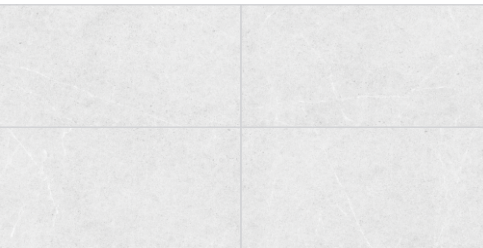


EON DAMIANO GREY CR

V4



360°

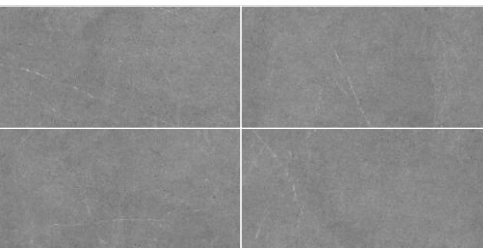


EON DAMIANO NERO CR

V4



360°

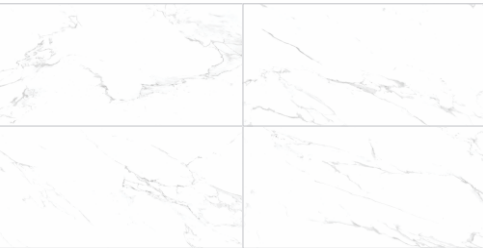

EON ELEGANCE STATUARIO CR

V4



360°



EON TANTALO BROWN CR

V4



360°



EON TANTALO IVORY CR

V4



EON ARPEGGIO DECOR, LIGHT & DARK MATT



VERSATILE
SOLUTIONS



EASIER
TO LAY



RESISTANT TO
CHEMICAL



RESISTANT
TO LOADS



RESISTANT
TO STAINS



EON ARPEGGIO LIGHT MATT

V4



360°



EON ARPEGGIO DECOR MATT

V1



360°




EON ARPEGGIO DARK MATT

V4



360°

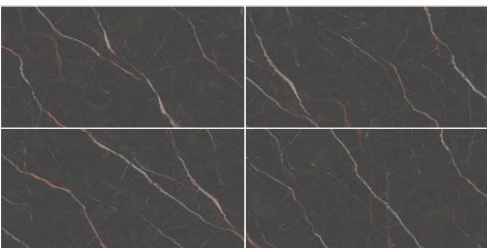

EON VERDANT MINT LIGHT MATT

V4



360°



EON VERDANT MINT DECOR MATT

V1



360°



EON VERDANT MINT DARK MATT

V4



360°





VERSATILE
SOLUTIONS



EASIER
TO LAY



RESISTANT TO
CHEMICAL



RESISTANT
TO LOADS



RESISTANT
TO STAINS

NEW




EON ELEGANZA SKY LIGHT MATT


V4



360°

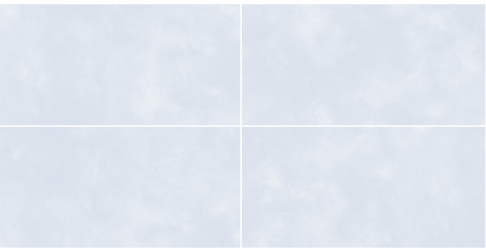

NEW

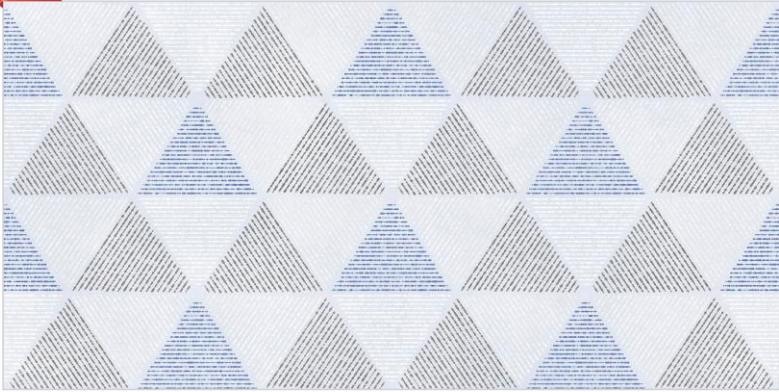


EON ELEGANZA SKY DÉCOR 01 CR

V1



360°

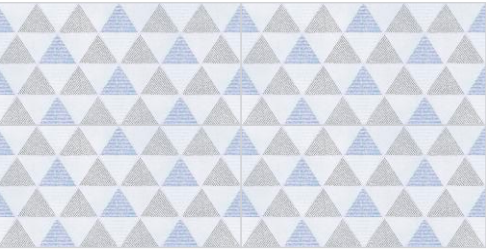

NEW




EON ELEGANZA SKY DARK MATT

V4



360°

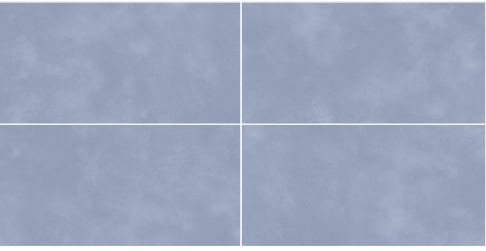

NEW



EON ELEGANZA CREMA MATT

V4



360°



NEW



EON ELEGANZA BEIGE DÉCOR 01 CR

V1



360°



NEW




EON ELEGANZA BEIGE MATT

V4



360°



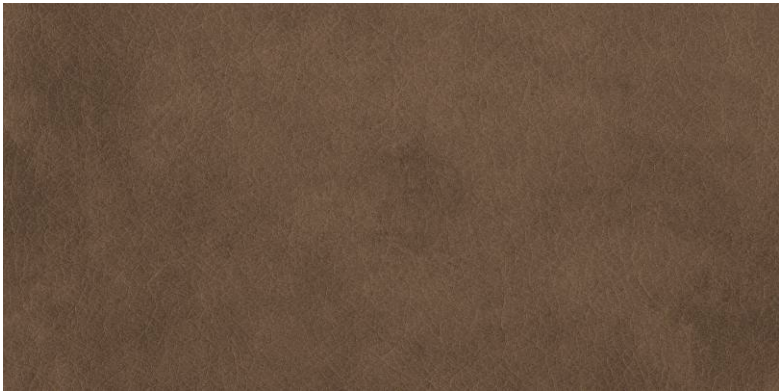

EON LUMIERE BROWN MATT

V4



360°




EON LUMIERE CREMA MATT

V4



360°

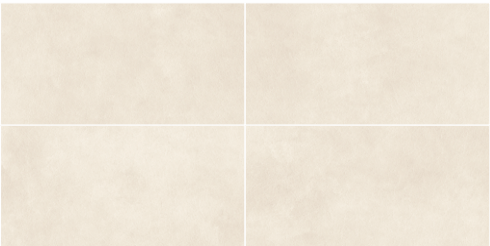


SOMANY
NEOLLA

EON LUMIERE CREMA MATT

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.

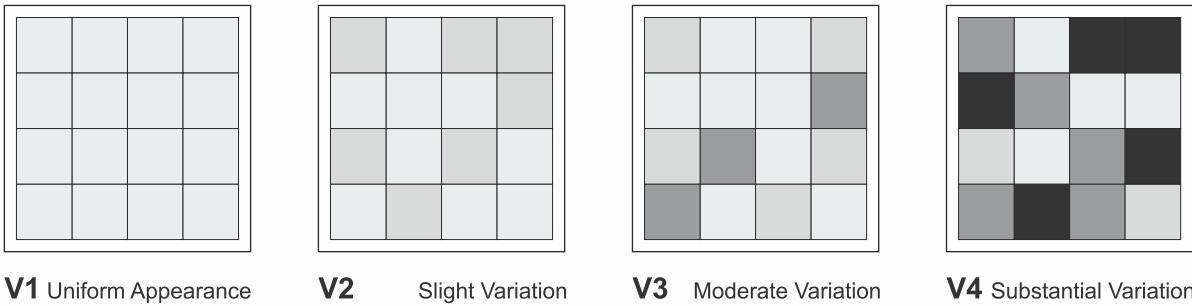

The classification is as follow:
V1 Minimal Variation **V2** Slight Variation **V3** Random Variation **V4** Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles.

For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder. And use with spacer to look good

PACKING DETAIL FOR 600x1200 mm NEOLLA				
Nominal Size	Thickness(mm)	Av. Wt. per carton (Kg)	No. of Tiles per carton	Coverage area per carton
600X1200mm (Eon Series)	8.5	27.5	2	1.44sq.mtr./15.50sq.ft.

TECHNICAL SPECIFICATION FOR 600x1200 mm NEOLLA					
Characteristics		Requirement as per IS 15622 :2017 0.08 < E ≤ 3% Group B I b	Requirement as per ISO 13006:2018 0.5 ≤ E ≤ 3% Group B I b	Our Values	Test Method
A	Dimension & Surface Quality				
	i	Length & Width	± 0.1%	± 0.3%	± 0.1%
	ii	Thickness	± 5.0%	± 5.0%	± 4.0%
	iii	Straightness of Side	± 0.1%	± 0.3%	± 0.1%
	iv	Rectangularity	± 0.1%	± 0.3%	± 0.1%
	v	Surface Flatness			
	a	Center Curvature (Max.Deviation)	± 0.5%	± 0.4%	± 0.2 %
	b	Edge Curvature (Max.Deviation)	± 0.5%	± 0.4%	± 0.2 %
	c	Corner Warpage (Max.Deviation)	± 0.5%	± 0.4%	± 0.2 %
	vi	Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects
B		Physical Properties			
I		Water Absorption	Av 0.08 < E ≤ 3%, Individual 3.3 max	Av 0.5 < E ≤ 3%, Individual 3.3 max	Av E ≤ 3.0 %
ii		Modulus of Rupture [N/mm²]	Avg. 30, Individual 27 Min	Avg. 30, Individual 27 Min	Avg. > 30
iii		Breaking Strength in N	Min. 1100	Min. 1100	Min. 1100
iv		Moisture Expansion in mm/m	0.02	Test Method Available	0.02
v		Scratch Hardness of Surface (Mohs)	Min 5	N.A	Min.5 (for Matt, Carving), Min.3 (for Polished)
vi		Resistance to Abrasion of Glazed Tiles (Class I to V)	Min II	Abrasion Class & Cycle passed	Class-IV(for Matt, Carving), Class-III(for Polished)
vii		Coefficient of Linear Thermal Expansion from Ambient Temperature to 100 0 C	7 X 10 ⁻⁶ K ⁻¹ max	Test Method Available	Max 6 X 10 ⁻⁶ K ⁻¹ max
viii		Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed
ix		Crazing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed
x		Impact Resistance as Co-efficient of Restitution (COR)	0.55 Min	Test Method Available	Min 0.55
xi		Frost Resistance	Required	Required	100 Cycle Passed
C		Chemical Resistance (Glazed Tiles)			
I		Stain Resistance	Min Class 1	Min Class 3	Min Class-1(For Matt, Carving), Min Class-2(for Polished)
ii		Resistance to Household Chemicals	Min Class AA	Min B	Min Class AA
iii		Resistance to Acids and Alkalis (with exception of Hydrofluoric Acid and its compounds)	Required if agreed	Declared Value ^f	Min Class AA

Notes

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. “ Technical Specification” for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

SOMANY
Bathware

Our PORTFOLIO



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Ezy Fix
TILES ADHESIVES & GROUTS

SOMANY



HIGH STRENGTH POLYMER MODIFIED TILE ADHESIVE



BENEFITS

- » READY AND EASY TO USE
- » EXCELLENT BONDING WITH ALL SURFACES
- » FAST SETTING
- » SELF-CURING

USES

- » FOR FIXING ALL TYPE OF TILES
- » FOR NEW FLOORING AND RENOVATION
- » CAN BE USED FOR TILE ON TILE