



Power of Desire



SOMANY

Somany Ceramics Limited: Noida: F-36, Sector-6; Ph.: 0120-4627900.

Ahmedabad: 601 to 606, 6th floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S. G, Highway, Ahmedabad- 382481, Ph.: 079-27661103 & 04 Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913

www.somanyceramics.com I e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)












Available on the App Store Google play

Ceramisa



ZAMEEN SE JUDEY

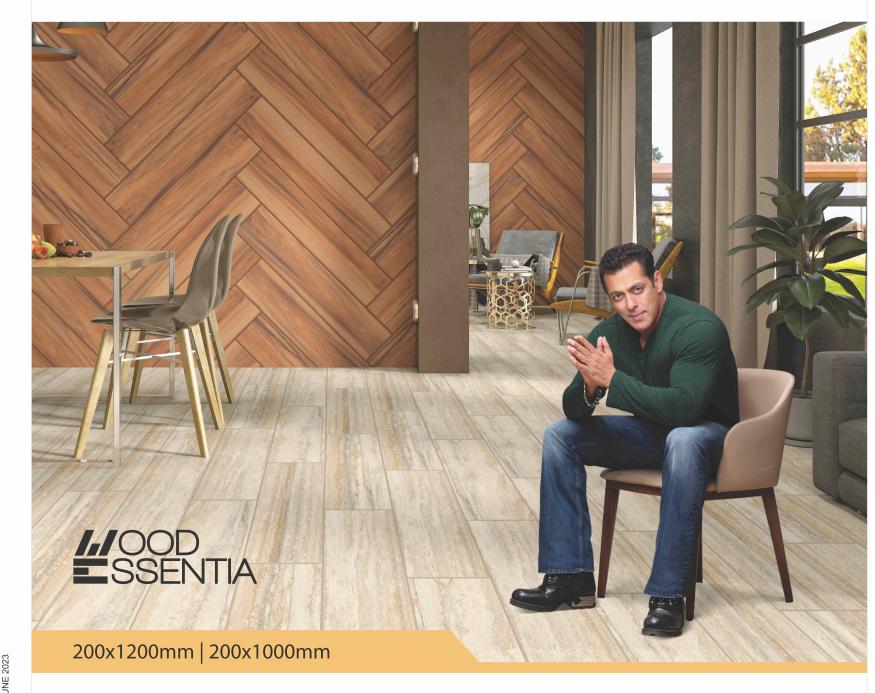

WOOD ESSENTIA

COLLECTION ___



ceramic Wood Essentia tiles - a unique and versatile addition to any space. With their natural wood figure and rich texture, these tiles perfectly capture the timeless beauty of natural wood, while offering the durability and easy maintenance.

Experience the beauty and versatility of our ceramic Wood Essentia tiles and transform your space into a stunning and inviting oasis

ECO-FRIENDLY & HYGIENIC



RESISTANCE TO UV RAYS



FIREPROOF



NATURAL TEXTURE



PROTECTING NATURE



NATURAL FEELING





ADVANTAGES

Easy to cleaning

↓ Durable

Highly resistant to abrasion, staining and chemicals

Protect water seepage

* Anti skid

Random designs

Inspired from real wood






THE BEAUTY DERIVED

FROM NATURE



Nature is the ultimate artist, and our products are a tribute to its stunning artistry. Our collection of 200x1200mm Wood Essentia tiles is inspired by the beauty and wonder of the natural world, and we are proud to bring a piece of that artistry into your home.



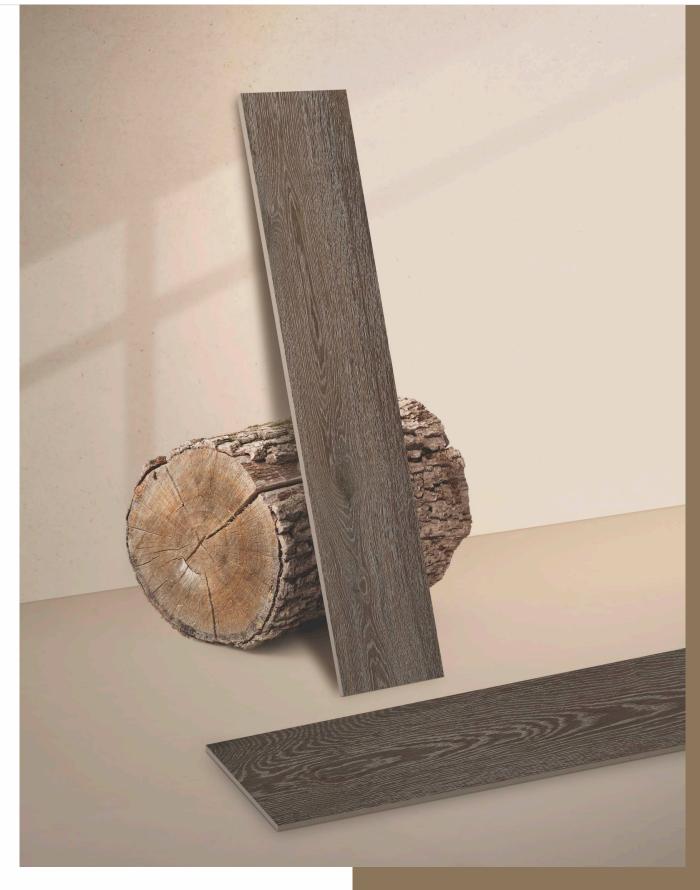









THE NATURE'S **ARTISTRY**





200x 1200mm









GOOD**WOOD**







ESSENTIA ALBAWOOD HAYA V4

GOOD WOOD D



ESSENTIA ALBAWOOD TEAK V4

GOOD**WOOD**



ESSENTIA AUSTINWOOD DECOR

V3

GOOD**WOOD**



ESSENTIA AUSTINWOOD NATURAL

V2





200x 1200mm





















ESSENTIA EDORTA COFFEE

M A T T F I N I S H

V4

200x 1200mm











ESSENTIA MATEOWOOD DECOR 02

V4

GOOD**WOOD**



ESSENTIA MATEOWOOD TEAK

V4





1Ω





V4

200x 1200mm









GOOD**WOOD**







ESSENTIA OBERRON NATURAL V3







ESSENTIA SIGNO TRAVERTINO CAFE

R







ESSENTIA SIGNO TRAVERTINO MARFIL

R



Transform your space with the natural beauty and warmth of wooden tiles! Our collection of Wood Essentia tiles offers a variety of colours to choose from, allowing you to create a unique and personalized look that reflects your style and taste.













DISCOVER THE **BEAUTY AND ELEGANCE**





V4

200x 1000mm









GOOD**WOOD**







ESSENTIA ABALON WOOD

GOOD WOOD D







ESSENTIA FREYA WOOD V4

GOOD**WOOD**



ESSENTIA RIOJA WOOD

GOOD**WOOD**





V4



NEO ESSENTIA NATURAL V3



200x 1000mm









GOOD**WOOD**







NEO ESSENTIA BEIGE V4

GOOD WOOD D







NEO ESSENTIA COFFEE V3

GOOD**WOOD**





V4

V4



NEO ESSENTIA CREST DARK

GOOD**WOOD**







NEO ESSENTIA OCAR





MATT FINISH 200x 1000mm







GOOD**WOOD**







NEO ESSENTIA SCRATCH

GOOD WOOD D



NEO ESSENTIA TIMBER V4







NEO ESSENTIA TRAVERTINO







NEO ESSENTIA TRAVERTINO GRIS

V4

34



200x 1000mm

GOOD**WOOD**



NEO ESSENTIA WENGE V4








DESIGN, PATTERN & SHADE VARIATION GUIDE


Current Development efforts have made ceramic tiles to resemble and look authentically identical to natural materials (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between the two.

Recognising this situation, it is necessary to be informed on the grade of design & Pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of the variation.









V4 Substantial Variation

The classification is as follow:

✓ Minimal Variation ✓ Random Variation ✓ Slight Variation ✓ Substantial Variation



High Definition Image

While Laying the tiles please follow the arrow Mark on the back of the tiles For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talc powder

TECHNICAL SPECIFICATION



39

PACKAGING & TECHNICAL DETAIL FOR 200x1200MM & 200x1000MM TILES

NOMINAL SIZE IN MM	THICKNESS	AVG. WEIGHT PER CARTON (KGS.)	NO. OF TILES PER CARTON	COVERAGE AREA PER CARTON
200X1200mm	10.0 mm	20.84 Kgs. / Box (Appx)	4 Pcs.	0.96 Sq. Mtr / 10.33 Sq. Ft.
200X1000mm	8.0 mm	20.96 Kgs. / Box (Appx)	6 Pcs.	1.2 Sq. Mtr / 12.912 Sq. Ft.

Characteristics	Requirement as per IS 15622 :2017 Table-07, W.A 3< E <6 Group B IIa	Requirement as per ISO 13006 Annex-J, W.A-3 <e<6 biia<="" group="" th=""><th>Our Values</th><th>Test Method</th></e<6>	Our Values	Test Method	
Dimension & Surface Quality					
Length & Width %	± 0.10%	± 0.30%	± 0.10%	IS 13630 Part 1/ ISO 10545-2	
Thickness %	± 5.00%	± 5.00%	± 4.0%		
Straightness of Side %	± 0.10%	± 0.30% ± 0.30%	± 0.10% ± 0.10%		
Rectengularity %	± 0.10%				
Surface Flatness					
Center Curvature (%) (Max. Dev.)	± 0.50%	± 0.40%	± 0.20 %		
Edge Curvature (%) (Max. Dev.)	± 0.50%	± 0.40%	± 0.20 %		
Corner Warpage (%)(Max. Dev.)	± 0.50%	± 0.40%	± 0.20 %		
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects		
Physical Properties					
Water Absorption	Average 3 % <e<6.0 %,<br="">Individual Maximum 6.2</e<6.0>	Average 3 % <e<6.0 %,<br="">Individual Maximum 6.5</e<6.0>	MAX 4.5%	IS 13630 Part 2/ ISO 10545-3	
Modulus of Rupture [N/mm2]	Av 22 Individual 20 Min	Av 22 Individual 20 Min	Min 25 Min 1100	IS 13630 Part 6/ISO 10545-4	
Breaking Strength in N	Min 1000	Not less than 1000			
Moisture Expansion in mm/m	0.03 Max	Test Method Available	0.03 Max	IS 13630 Part 3/ISO-10545-10	
Scratch Hardness of Surface (Mohs)	Min 4	NA	Polished 5	IS 13630 Part 13	
Resistance to Abrasion of UnGlazed tiles	NA	NA	NA	IS 13630 Part 12/ISO 1045-6	
Resistance to Abrasion of Glazed tiles (Class I to V)	Commercial application Min IV, Home Appli. Min II	Report Abrasion Class & Cycle Passed	Commercial application Min IV,	IS 13630 Part 11/ISO 1045-7	
Coefficient of Linear Thermal Expansion from Embiant Temperature to 100° C	9 X 10- ⁶ K- ¹ Max	Test Method Available	7 X 10 -6 K-1 MAX	IS 13630 Part 4/ ISO 10545-8	
Thermal Shock Resistance	10 Cycle Min	Test Method Available	10 Cycle Passed	IS 13630 Part 5/ISO-10545-9	
Crazing Resistance	4 Cycle @ 7.5 bar Min	Required	4 Cycle Passed	IS 13630 Part 9/ISO 10545-11	
Frost Resistance	Required, If Agreed	Test Method Available	Resistance	IS 13630 Part 10/ISO-10545-1	
Bulk Density	NA	NA	NA	IS 13630 Part 2	
Impact resistance	0.55 Min	Test Method Available	0.55 Min	IS 13630 Part 14/ISO 10545-5	
Stain & Chemical Resistance (glazed Tiles)					
Stain Resistance	Min Class 1	Min Class 3	Min Class-1, Class 2 for polish	IS 13630 Part 8/ ISO 10545-14	
Resistance to Household chemicals	Min Class AA	Min Class B	Min Class AA	IS 13630 Part 8/ ISO 10545-1	
Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if Agreed	Manufacturer to state classification	Min.Class-AA		

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. "Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.