



SOMANY

Somany Ceramics Limited : Noida: F-36, Sector- 6; Ph.: 0120-4627900.
Ahmedabad: 601 to 606, 6th floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S. G, Highway, Ahmedabad- 382481, Ph.: 079-27661103 & 04
Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913
www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic



Find us at:
www.twitter.com/SomanyCeramic



Find us at:
www.instagram.com/SomanyCeramics



DURASTONE / CAT / MAY 2024

DURASTONE


HEAVY DUTY VITRIFIED TILES

SOMANY
TILES | BATHWARE

ULTRA STRONG

OUTDOOR VITRIFIED TILES

400 x 400mm


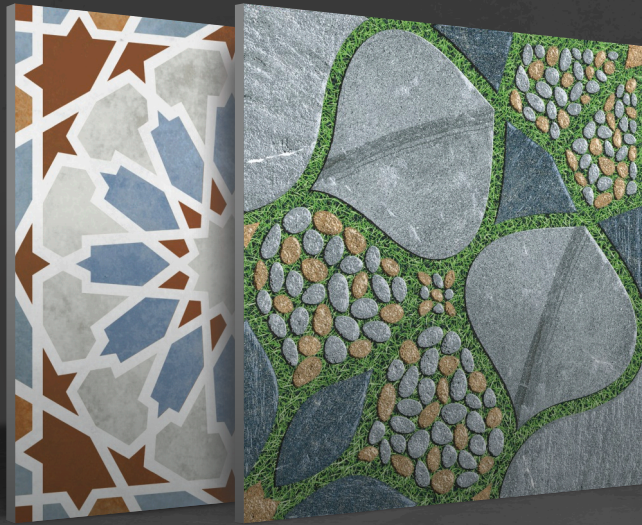


UNIT-3
FOR ALL INDIA

DURASTONE
HEAVY DUTY VITRIFIED TILES

Turkish Touch with Toughest Core


Experience the charm of the Mediterranean with our exquisite 400x400mm Durastone outdoor tiles, harmonizing beautifully with the sandstone ochre. These tiles redefine outdoor aesthetics, offering a remarkable fusion of design and precision. Versatility shines through as these tiles seamlessly fit into various spaces, showcasing a captivating outdoorsy ambiance. Discover a myriad of application possibilities in our catalog, ensuring you embrace the finest essence of the outdoors.

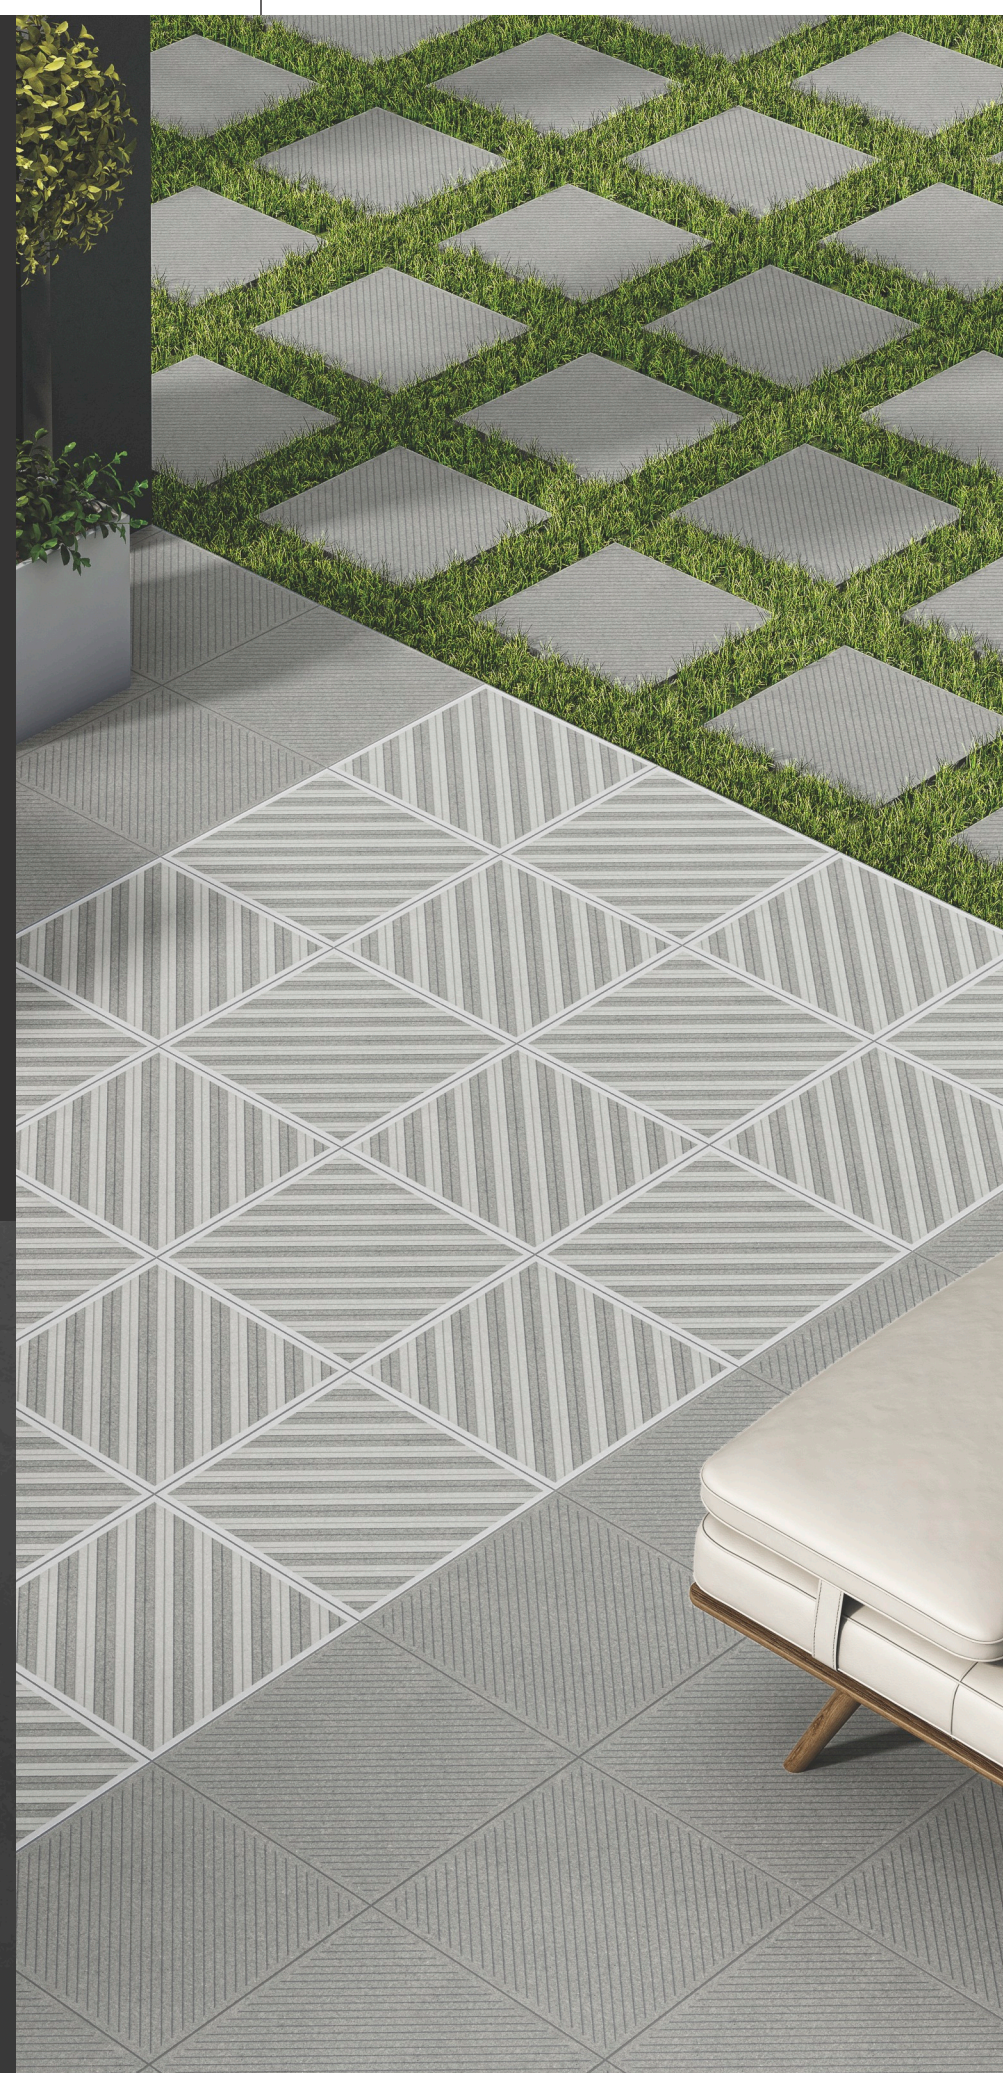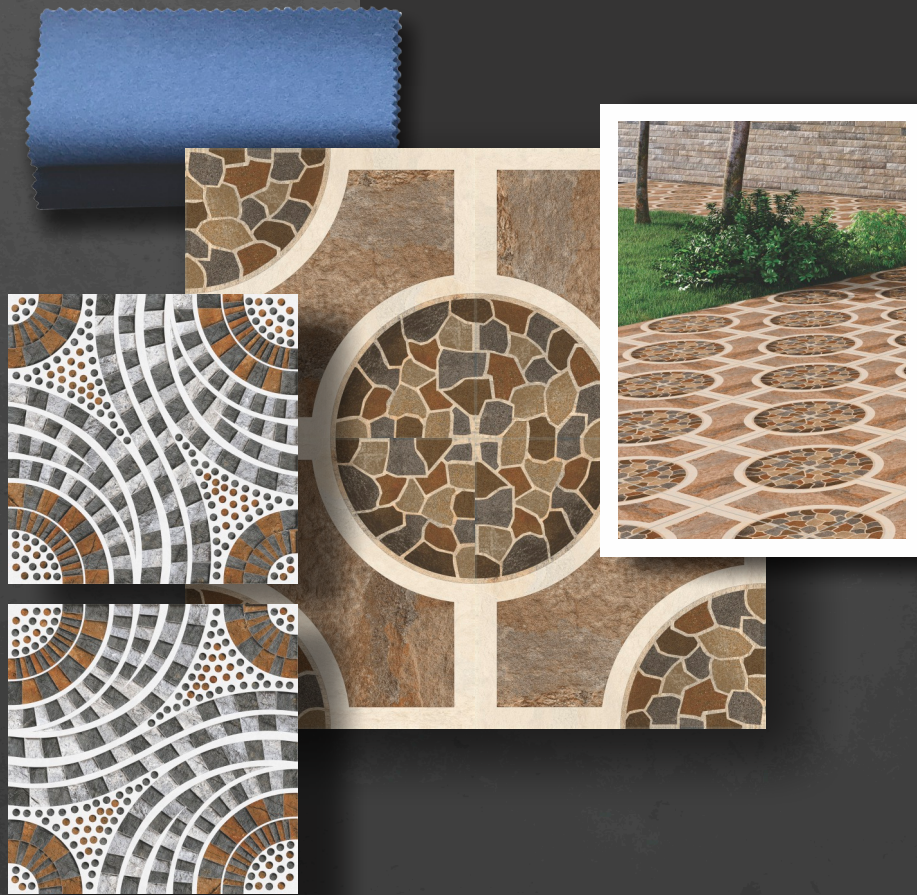


400x
400mm

ULTRA STRONG OUTDOOR VITRIFIED TILES

KEY FEATURES

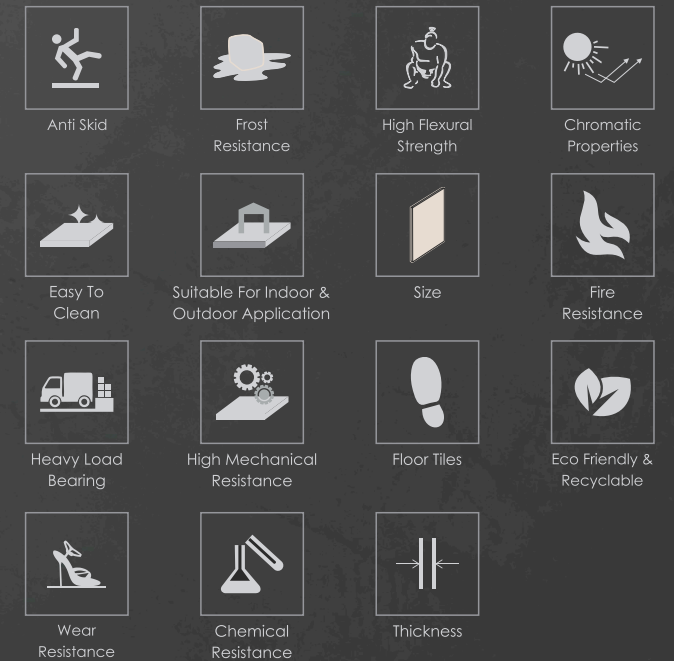

APPLICATION AREA

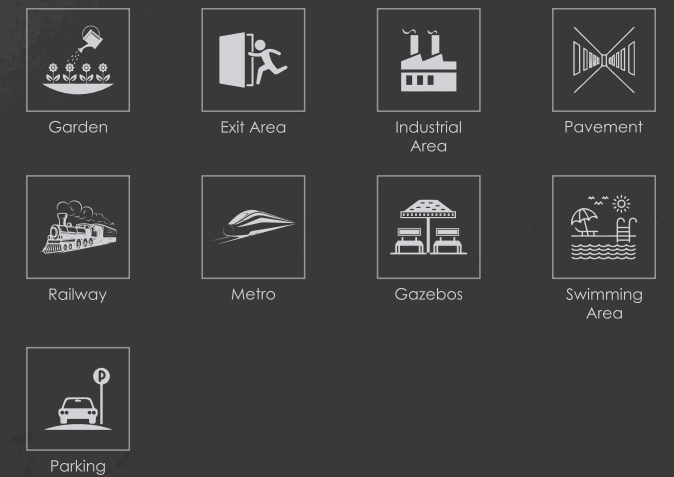



DELANI GREY STONE




DURASTONE
HEAVY DUTY VITRIFIED TILES

ULTRA STRONG
OUTDOOR VITRIFIED TILES


400x
400mm




DURASTONE
HEAVY DUTY VITRIFIED TILES

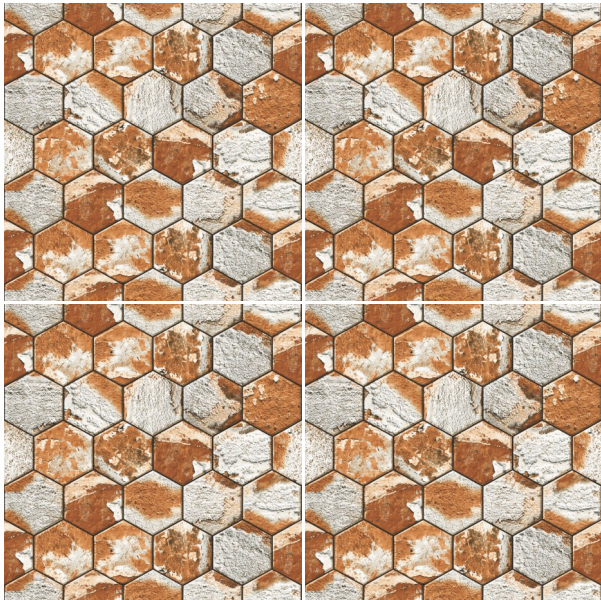


ALOISE BROWN
V1

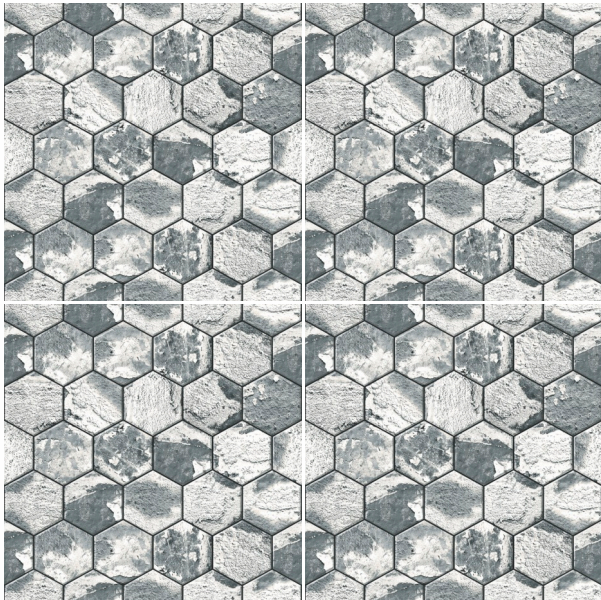


ALOISE GREY
V1

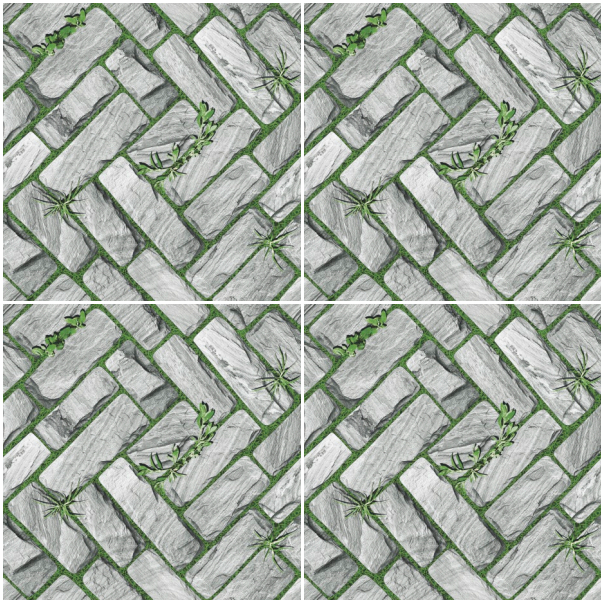


DELANI GREY STONE
V1

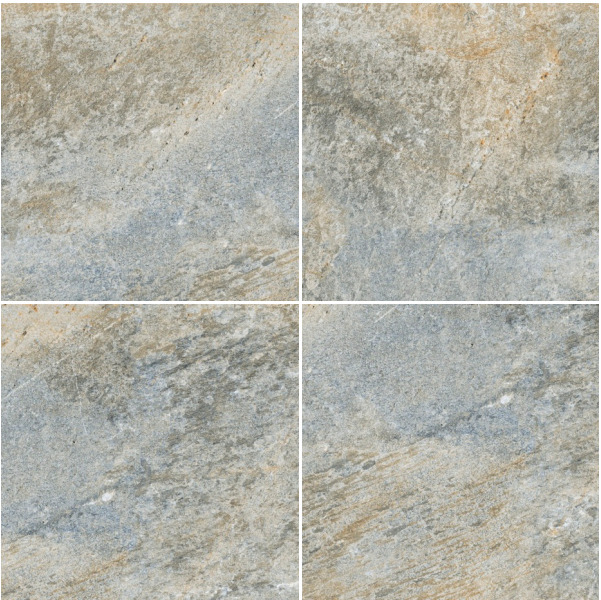

MARTIAL BLUE
V4

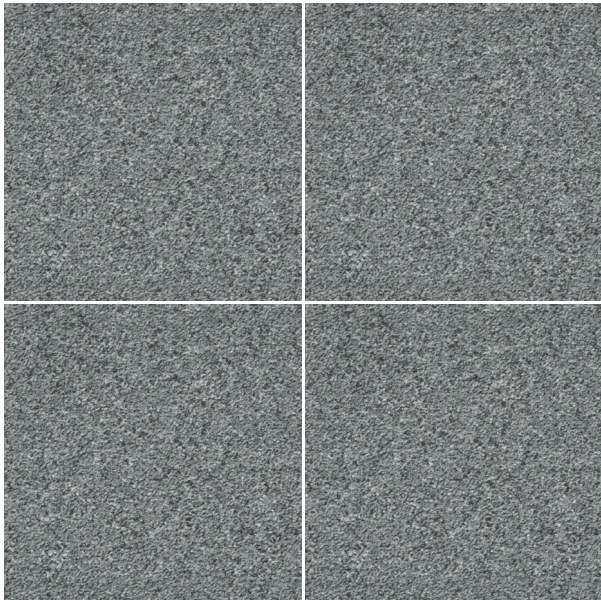


CORINNE GREY DARK
V1

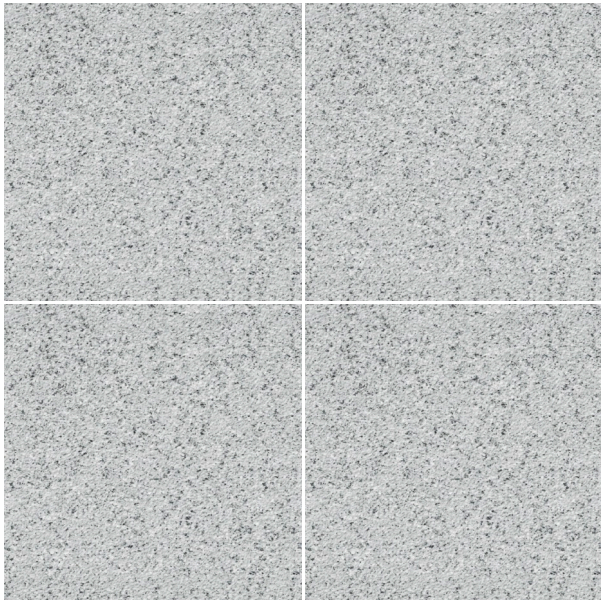

CORINNE GREY LIGHT
V1



PETRUS BROWN
V1

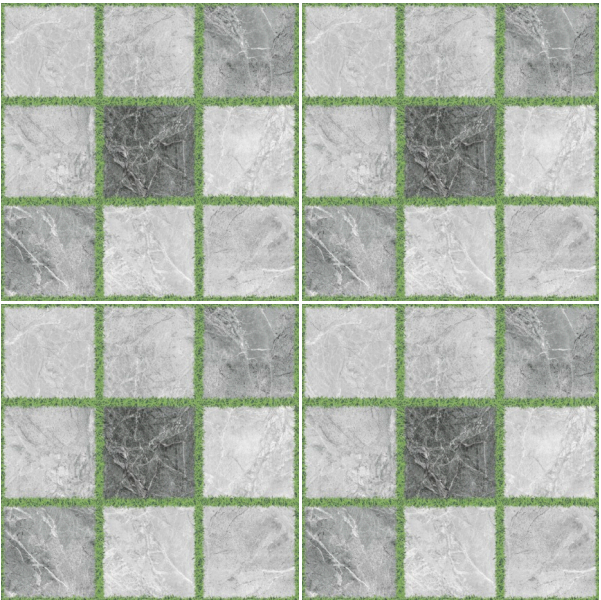

PETRUS GREY
V1



ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm



Anti
Skid



High Flexural
Strength



Wear
Resistance



Fire
Resistance



Frost
Resistance



Chromatic
Properties



Eco Friendly &
Recyclable




Chemical
Resistance


DURASTONE
HEAVY DUTY VITRIFIED TILES




EDITH DÉCOR -01
V1

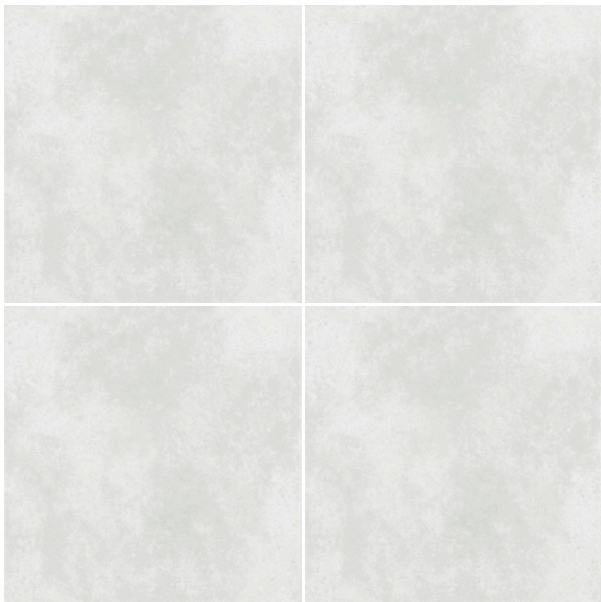

EDITH LIGHT
V1

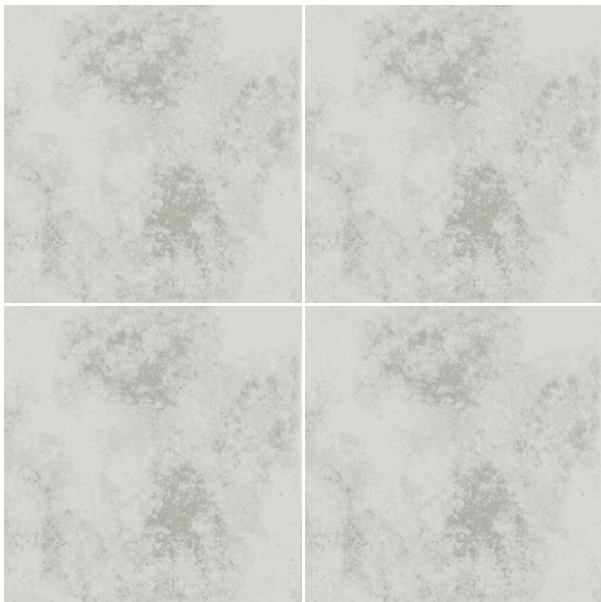


EDITH DARK
V1

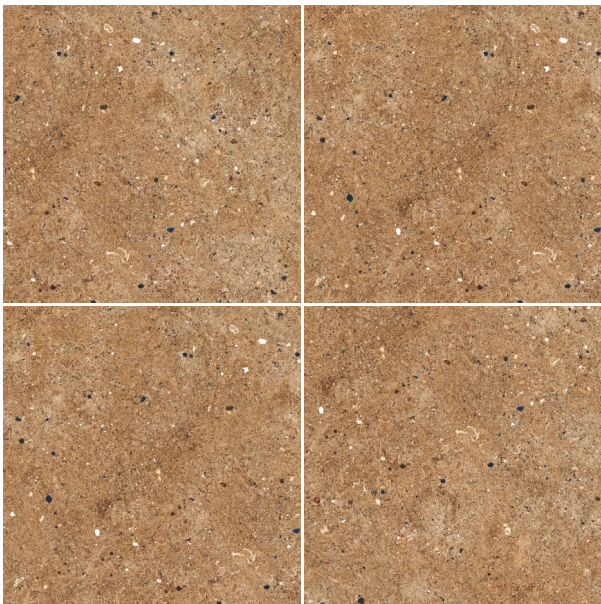

LEONCE BEIGE
V3



SEVERIN CARAMEL
V3

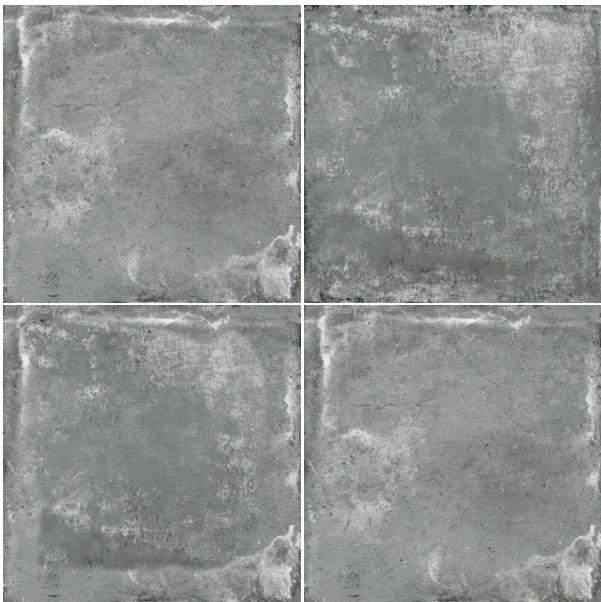

SEVERIN GREY
V3



SEVERIN RUST
V3





DURASTONE[®]
HEAVY DUTY VITRIFIED TILES

CASINO BLUE

ULTRA STRONG
OUTDOOR VITRIFIED TILES


400x
400mm



DURASTONE
HEAVY DUTY VITRIFIED TILES




REGIS BEIGE
V3

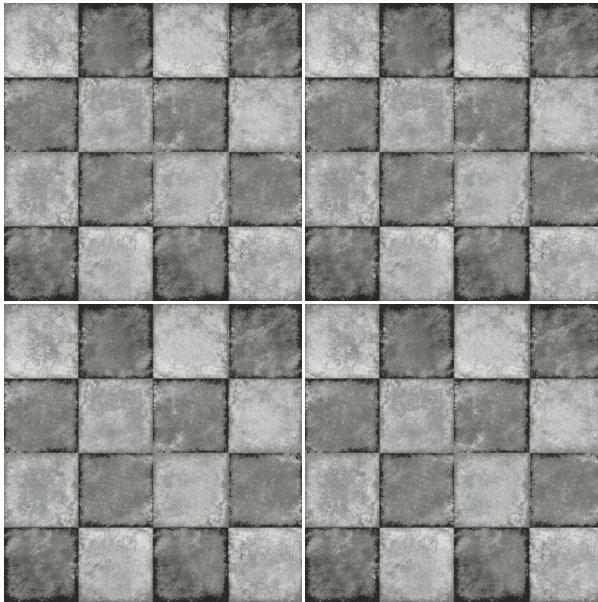


OTHON GREY DARK
V1



ALROCK BEIGE
V3

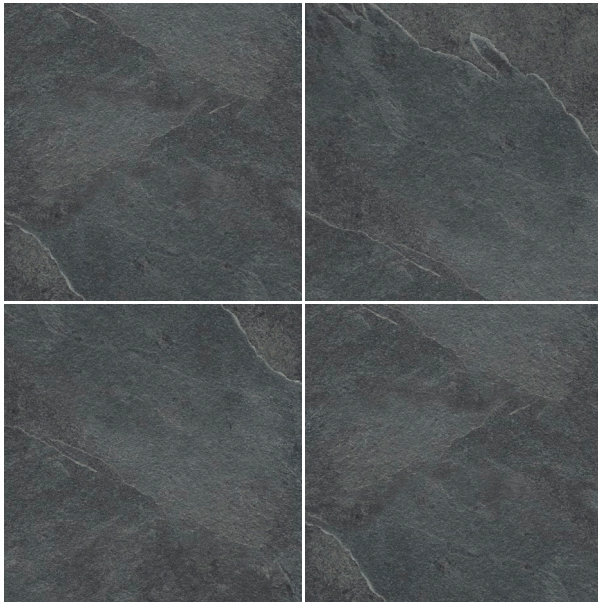

ARDOISE NERO
V3

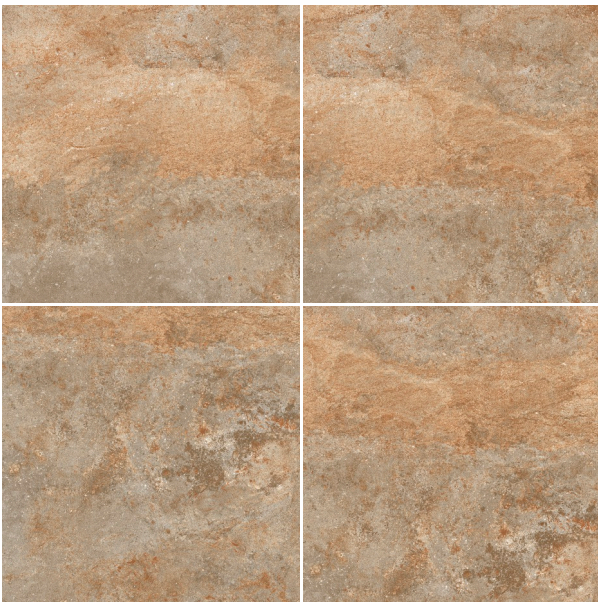


AVANA BROWN
V4



AVANA NATURAL
V4



CASINO BLUE
V1

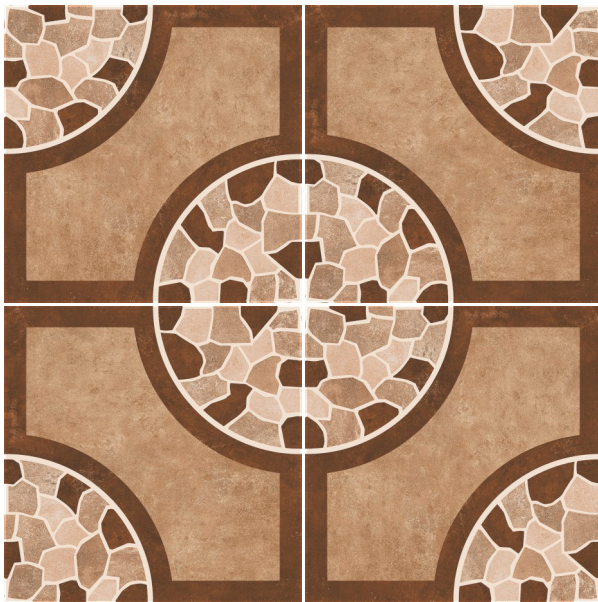

CASINO BROWN
V1



ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm



DURASTONE
HEAVY DUTY VITRIFIED TILES



CAJA BEIGE
V4




CAJA BROWN
V1




CASSIS DECOR
V1




CASSIS GREY
V1

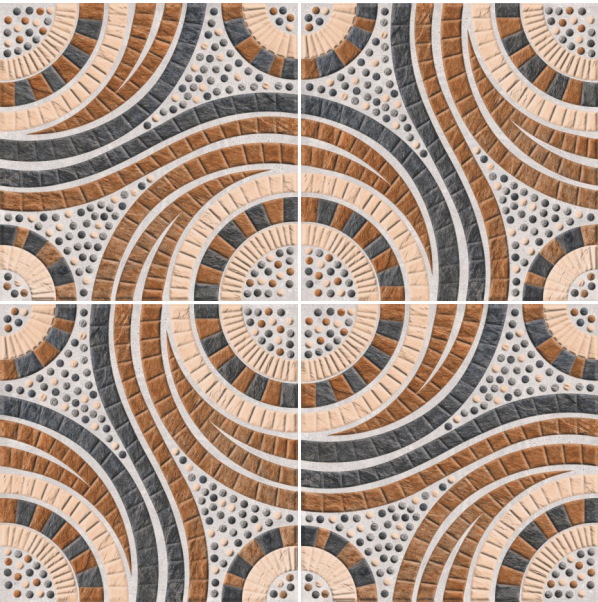


CIAZ BROWN
V1

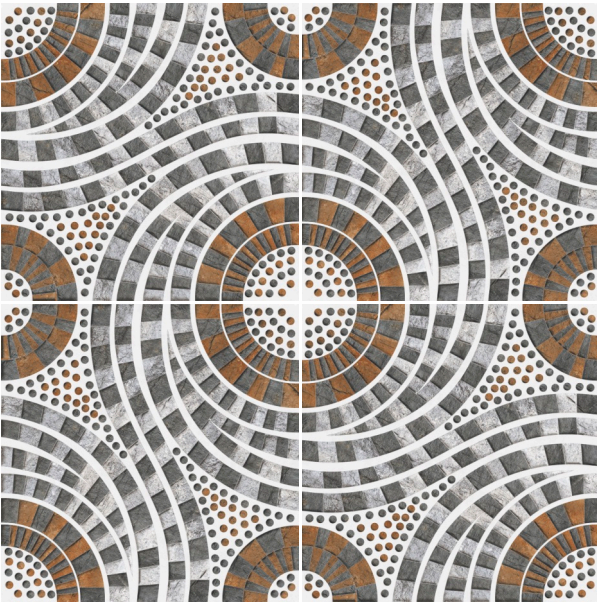

CIAZ GREY
V1

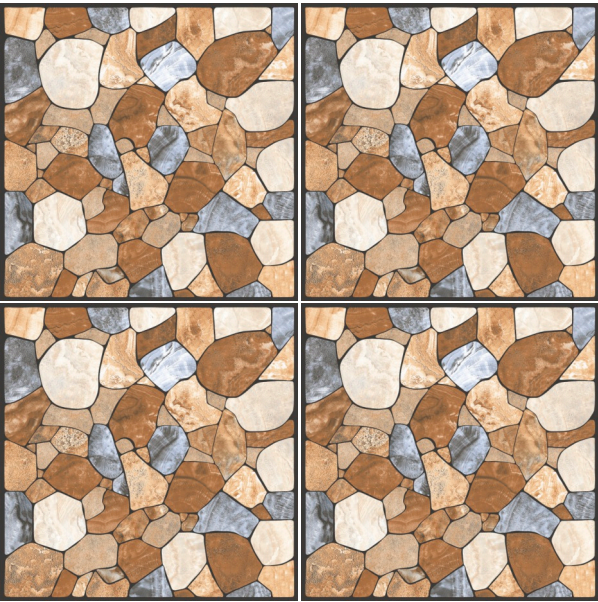

CRAG BLUE
V1

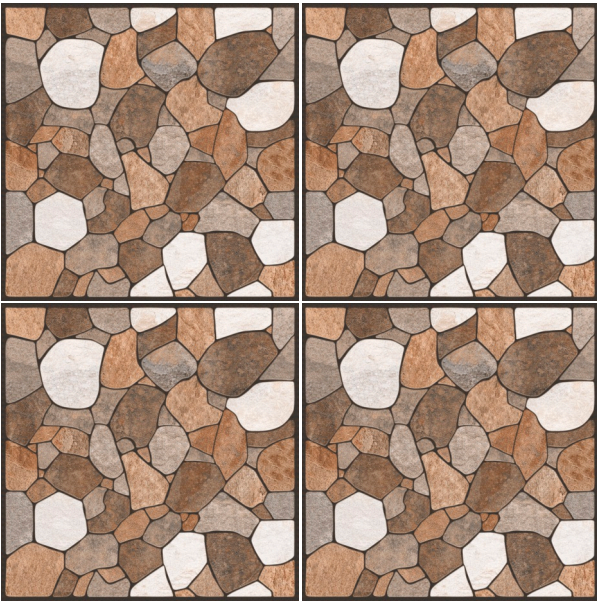

CRAG BROWN
V1





DURASTONE
HEAVY DUTY VITRIFIED TILES


DRESDE GREY & GRIS

ULTRA STRONG
OUTDOOR VITRIFIED TILES


400x
400mm



DURASTONE
HEAVY DUTY VITRIFIED TILES

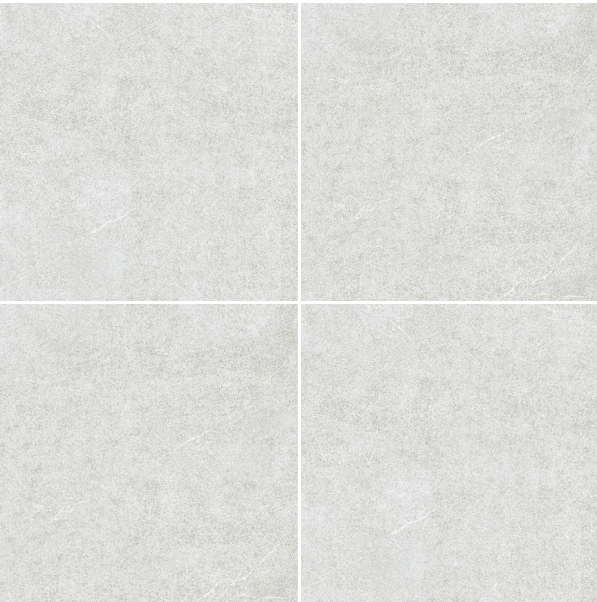

DRESDE GREY
V2

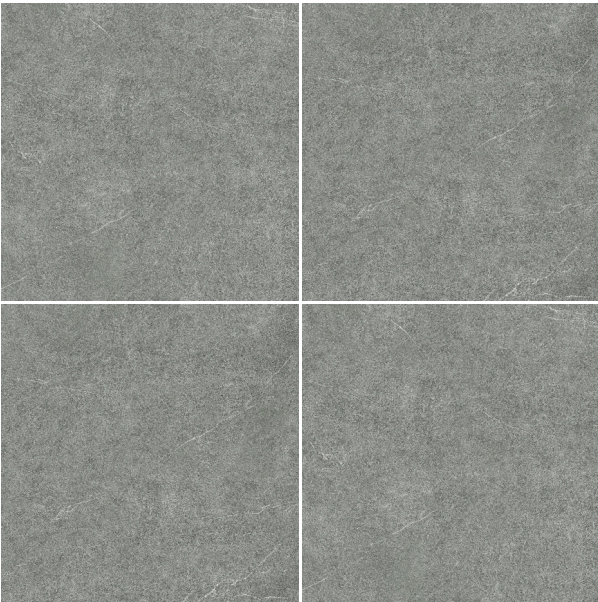

DRESDE GRIS
V2



ESTUCO COTTO
V1



ESTUCO COTTO DECORE
V1




ESTUCO BEIGE
V1



ESTUCO BEIGE DECORE
V1




ETNICO NATURAL
V1

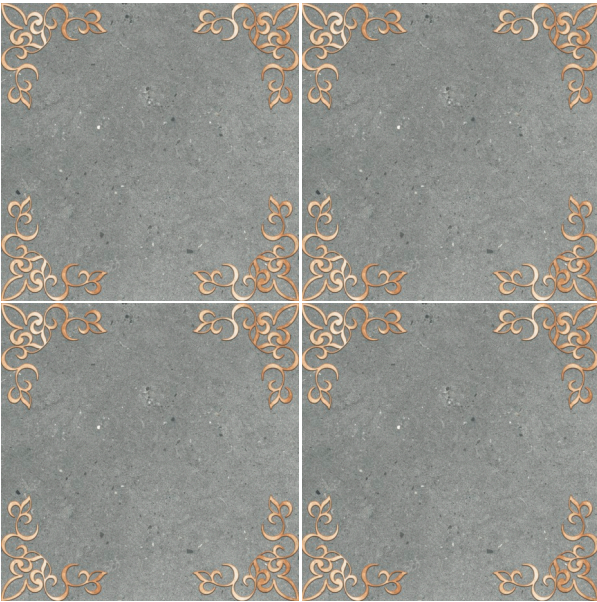

ETNICO NERO
V1




ULTRA STRONG
OUTDOOR VITRIFIED TILES



- Anti Skid
- High Flexural Strength
- Wear Resistance
- Fire Resistance
- Frost Resistance
- Chromatic Properties
- Eco Friendly & Recyclable
- Chemical Resistance


DURASTONE
HEAVY DUTY VITRIFIED TILES

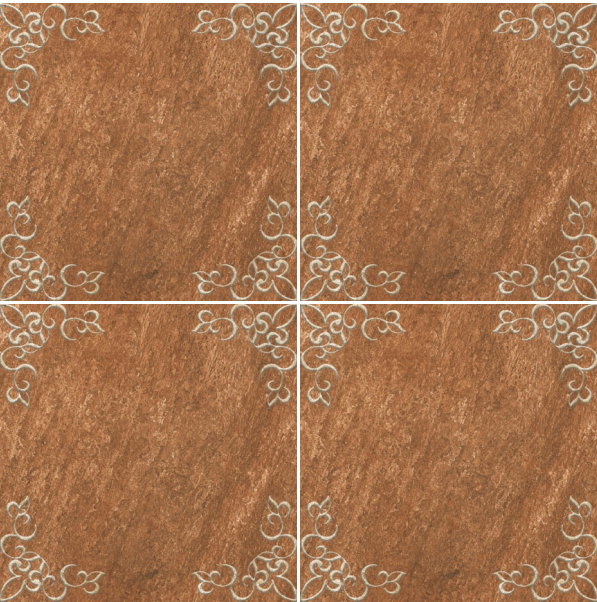


ETNICO BROWN
V1




ETNICO GREY
V1

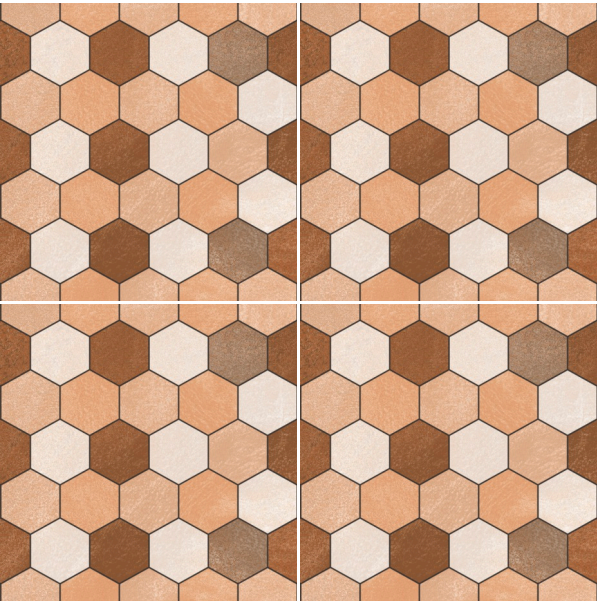

HEXON BROWN
V1

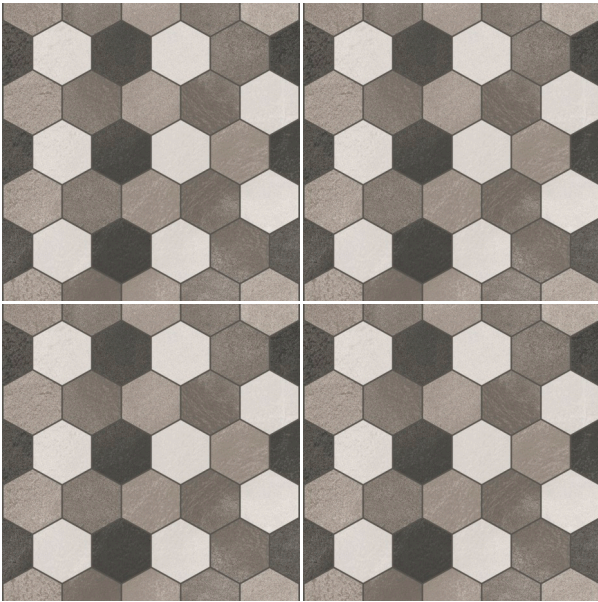

HEXON GREY
V1

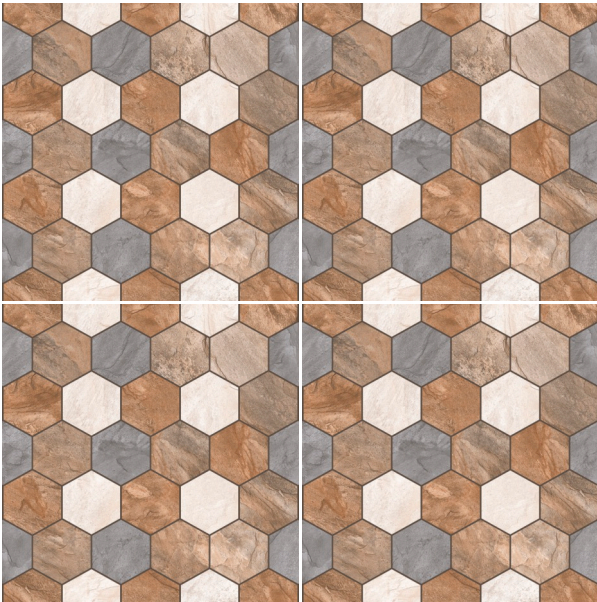

HEXON MULTI
V1



HOLZ GREY
V1



HOLZ BEIGE
V1



HOLZ COTTO
V1





DURASTONE
HEAVY DUTY VITRIFIED TILES

LEVANTE COTTO

ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm



Anti
Skid



High Flexural
Strength



Wear
Resistance



Fire
Resistance



Frost
Resistance



Chromatic
Properties




Eco Friendly &
Recyclable




Chemical
Resistance

DURASTONE
HEAVY DUTY VITRIFIED TILES

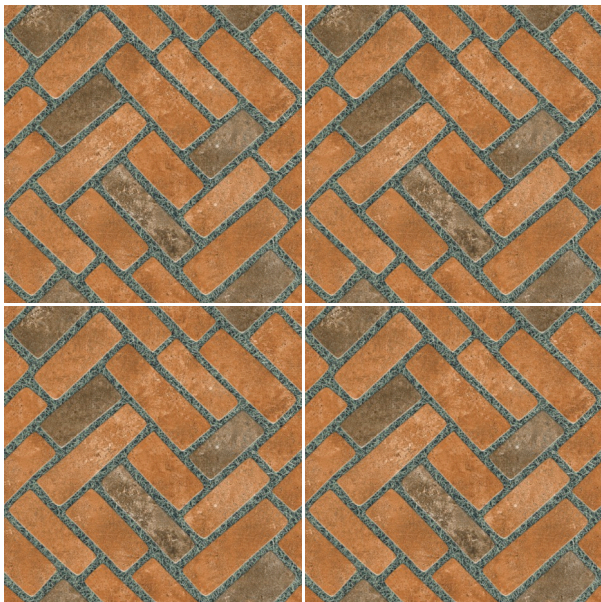

KANSAS COTTO
V1

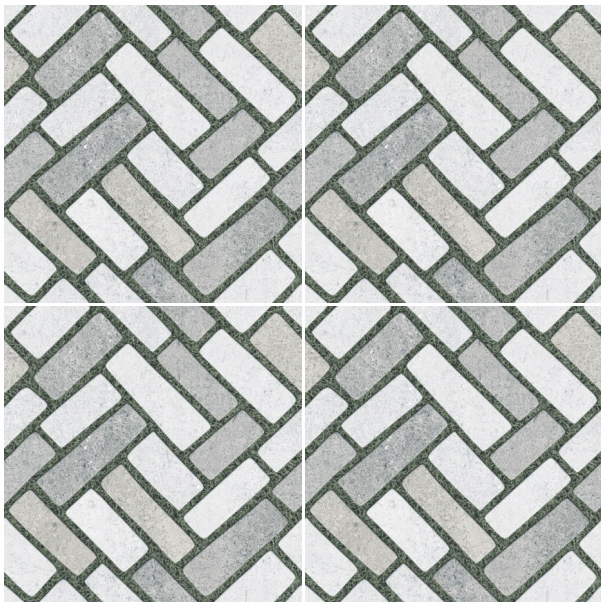


KANSAS GREY
V1



KAPPA COTTO
V1



KAPPA GREY NATURAL
V1

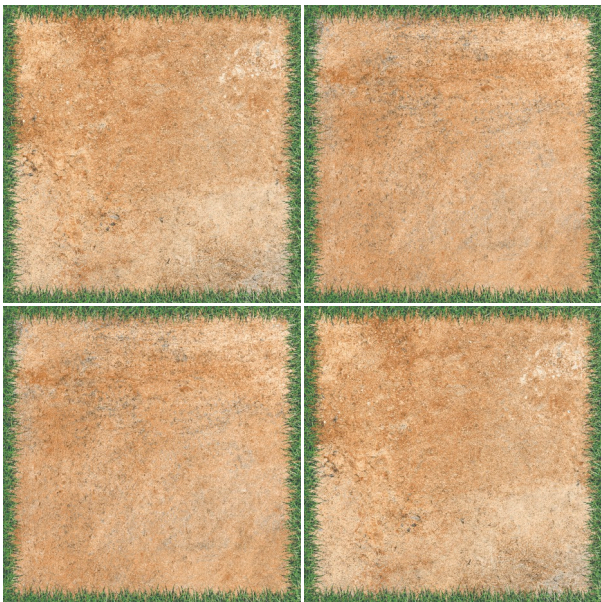

LEVANTE COTTO
V2



MACRO STONE
V3





MATTONE DARK GREY
V1




MATTONE LIGHT GREY
V1




ULTRA STRONG
OUTDOOR VITRIFIED TILES

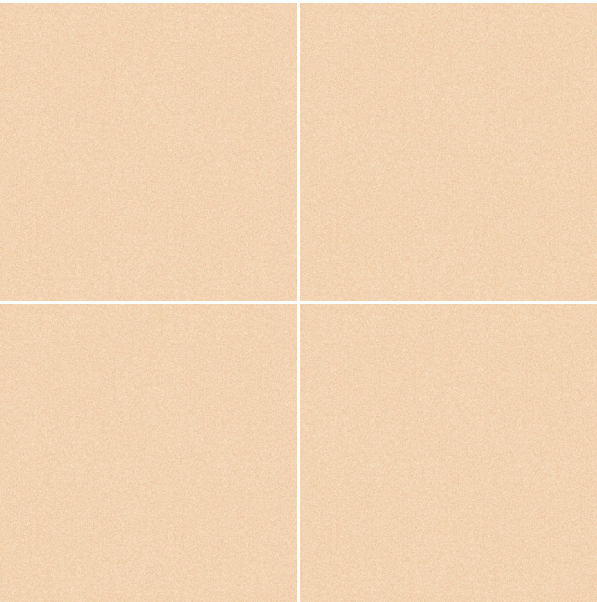


POLARIS BEIGE
V1

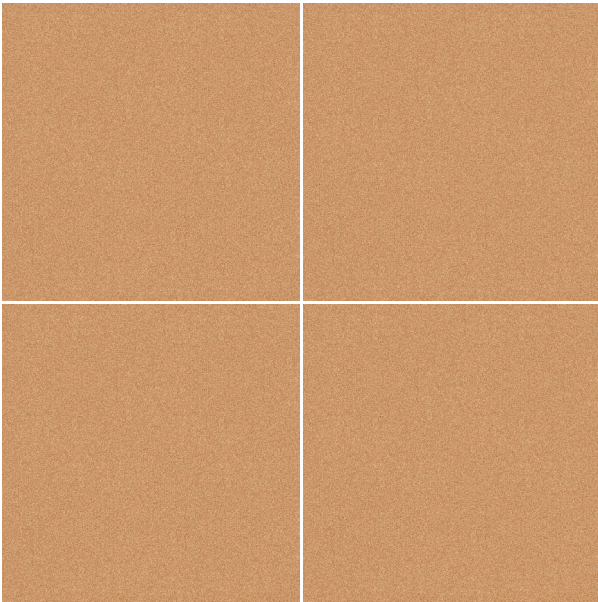


POLARIS BROWN
V1

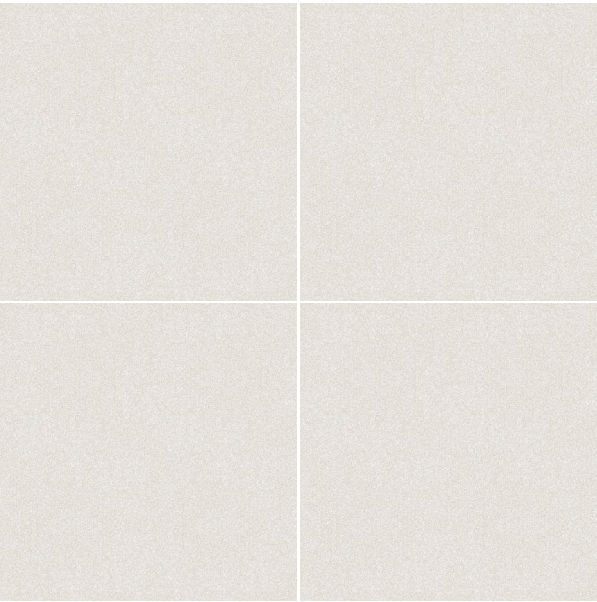


POLARIS GREY
V1

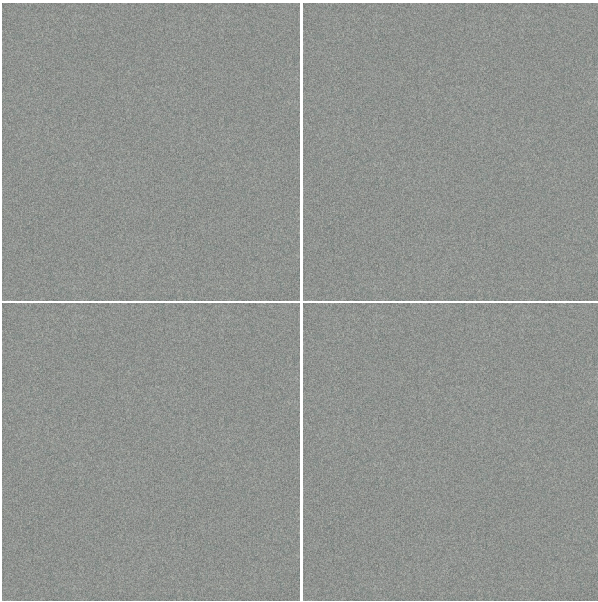

POLARIS GRIS
V1

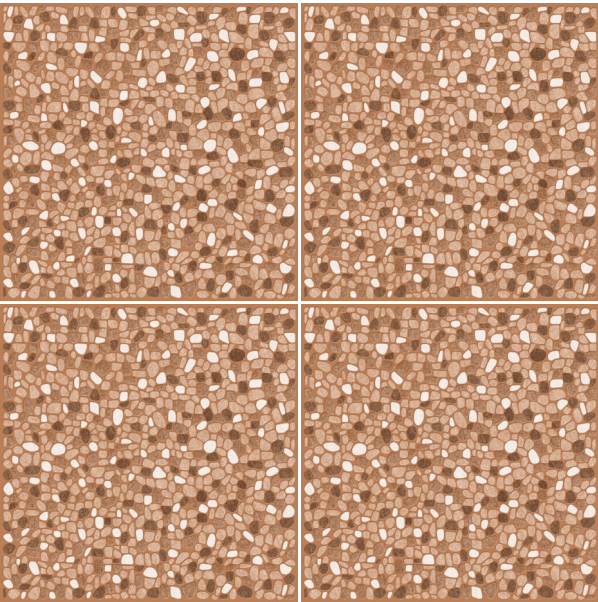

PIERRE BROWN
V1

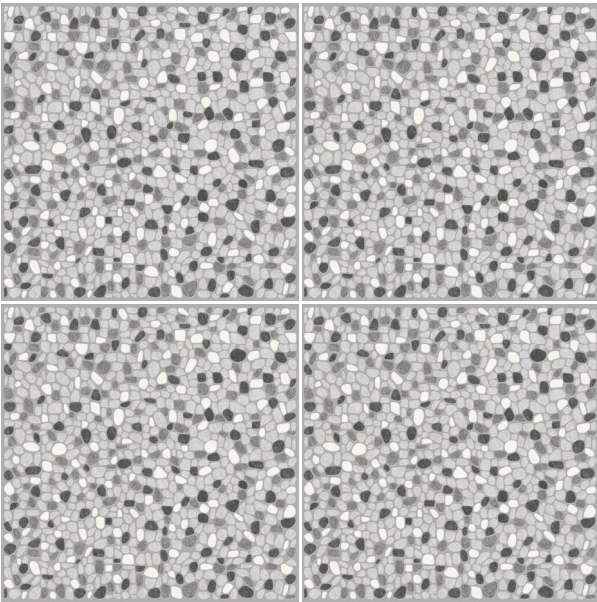

PIERRE GREY
V1



ROBIN BROWN
V1



ROBIN DECOR
V1





DURASTONE
HEAVY DUTY VITRIFIED TILES


PODERO GRIS & DECORE

ULTRA STRONG
OUTDOOR VITRIFIED TILES


400x
400mm




DURASTONE
HEAVY DUTY VITRIFIED TILES

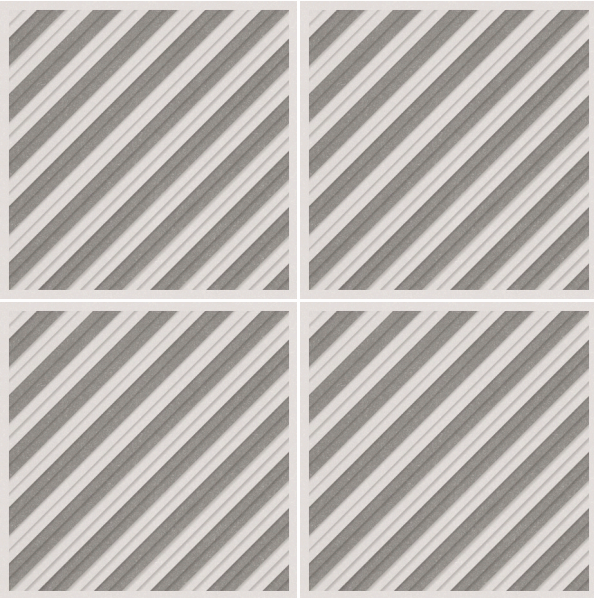

PODERO GRIS DECORE
V1

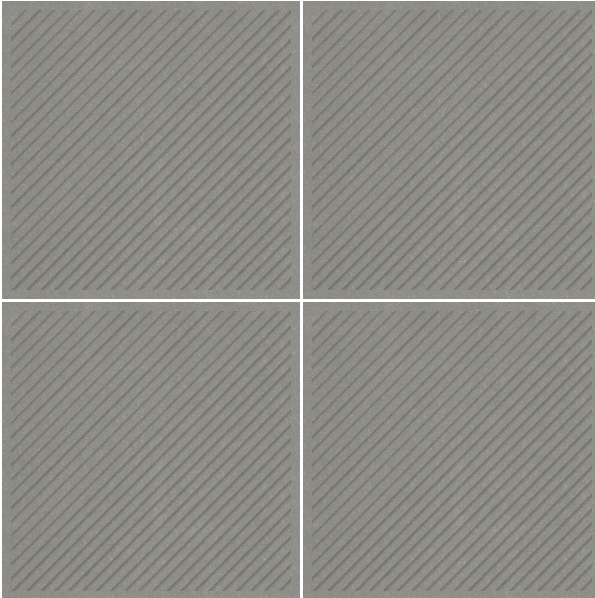


PODERO GRIS
V1

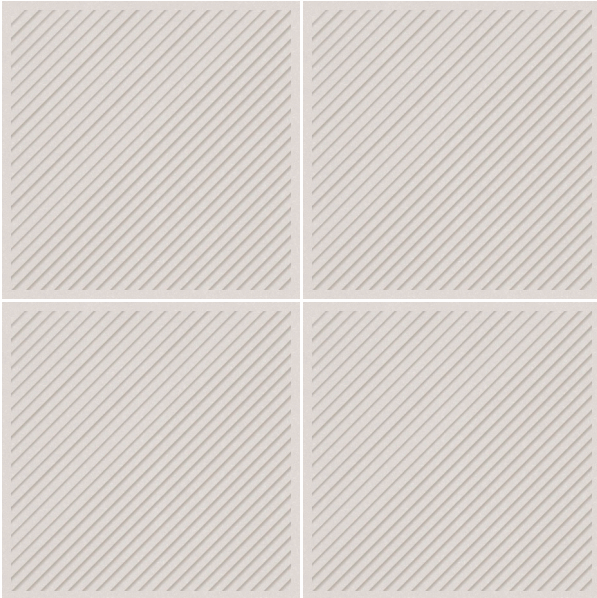


PODERO GREY
V1




SPARTA GREY
V1

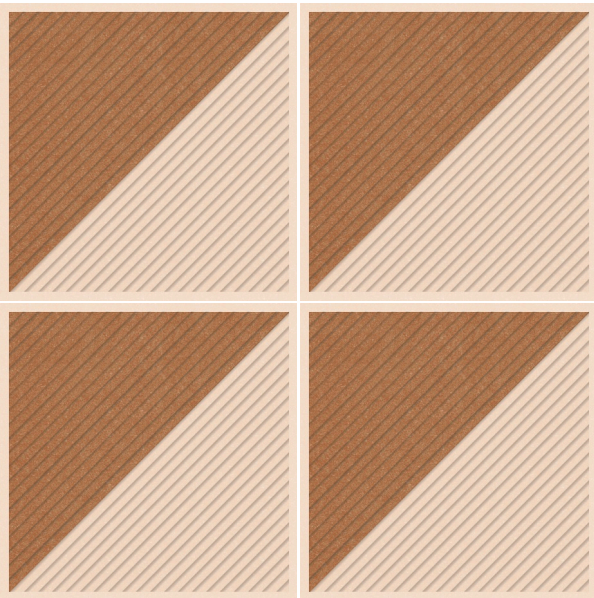

PODERO BROWN DECORE
V1

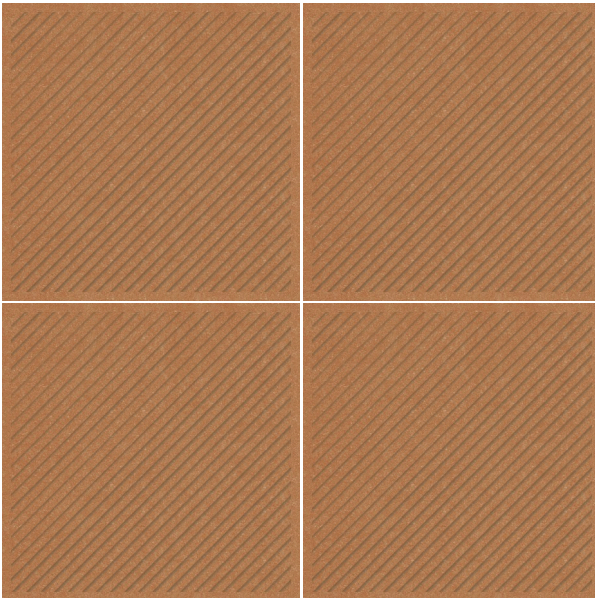

PODERO BROWN
V1

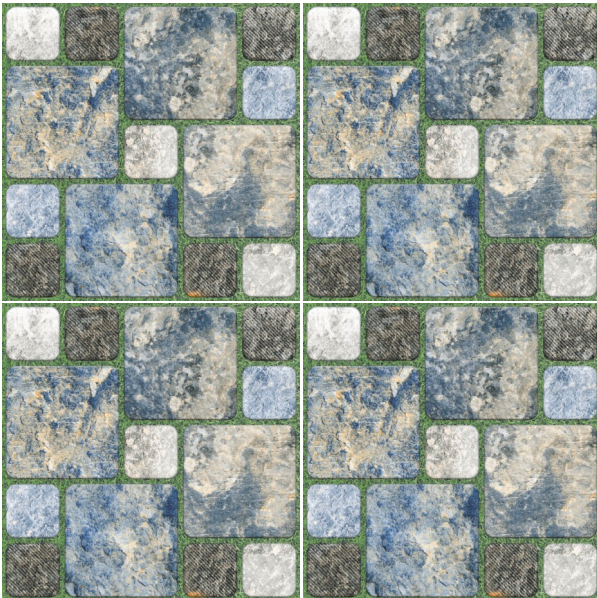

SPARTA BLUE
V1



SPARTA BROWN
V1





DURASTONE
HEAVY DUTY VITRIFIED TILES


TARRACO BEIGE

ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm




DURASTONE
HEAVY DUTY VITRIFIED TILES

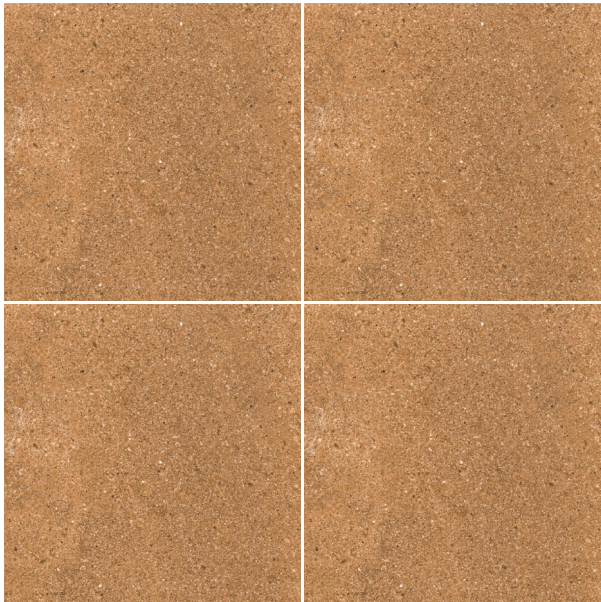


SANFORD BROWN
V1




SANFORD DECOR
V1

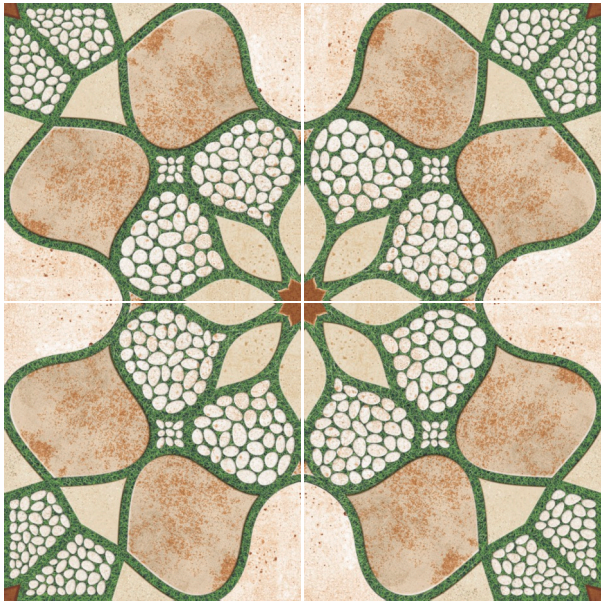


TARRACO BEIGE
V1

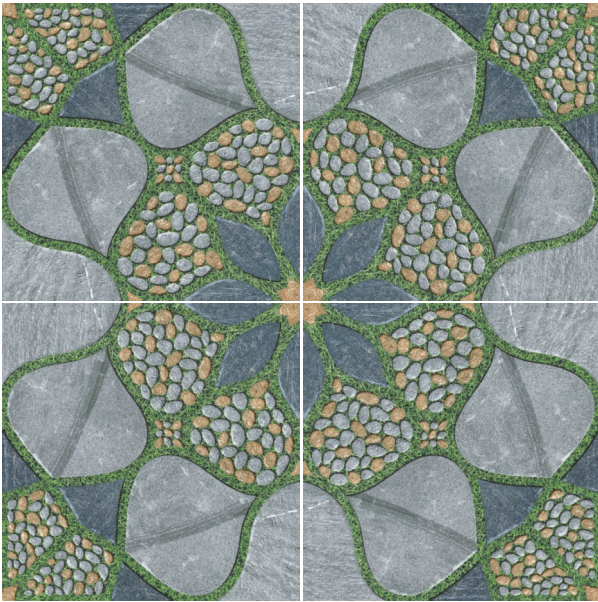


TARRACO GRIS
V1

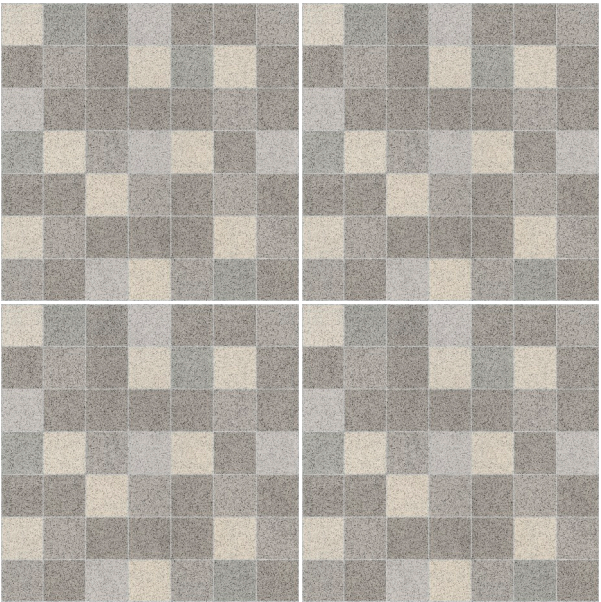

TIERRA NERO DÉCOR
V1

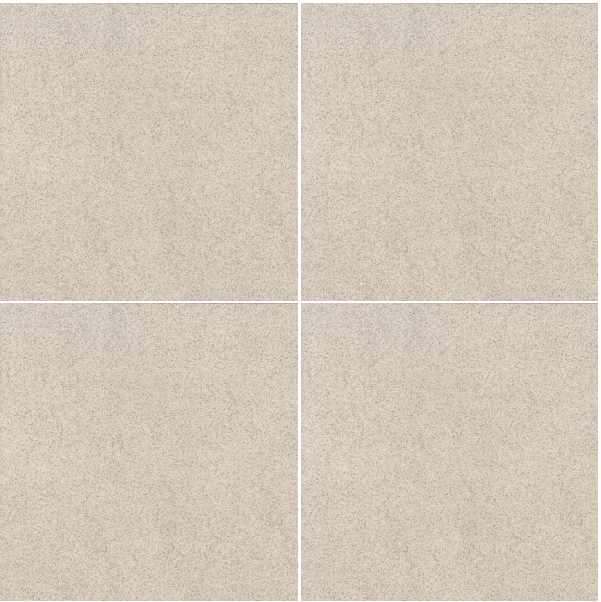

TIERRA BIANCO
V1

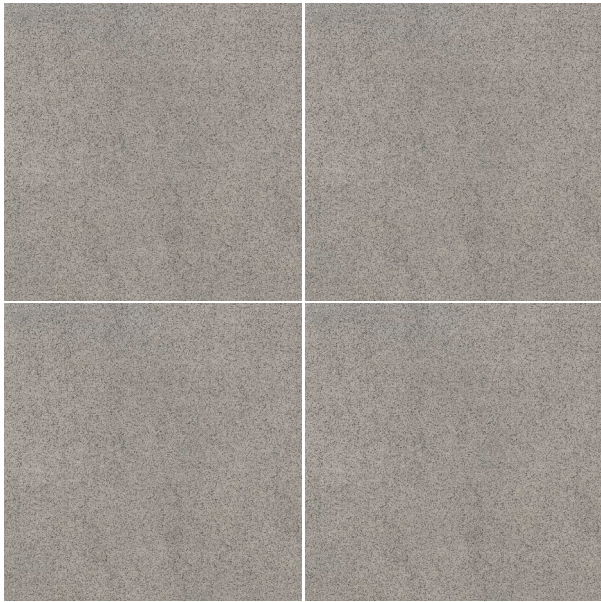

TIERRA NERO
V1






DURASTONE
HEAVY DUTY VITRIFIED TILES

VERIN BEIGE

ULTRA STRONG
OUTDOOR VITRIFIED TILES



Anti Skid



High Flexural Strength



Wear Resistance



Fire Resistance



Frost Resistance




Chromatic Properties




Eco Friendly & Recyclable




Chemical Resistance

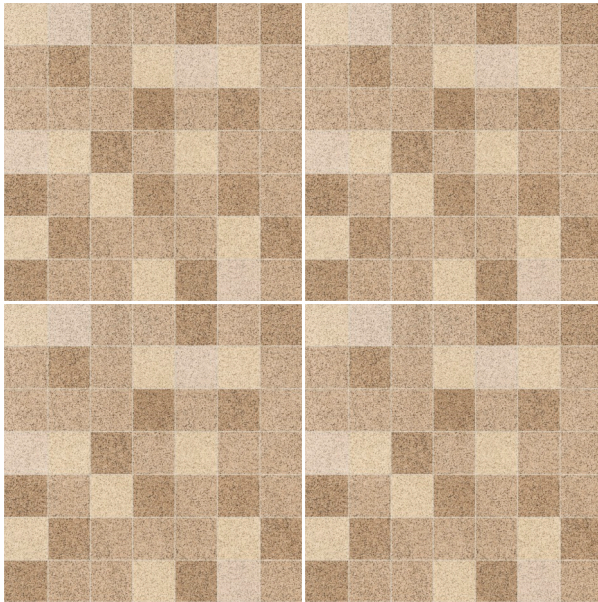


TIERRA BROWN DÉCOR
V1

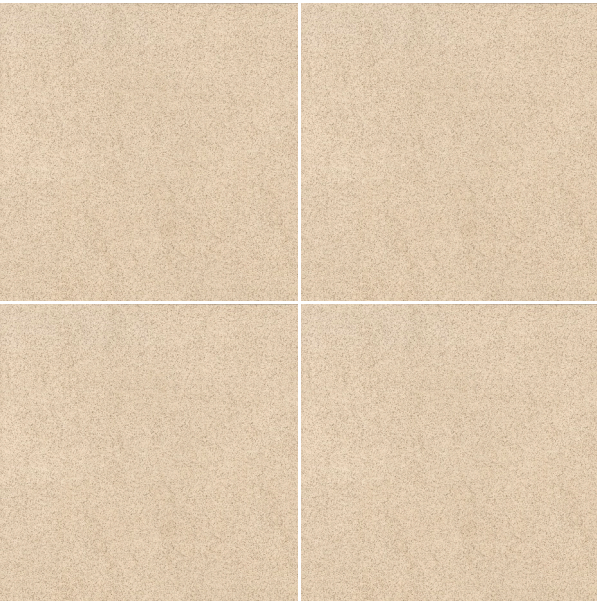


TIERRA IVORY
V1

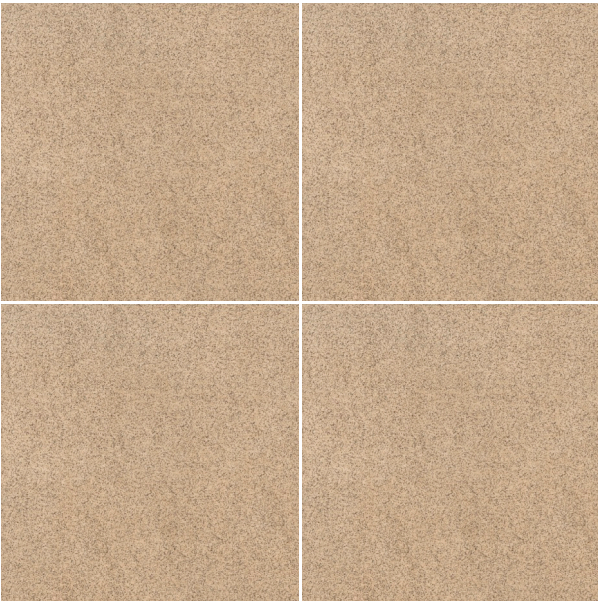

TIERRA BROWN
V1

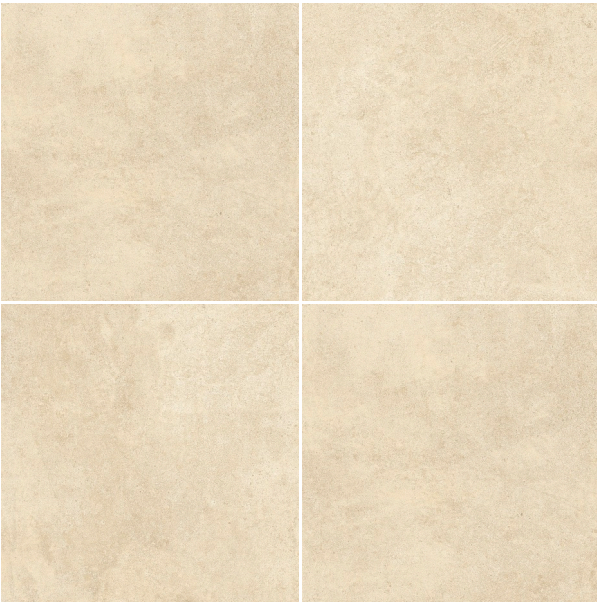


VERIN BEIGE
V3

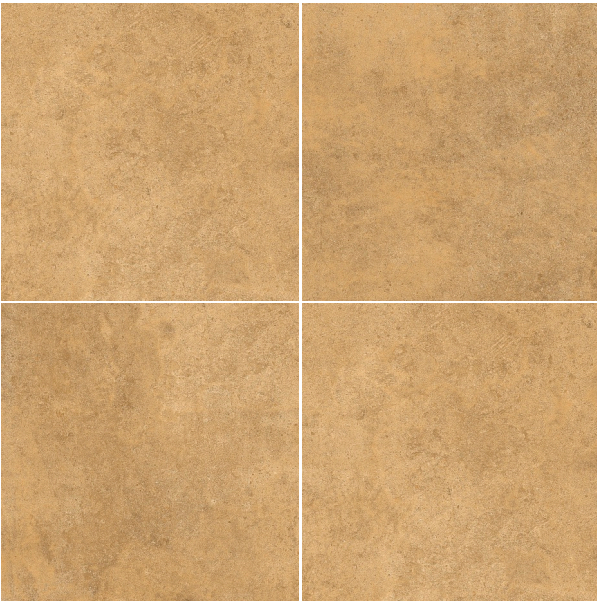

VERIN BROWN
V3







DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.


Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.




V1 Uniform Appearance



V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation

The classification is as follow:

V1 Minimal Variation V2 Slight Variation V3 Random Variation V4 Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles.
For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder. And use with spacer to look good



Anti Skid



High Flexural Strength



Wear Resistance



Fire Resistance



Frost Resistance



Chromatic Properties



Eco Friendly & Recyclable



Chemical Resistance



PACKAGING DETAIL FOR DURASTONE TILES - 400X400MM				
Nominal Size	Thickness	Avg. Wt. Per Box (Kg.)	No. of Tiles Per Box	Coverage Area Per Box
400x400MM	11.8mm	20.0 kg	5	0.80 sq meter / 8.61sq feet

TECHNICAL SPECIFICATION FOR DURASTONE TILES - 400x400MM				
Characteristics	Requirement as per ISO 13006:2018 ≤ 0.5% Group B I a	Requirement as per IS 15622 :2017 0.08 < E ≤ 3% Group B I b	Our value	Test Method
Dimension & Surface Quality				
Length & Width	± 0.3%	± 0.1%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
Thickness	± 5.0%	± 5.0%	± 4.0%	
Straightness of Side	± 0.30%	± 0.1%	± 0.10%	
Rectangularity	± 0.30%	± 0.1%	± 0.10%	
Surface Flatness				
Center curvature (%) (max.Deviation)	± 0.40%	± 0.5%	± 0.2%	
Edge curvature (%) (max.Deviation)	± 0.40%	± 0.5%	± 0.2%	
Corner warpage %)(max.Deviation)	± 0.40%	± 0.5%	± 0.2%	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	Avg. 0.5 %, Individual 0.6% max	Av. 0.08< E ≤ 3 %, Individual 3.3 max	Av < 0.5 %	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm²]	Av 35, Individual 32 min	Av 30, Individual 27 min	Avg.> 35	IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	Min 1300 N	Min 1100 N	Min 2500 N	
Moisture Expansion in mm/m	Test Method Available	0.02	Max,0.02	IS 13630 Part 3/ISO-10545-10
Scratch Hardness of surface (Mohs)	N/A	Min 5	Min-6	IS 13630 Part 13
Surface Abrasion Resistance	Min Class II	Min II	Min Class IV	IS 13630 Part 13/ISO 10545-Part 7
Coefficient of linear thermal expansion from embiant temperature to 100º C	Test Method Available	Max 7 X 10 ⁻⁶ K ⁻¹ max	Max 6 X 10 ⁻⁶ K ⁻¹ max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistance	Required	10 cycle passed	10 cycle passed	IS 13630 Part 5/ISO-10545-9
Crazing Resistance	N/A	4 cycle @ 7.5bar min	4 cycle passed	IS 13630 Part 9/ISO 10545-11
Imapct Resistance as Co-efficient of Restitution (COR)	Test Method Available	0.55 Min	Min 0.55	IS 13630 Part-14/ISO 10545-5
Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
Chemical Resistance (glazed Tiles)				
Stain Resistance	Min Class 3	Not Available	Min Class 2	IS 13630 Part 8 &ISO 10545-14
Resistance to household chemicals	Minimum B	Test Method Available	Min Class AA	IS 13630 Part 8/ ISO 10545-13
Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Declared Value ^f	Test Method Available	Required if agreed	

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. “ Technical Specification” for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

SOMANY
Bathware

Our PORTFOLIO



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

SOMANY

Ezy Fix
TILE ADHESIVE



HIGH STRENGTH POLYMER MODIFIED TILE ADHESIVE



BENEFITS

- » READY AND EASY TO USE
- » EXCELLENT BONDING WITH ALL SURFACES
- » FAST SETTING
- » SELF-CURING

USES

- » FOR FIXING ALL TYPE OF TILES
- » FOR NEW FLOORING AND RENOVATION
- » CAN BE USED FOR TILE ON TILE