

DURAGRES

A2PIRE

— COLLECTION —

600x1200mm
GLAZED VITRIFIED TILES



SOMANY

SOMANY
TILES | BATHWARE

Somany Ceramics Limited

Corporate Office: F-35, Sector-6, Noida-201501, Uttar Pradesh, Ph: 0120-4627900

Ahmedabad Office: 601 to 606, 6th Floor, Aaple Euphoria, Opp. Adani CHQ Pump, B/V. Geta Flyover,

S.G. Highway, Ahmedabad-382481, Ph: 079-2766103 & 04

Registered Office: 2, Red Cross Place, Kolkata-700001, Ph: 033-22467406/5511

www.somanyceramics.com | e-mail: customer.care@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00 am to 6:30 pm; Mon-Fri)

UNIT-4 | A2PIRE / CAT / MAY 2025

A2PIRE

— COLLECTION —

Experience the allure of timeless elegance with our ASPIRE Collection of GVT tiles, available in a 600x1200mm size. Elevate your spaces with sophisticated designs and unparalleled quality, adding a touch of luxurious charm to every room. Effortlessly transform your interiors with the enduring beauty and lasting durability of ASPIRE's exquisite surfaces.



INDEX

600x
1200mm



A2PIRE[®]

COLLECTION

Innovative Surfaces for inspired spaces



TECHNICAL FEATURES



SUPERIOR GLOSS SURFACE

A stunning, high-gloss finish that elevates any space. The reflective surface amplifies light, creating a brighter and more luxurious ambience.



ABRASION RESISTANT FOR MODERATE TO HIGH TRAFFIC AREAS

Our tiles are designed to withstand the test of time, even in high-traffic areas. Their superior abrasion resistance of PEI-4 ensures durability and maintains their pristine appearance for years.



EASY TO CLEAN

They are easy to clean and maintain, thanks to their non-porous surface that resists dirt and stains.



REFLECTIVE GLOSS INDEX <8

Our tiles feature a subtle, low-reflection finish, reducing glare and creating a more comfortable visual experience. This makes them ideal for various settings, including spaces with significant natural light.



Water Repellent



Blended Smoothness



Non-Reflective



Thermal Resistant



Frost Resistant



Chemical Resistant



Abrasion and Wear Resistant



Temperature Resistant



Hygienic and Safe



Load and Stress Resistant

APPLICATION AREAS



Residential Areas



Commercial Areas



Hospitals



Public Places



Shops And Malls



Hotels and Restaurants



Schools and Colleges




Outdoor Furniture



ASPIRE LUCIDO ALLEGRA TEAL HG

V4

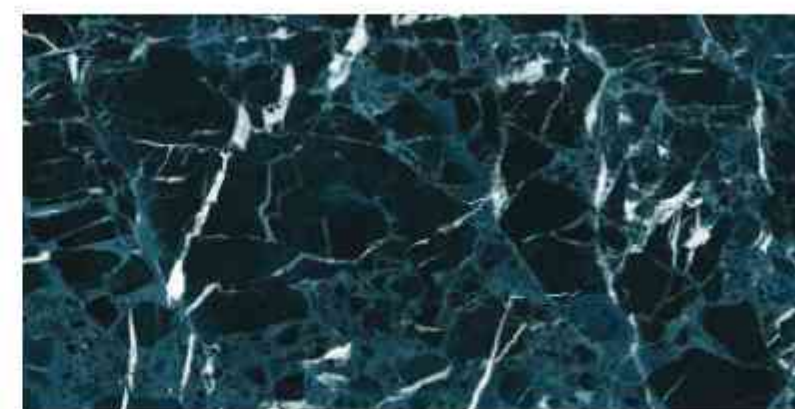

ASPIRE LUCIDO LEVANTO TEAL HG

V4



ASPIRE LUCIDO EMPERADOR BROWN HG

V4



ASPIRE LUCIDO MYSTIQUE NERO HG

V4



ASPIRE LUCIDO FOSSIL BLACK HG

V4



ASPIRE LUCIDO PULPIS BRONZE HG

V4



FLOOR ASPIRE LUCIDO ALLEGRA TEAL HG
SURFACE HIGH GLOSS

Size:
600x1200mm

Surface:
FULL POLISHED ENDLESS

GLAZED VITRIFIED TILES

5 mm TILE SPACERS
RECOMMENDATION

A2PIRE



ASPIRE EL DIVINITY ASH FP

V3



ASPIRE EL LASA BEIGE FP

V4



ASPIRE EL GRAO MULTI FP

V3



ASPIRE EL ORO BELLO FP

V2



ASPIRE EL SOLARIS CREMA FP

V3



ASPIRE EL VYOMA BIANCO FP

V3



FLOOR, ASPIRE EL LISA BEIGE FP
SURFACE, FULL POLISHED ENDLESS

Size:
600x1200mm

Surface:
FULL POLISHED ENDLESS

GLAZED VITRIFIED TILES



ASPIRE EL LEGACY STATUARIO FP

V2



ASPIRE EL GRACIA GREY FP

V3



ASPIRE EL ROMERO CREMA FP

V3



FLOOR: ASPIRE EL LEGACY STATUARIO FP
ASPIRE TENDER DARK GREY FP | SURFACE: FULL POLISHED ENDLESS

600x1200mm



ASPIRE ERICA AQUA GOLD FP

V2



ASPIRE FLOREALE BEIGE FP

V3



ASPIRE FLOREALE LIGHT BLUE FP

V3



ASPIRE FLOREALE BEIGE DECOR FP

V1



ASPIRE FLOREALE DARK BLUE FP


V3



ASPIRE FLOREALE BROWN FP

V3



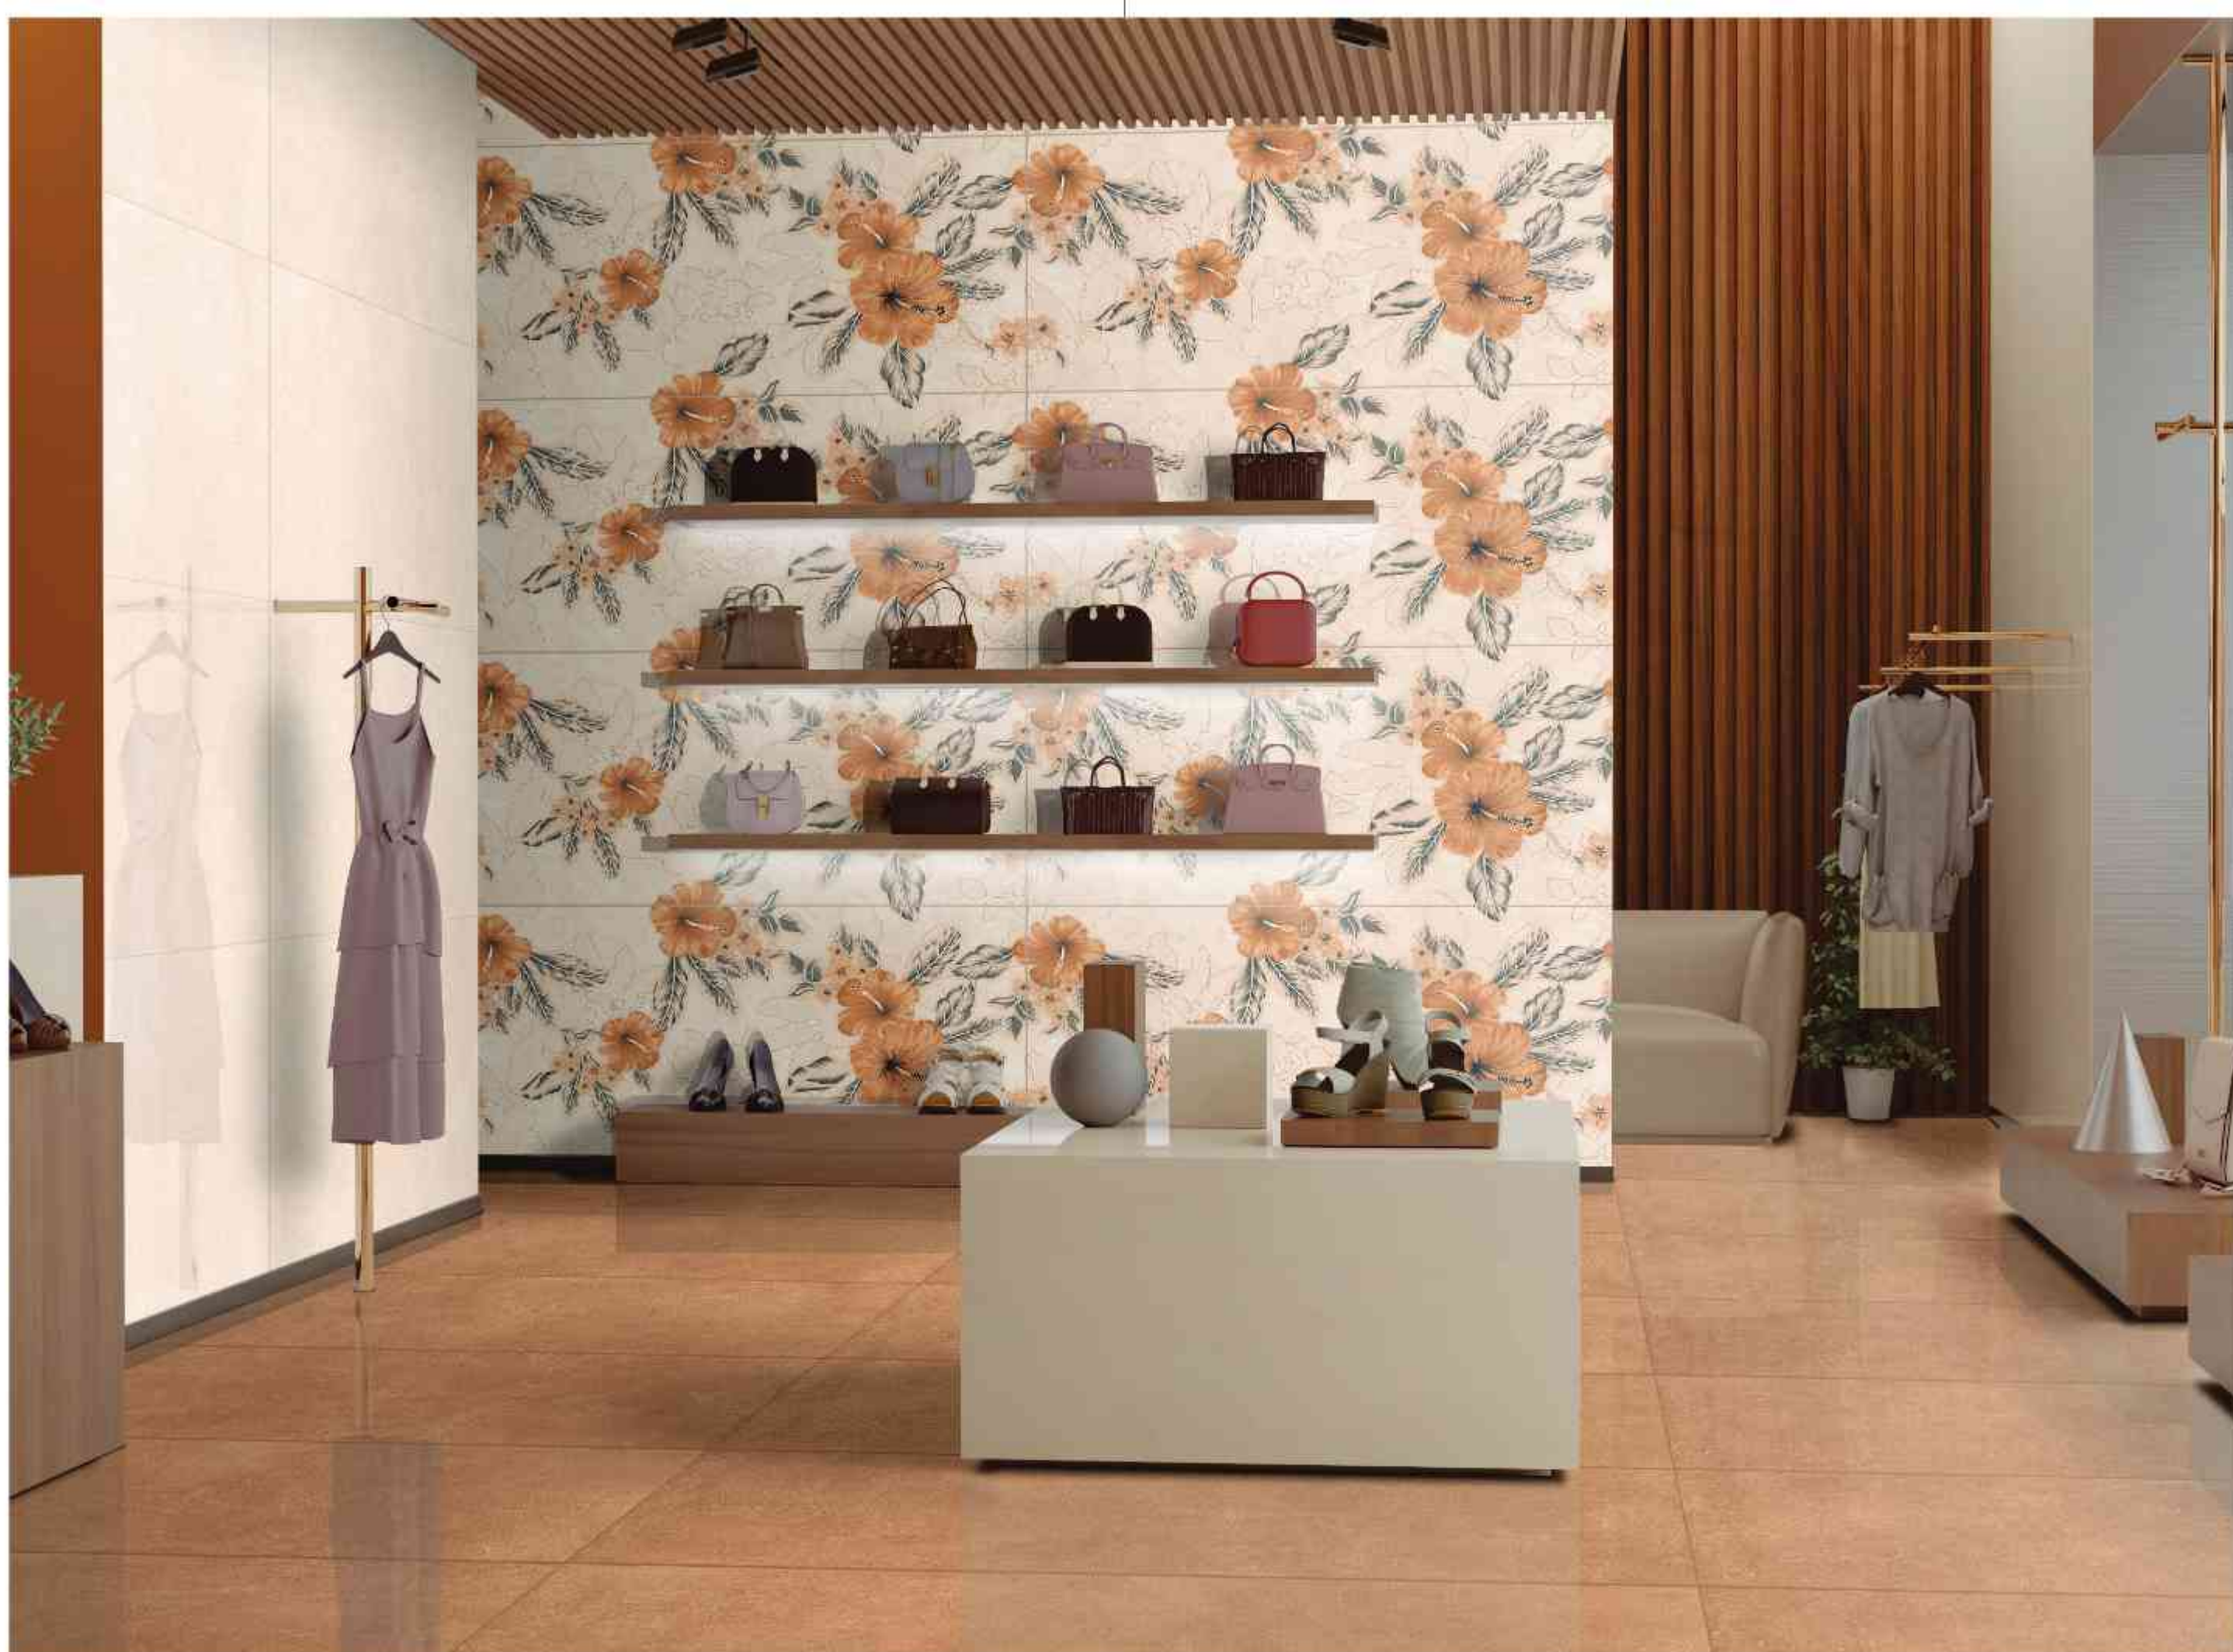

WALL & FLOOR: ASPIRE FLOREALE BEIGE FP | ASPIRE FLOREALE BEIGE DECOR FP | ASPIRE FLOREALE BROWN FP
SURFACE: FULL POLISHED



ASPIRE CAMUS LIGHT GREY FP

V3



ASPIRE FLOS OYSTER FP

V3



ASPIRE CAMUS DARK GREY FP

V3



ASPIRE FLOS LIGHT GREY FP

V3



ASPIRE CANCUN CREMA FP

V2



ASPIRE FLOS DARK GREY FP

V3





ASPIRE IRISH BROWN FP

V2



ASPIRE MYSTIQUE WHITE FP

V4



ASPIRE NATIVA PINK FP

V4



ASPIRE STATUARIO SELECT FP

V4



ASPIRE VEGAS GOLD FP

V3



Size:
600x1200mm

Surface:
FULL POLISHED

GLAZED VITRIFIED TILES



ASPIRE TENDER LIGHT GREY FP

V3



ASPIRE TENDER GREY DECOR FP

V1



ASPIRE TENDER DARK GREY FP

V3



WALL & FLOOR ASPIRE TENDER LIGHT GREY FP | ASPIRE TENDER GREY DECOR FP
ASPIRE TENDER DARK GREY FP | SURFACE FULL POLISHED

600x1200mm

Size:
600x1200mm


Surface:
MATT

GLAZED VITRIFIED TILES




ASPIRE FLOREALE BROWN

V3

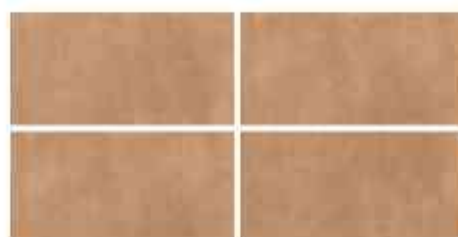

ASPIRE FLOREALE DARK BLUE

V3

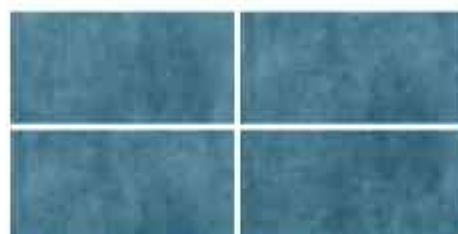

ASPIRE TENDER DARK GREY

V3



FLOOR: ASPIRE FLOREALE BROWN
ASPIRE TENDER DARK GREY FP | SURFACE: MATT



ASPIRE IMP ASTORE MUSHROOM

V3



ASPIRE IMP IMARMİ ONYX

V4



ASPIRE IMP CORAS STATUARIO

V4



ASPIRE IMP IRISH CREMA

V2



ASPIRE IMP CINEREA CARARA

V4



ASPIRE IMP SOLITARY BEIGE

V4




WALL & FLOOR: ASPIRE IMP. MARMI ONYX | ASPIRE IMP. SOLITARY BEIGE
SURFACE: IMPRESSION


DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).


Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.




V1 Minimal Variation



V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation V3 Moderate Variation V4 Substantial Variation

PACKAGING DETAIL FOR 600X1200MM GLAZED VITRIFIED TILES				
Nominal Size(mm)	Thickness(mm)	Avg. weight per carton(Kgs)	No. of tiles per carton	Coverage area per carton
600x1200mm	8 mm	24.5 kgs	2	1.44 Square Meter / 15.50 Square Feet

TECHNICAL SPECIFICATION FOR 600X1200MM GLAZED VITRIFIED TILES				
Characteristics	Requirement as per IS 15622:2017 E ≤ 0.08 Group B 1 a	Requirement as per ISO 13006:2018 E≤ 0.05-Group B 1 a (Annex G)	Our Values	Test Method
A) Dimension & Surface Quality				
i) Length & Width		± 0.10%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 0.0%	± 0.30%	± 0.10%	
iii) Straightness of Side	± 0.10%	± 0.30%	± 0.10%	
iv) Rectangularity	± 0.10%	± 0.30%	± 0.10%	
v) Surface Flatness				
a) Center curvature (%) (max.Deviation)	± 0.5%	± 0.4%	± 0.02%	
b) Edge curvature (%) (max.Deviation)	± 0.5%	± 0.4%	± 0.02%	
c) Corner warpage (%) (max.Deviation)	± 0.5%	± 0.4%	± 0.02%	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Average 0.5<E, Individual Max 0.1%	E≤ 0.5, Individual max 0.6%	Av 0.08 %	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture (N/mm2)	Avg. 35, Individual 32 min	Avg 35, Individual 32 min	Avg-38	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1300	1300	Min 1400	
iv) Moisture Expansion in mm/m	0.02	Test Method Available	0.02 Max	IS 13630 Part 3/ISO-10545-10
v) Scratch Hardness of surface (Mohs)	Min 5	N/A	4-6 (depends on surface)	IS 13630 Part 13
vi) Resistant to Abrasion of Glazed Tiles (Class I to V)	Min II	Report abrasion class and cycles passed	Class V (for VC), Class IV (for Non VC), Class III (For polished)	IS 13630 Part 11 /ISO 10545-7
vii) Coefficient of linear thermal expansion from ambient temperature to 105°C	6 X 10 ⁻⁶ K ⁻¹ max	Test Method Available	Max 5.5 X 10 ⁻⁶ K ⁻¹	IS 13630 Part 4/ ISO 10545-8
viii) Thermal Resistant	10 cycle min	Test Method Available	Passed 10 cycle	IS 13630 Part 5/ISO-10545-9
ix) - Crazing Resistant	4 cycle @ 7.5bar min	Required	Passed 4 cycle	IS 13630 Part 8/ISO 10545-11
x) Impact Resistant as Coefficient of Restitution (COR)	0.55 Min	Test Method Available	0.75-0.90	IS 13630 part 14/ISO 10545-5
xi) Bulk Density (gm/cc)	2.2	N/A	2.25	IS 13630 Part 2
xii) Coefficient of Friction	Where required manufacturer to declare value	Where required manufacturer to declare value	Depends upon Glazed surface	ISO 10545-17
xiii) Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistant (Glazed Tiles)				
i) Stain Resistant	Min Class 1	Min Class 3	Min Class-1/ Class-3	IS 13630 Part 8 & ISO 10545-14
ii) Resistant to household chemicals	Min Class AA	Min, Class B	Min Class AA	
iii) Resistant to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Manufacturer is to state classification	Min Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate hues. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium quality sanitary wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlights, or motifs will not be entertained after purchase.

SOMANY[®] Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!

Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces — walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.



For detailed instructions
scan the QR code

SOMANY[®] Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome

Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used : Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorado Bianco 180 Grit



EASY TO USE



HIGH STRENGTH
POLYMER FORTIFIED
ADHESIVE



WIDE APPLICATION
RANGE



HIGHLY
FLEXIBLE



SUITABLE FOR
WET WALL
SURFACES



SELF - CURING
ADHESIVE



SUITABLE FOR
TILE ON TILE
APPLICATION



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

Toll Free: 1800-103-0004 | www.somanyceramics.com