
DURAGRES

EVERSTONE
collection

1200x1800mm | 800x1600mm | 600x1200mm

9mm thickness

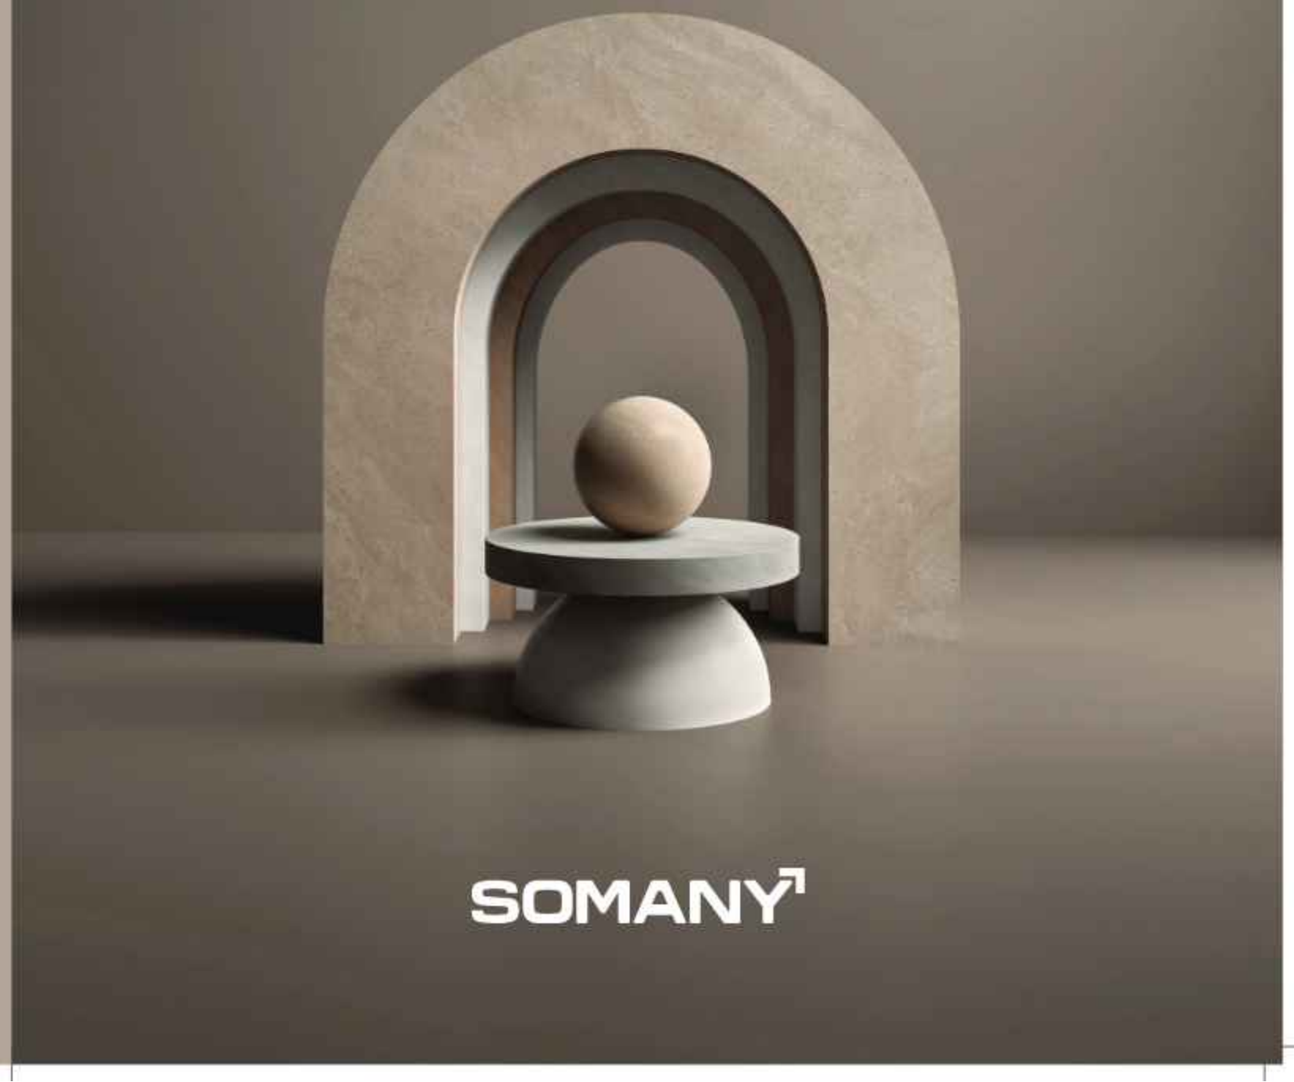

SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

UNIT-4 / EVERSTONE / CAT / MAY 2025

SOMANY


GLOWING IN EARTHY HUE,
WHISPERING TALES OF
ROCK AND SAND

EVERSTONE
collection

The power of stone, the grace of artistry

The Everstone Collection is a testament to the artistry of natural stone replication, meticulously crafted to evoke the raw, organic beauty of quarried rock. Its precision-engineered surface seamlessly blends the intricate textures and tonal variations of genuine stone, enriched by a delicately textured matte finish with a subtle sheen that enhances depth and dimension.

Developed for exceptional durability, Everstone is composed of high-density ceramic, ensuring superior resistance to scratches, stains, and moisture absorption. This makes it an ideal choice for high-traffic commercial and residential spaces, where longevity and aesthetic integrity are paramount.

Its low porosity and advanced surface treatment create a protective barrier against dirt accumulation, making it remarkably easy to clean and maintain. Additionally, its enhanced slip resistance makes it well-suited for outdoor installations, wet areas, and high-humidity environments, providing both safety and style.

1 Design · 1 Surface · 3 Sizes · 4 Shades

VERMION CREMA


VERMION BEIGE


VERMION GREY

VERMION GREY LIGHT


Actual Size Image

Sizes	Surface	Thickness	Variation
1200x1800mm | 800x1600mm | 600x1200mm	Plume	9	V3

TECHNICAL FEATURES

WATER REPELLENT · BLENDED SMOOTHNESS · NON-REFLECTIVE · EASY TO CLEAN · ABRASION & WEAR RESISTANT · HYGIENIC AND SAFE

THERMAL RESISTANT · FROST RESISTANT · LOAD AND STRESS RESISTANT · CHEMICAL RESISTANT · TEMPERATURE RESISTANT



MOH'S SCALE HARDNESS > 5

High density sintering for a robust surface which is a crucial factor to consider when choosing tiles, especially for high-traffic & high-stress areas.



ABRASION RESISTANT FOR MODERATE TO HIGH TRAFFIC AREAS

Our tiles are designed to withstand the test of time, even in high-traffic areas. Their superior abrasion resistant ensures durability and maintains their pristine appearance for years.



SLIP RESISTANT R 10

R 10 slip resistant tiles are a great choice for areas that may get wet. They offer a good balance of slip resistant and aesthetics, making them suitable for both residential and commercial settings.

APPLICATION AREAS

RESIDENTIAL AREAS · COMMERCIAL AREAS · HOSPITALS · SHOPS AND MALLS · HOTELS AND RESTAURANTS · SCHOOLS AND COLLEGES · OUTDOOR FURNITURE · PUBLIC PLACES

EVERSTONE
collection

VERMION
CREMA

VERMION
BEIGE

VERMION
GREY

VERMION
GREY LIGHT




Sizes: **1200x1800mm | 800x1600mm | 600x1200mm** | Thickness: **9mm** | Design: **1** | Shades: **4** | Surface: **Plume**



VERMION CREMA

V3

1200x1800mm - Max 180 Plume Vermion Crema
800x1600mm - Enorme Plume Vermion Crema
600x1200mm - Grande Plume Vermion Crema



Sizes:
1200x1800mm
800x1600mm
600x1200mm

Surface:
Plume

Thickness:
9mm

360 VIEW



WALL: GRANDE PLUME VERMION CREMA | MAX 180 PLUME VERMION BEIGE
SIZES: 600X1200MM | 1200X1800MM | SURFACE: PLUME

9mm Thickness

FLOOR: MAX 180 PLUME VERMION BEIGE | SIZE: 1200X1800MM | SURFACE: PLUME
ITALMARMI TABLE: NECTAR BROWN LUCIDO & NECTAR BROWN OPACO | SIZE: 75X300MM | SURFACE: MATT

WALL MAX 180 PLUME VERMION CREMA | SIZE 1200X1800MM | SURFACE PLUME



FLOOR MAX 180 PLUME VERMION CREMA | SIZE 1200X1800MM | SURFACE PLUME




VERMION BEIGE



V3

1200x1800mm - Max 180 Plume Vermion Beige
800x1600mm - Enorme Plume Vermion Beige
600x1200mm - Grande Plume Vermion Beige



Sizes:
1200x1800mm
800x1600mm
600x1200mm

Surface:
Plume

Thickness:
9mm

360 VIEW



WALL: GRANDE PLUME VERMION CREMA
SIZE: 600X1200MM | SURFACE: PLUME

9mm Thickness


FLOOR: GRANDE PLUME VERMION BEIGE | SIZE: 1200X1800MM | SURFACE: PLUME
ITALMARMI WALL: NECTAR BEIGE LUCIDO & NECTAR BEIGE OPACO | SIZE: 75X300MM | SURFACE: MATT

WALL: **GRANDE PLUME VERMION BEIGE**
SIZE: **600X1200MM** | SURFACE: **PLUME**

FLOOR: **GRANDE PLUME VERMION BEIGE** | SIZE: **600X1200MM** | SURFACE: **PLUME**




VERMION GREY

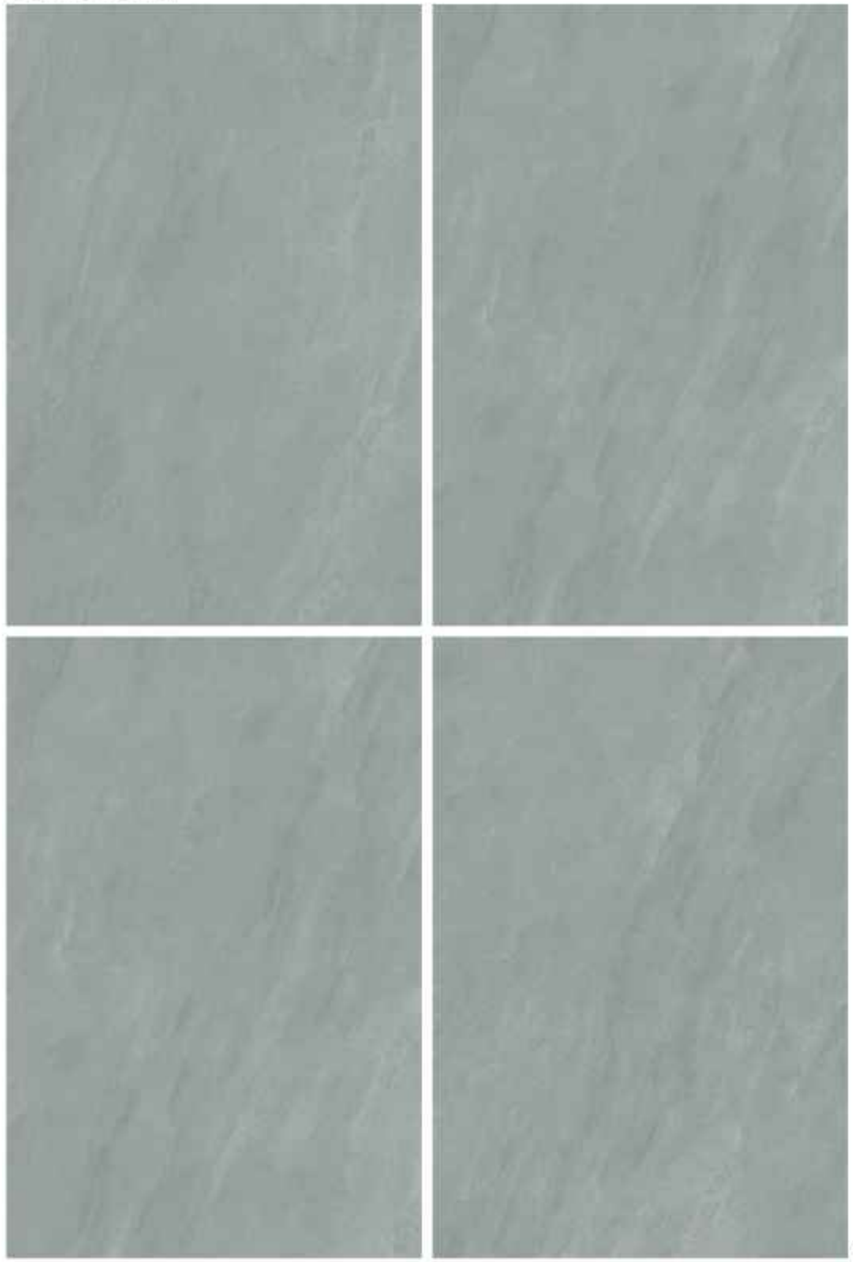

V3

1200x1800mm - Max 180 Plume Vermion Grey
800x1600mm - Enorme Plume Vermion Grey
600x1200mm - Grande Plume Vermion Grey



Sizes:
1200x1800mm
800x1600mm
600x1200mm

Surface:
Plume

Thickness:
9mm

360 VIEW



WALL: GRANDE PLUME VERMION GREY | GRANDE PLUME ERGOS BIANCO
SIZE: 600X1200MM | SURFACE: PLUME

9mm Thickness

FLOOR: GRANDE PLUME VERMION GREY | SIZE: 600X1200MM | SURFACE: PLUME
ITALMARMI TABLE: NECTAR BEIGE LUCIDO & NECTAR BEIGE OPACO | SIZE: 75X300MM | SURFACE: MATT

WALL: GRANDE PLUME VERMION GREY | SIZE: 600X1200MM | SURFACE: PLUME
ITALMARMI TABLE: NECTAR BEIGE LUCIDO & NECTAR BEIGE OPACO | SIZE: 75X300MM | SURFACE: MATT


FLOOR: GRANDE PLUME VERMION GREY | SIZE: 600X1200MM | SURFACE: PLUME
ITALMARMI TABLE: NECTAR BEIGE LUCIDO & NECTAR BEIGE OPACO | SIZE: 75X300MM | SURFACE: MATT



VERMION GREY LIGHT

V3

1200x1800mm - Max 180 Plume Vermion Grey Light
800x1600mm - Enorme Plume Vermion Grey Light
600x1200mm - Grande Plume Vermion Grey Light



Sizes:
1200x1800mm
800x1600mm
600x1200mm

Surface:
Plume

Thickness:
9mm

360 VIEW



WALL: GRANDE PLUME VERMION GREY LIGHT | GRANDE PLUME VERMION GREY
SIZE: 600X1200MM | SURFACE: PLUME


9mm Thickness

FLOOR: GRANDE PLUME VERMION GREY LIGHT | GRANDE PLUME VERMION GREY
SIZE: 600X1200MM | SURFACE: PLUME

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.

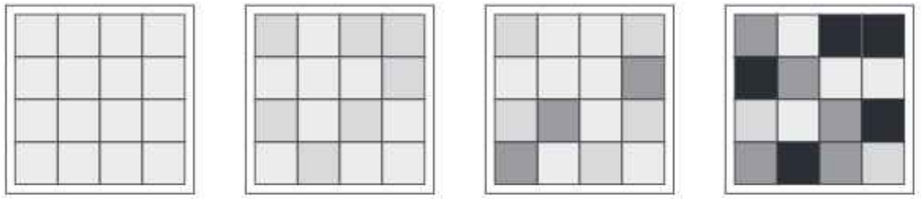

V1 Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation V3 Moderate Variation V4 Substantial Variation

PACKAGING DETAIL FOR EVERSTONE COLLECTION				
Nominal Size(mm)	**Thickness(mm)**	**Avg. weight per carton(Kgs)**	**No. of tiles per carton**	**Coverage area per carton**
1200x1800mm	9 mm	88.0 kgs	2	4.32 Square Meter / 46.50 Square Feet
800x1600mm	9 mm	51.0 kgs	2	2.56 Square Meter / 27.55 Square Feet
600x1200mm	9 mm	27.7 kgs	2	1.44 Square Meter / 15.50 Square Feet

TECHNICAL SPECIFICATIONS FOR EVERSTONE COLLECTION				
Characteristics	**Requirement as per IS 15622 :2017 E ≤ 0.08 Group B I a**	**Requirement as per ISO 13006:2018 Ev≤ 0.5%-Group B I a (Annex G)**	**Our Values**	**Test Method**
A) Dimension & Surface Quality	Rectified			
i) Length & Width	± 0.10%	± 0.30%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	± 0.10%	± 0.30%	± 0.10%	
iv) Rectangularity	± 0.10%	± 0.30%	± 0.10%	
v) Surface Flatness				
a) Center curvature (%) (max.Deviation)	± 0.5%	± 0.4%	**± 0.02%**	
b) Edge curvature (%) (max.Deviation)	± 0.5%	± 0.4%	**± 0.02%**	
c) Corner warpage (%) (max.Deviation)	± 0.5%	± 0.4%	**± 0.02%**	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Average 0.6<E, Individual Max 0.1%	Es 0.5, Individual max 0.6%	Av 0.08 %	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Avg. 35, Individual 32 min	Avg 35, Individual 32 min	Avg-38	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1300	1300	Min 1400	
iv) Moisture Expansion in mm/m	0.02	Test Method Available	0.02 Max	IS 13630 Part 3/ISO-10545-10
v) Scratch Hardness of surface (Mohs)	Min 5	N/A	5	IS 13630 Part 13
vi) Resistant to Abrasion of Glazed Tiles (Class I to V)	Min II	Report abrasion class and cycles passed	Class IV	IS 13630 Part 11 /ISO 10545-7
vii) Coefficient of linear thermal expansion from ambient temperature to 10^{2} C	6 X 10^{-6} K^{-1} max	Test Method Available	Max 5.5 X 10^{-6} K^{-1}	IS 13630 Part 4/ ISO 10545-8
viii) Thermal Resistant	10 cycle min	Test Method Available	Passed 10 cycle	IS 13630 Part 5/ISO-10545-9
ix) Crazing Resistant	4 cycle @ 7.5bar min	Required	Passed 4 cycle	IS 13630 Part 9/ISO 10545-11
x) Impact Resistant as Coefficient of Restitution (COR)	0.55 Min	Test Method Available	0.75-0.90	IS 13630 part 14/ISO 10545-5
xi) Bulk Density (gm/cc)	2.2	N.A	2.25	IS 13630 Part 2
xii) Coefficient of Friction	Where required manufacturer to declare value	Where required manufacturer to declare value	Depends upon Glazed surface	ISO 10545-17
xiii) Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistant (Glazed Tiles)				
i) Stain Resistant	Min Class 1	Min Class 3	Class-1	IS 13630 Part 8 &ISO 10545-14
ii) Resistant to household chemicals	Min Class AA	Min. Class B	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistant to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Manufacturer is to state classification	Min Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome
Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com