





Power of Desire





Somany Ceramics Limited: Noida: F-36, Sector-6; Ph.: 0120-4627900.

Ahmedabad: 601 to 606, 6th floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S. G, Highway, Ahmedabad- 382481, Ph.: 079-27661103 & 04 Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913 www.somanyceramics.com 1 e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)









Available on the App Store

GET IT ON Google play





ZAMEEN SE JUDEY



Indulge in opulence with our Rocken Series, featuring exquisite full-body polish and captivating matt tiles. Elevate your interiors with a perfect blend of sophistication and durability. Immerse yourself in the timeless allure of these tiles, offering a seamless fusion of style and substance. Transform your space into a haven of modern elegance with the Rocken Series - where luxury meets practicality. Redefine your surroundings and experience the epitome of aesthetic excellence.














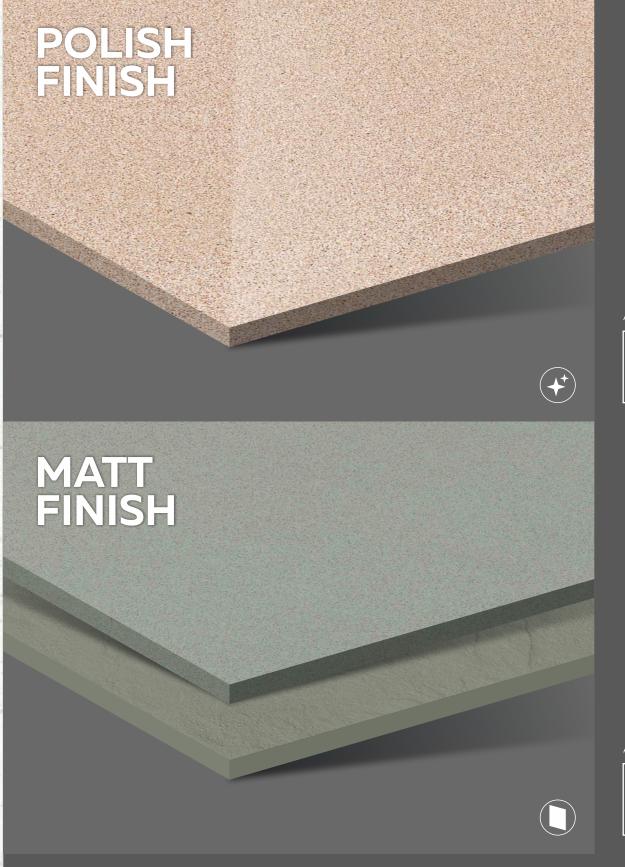












COAL COLLECTION










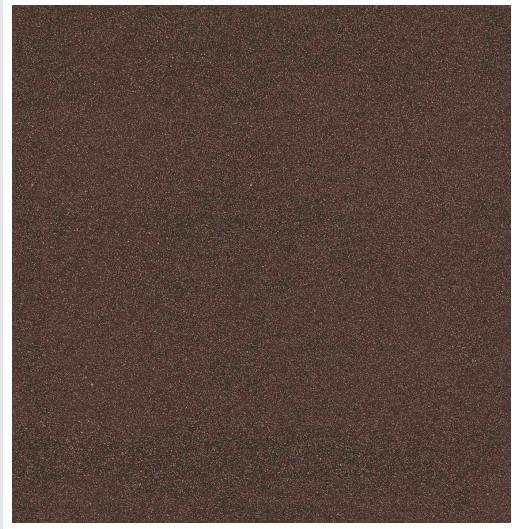

ROCKEN COFFEE



600x600mm 600x1200mm Matt/Polish Matt

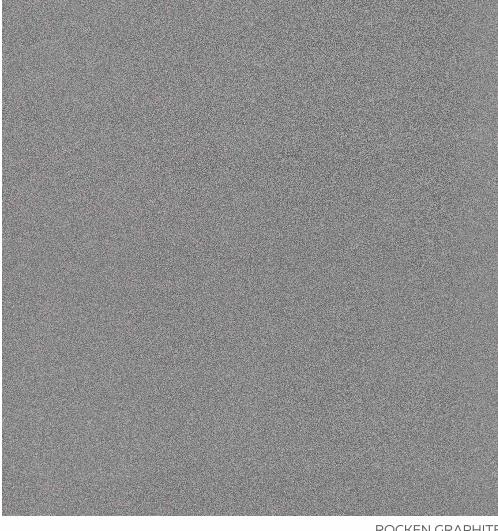

ROCKEN GRAPHITE



600x600mm 600x1200mm Matt/Polish Matt



COAL COLLECTION













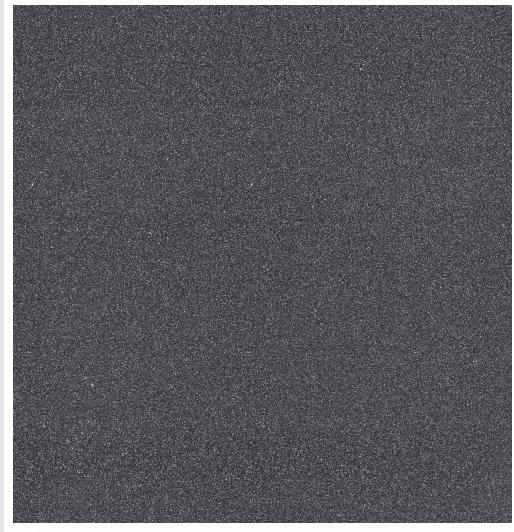


ROCKEN NERO



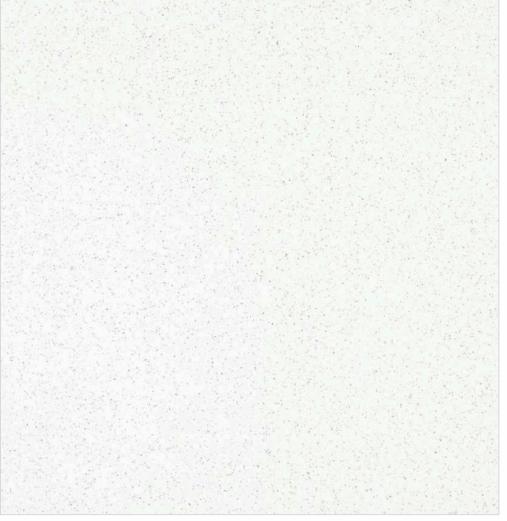

ROCKEN WHITE PEARL



600x600mm Matt/Polish 600x1200mm Matt/Polish



SNOW COLLECTION















ROCKEN CREMA



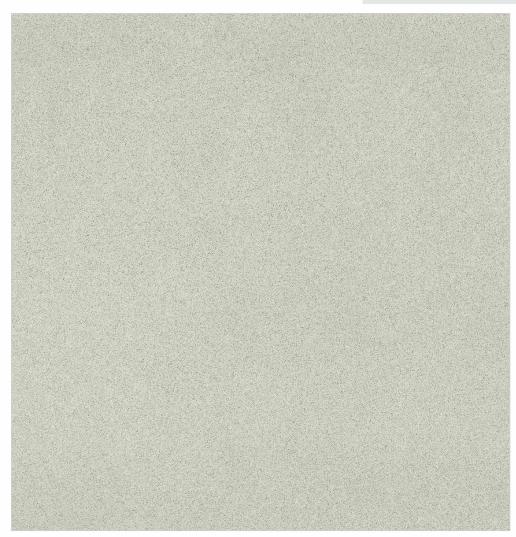

ROCKEN MINT


















ROCKEN MUSHROOM

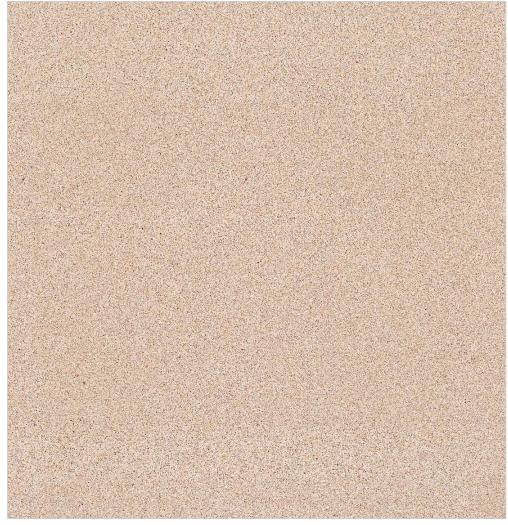

ROCKEN SAND

Available Sizes & Finish:



600x600mm Matt



Available Sizes & Finish:

600x600mm Matt/Polish

















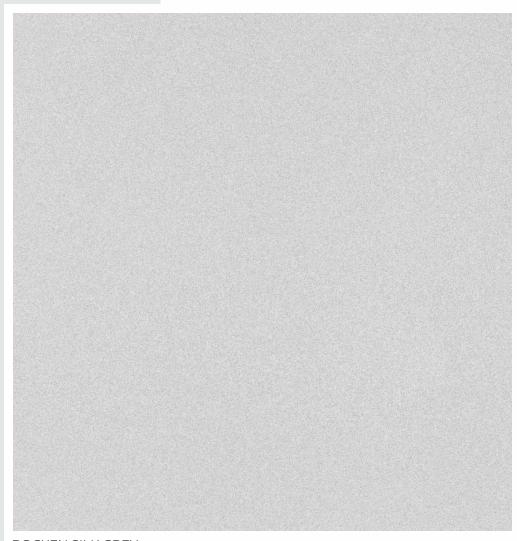

ROCKEN SILK GREY






ROCKEN STONE GREY

Available Sizes & Finish:




600x600mm Matt

SNOW COLLECTION

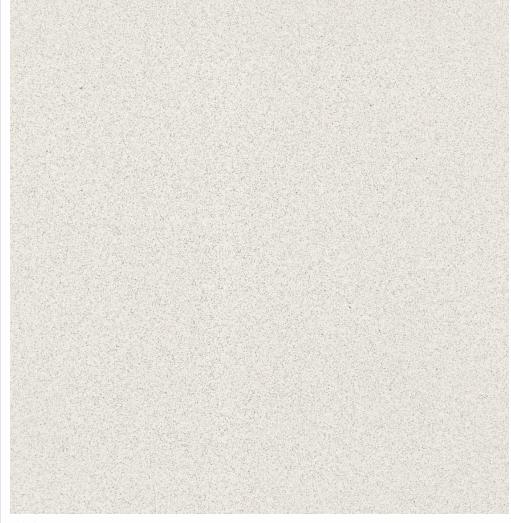

ROCKEN WHITE



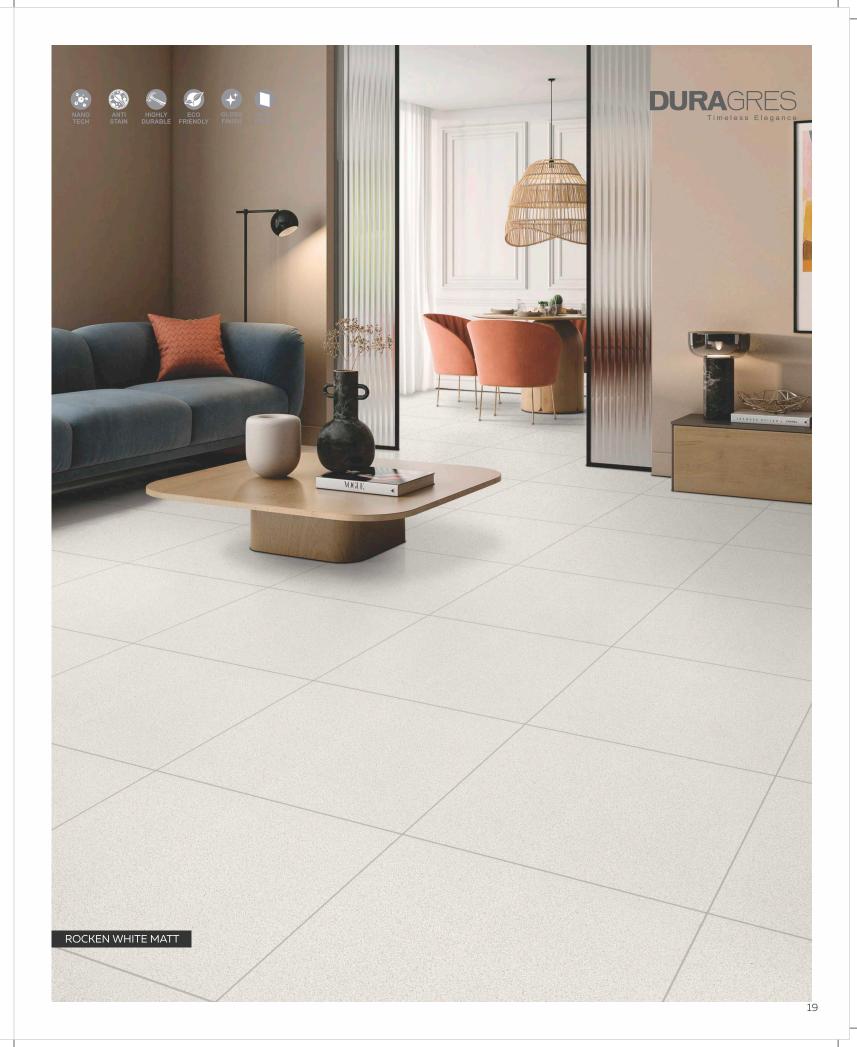



COAL COLLECTION













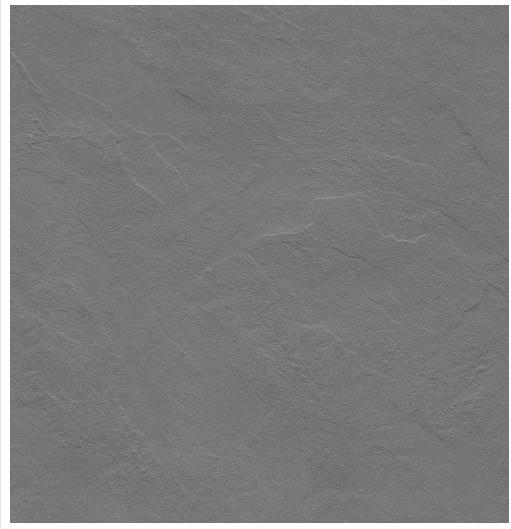


ROCKEN SLATE BLACK



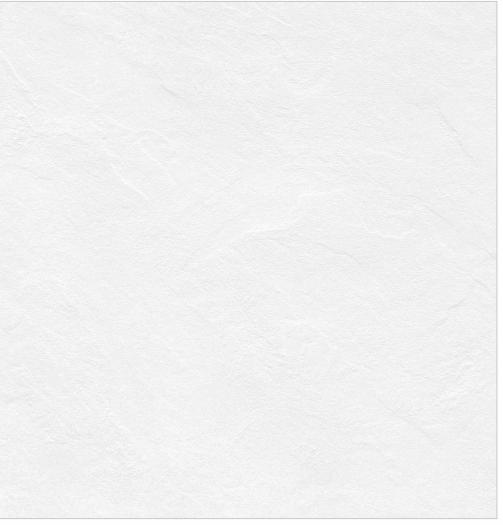

ROCKEN SLATE SUPER WHITE



SNOW COLLECTION













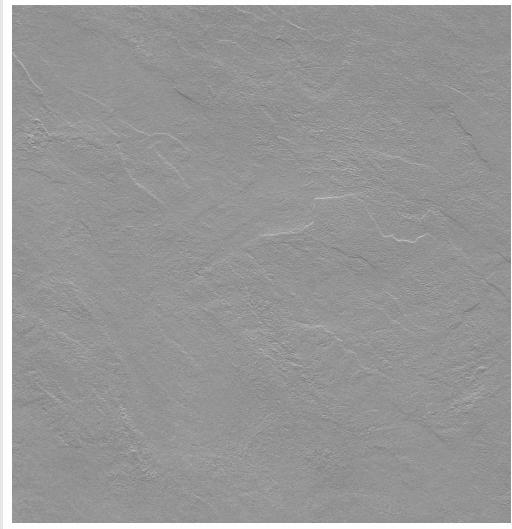

ROCKEN SLATE GREY



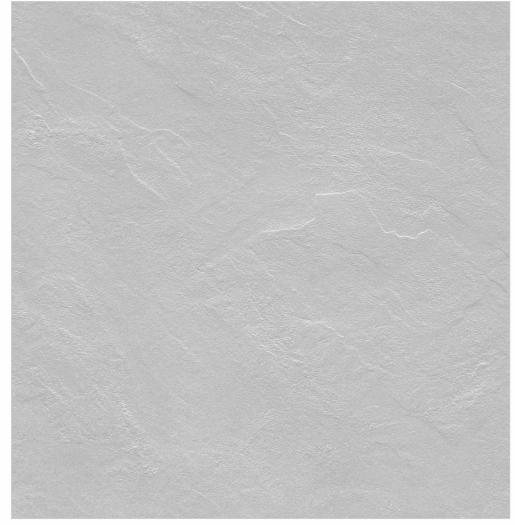

ROCKEN SLATE ASH



SNOW COLLECTION
















ROCKEN SLATE CREMA



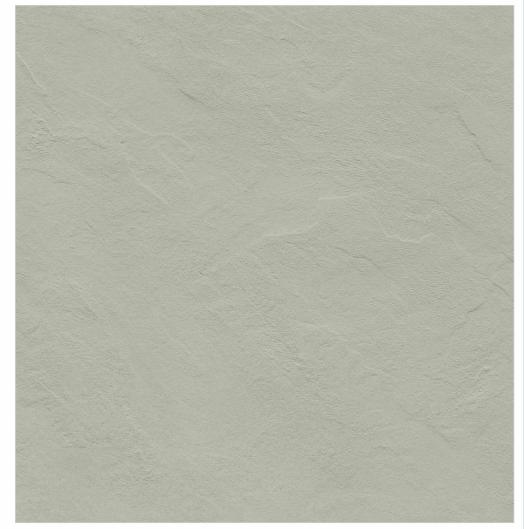

ROCKEN SLATE MINT



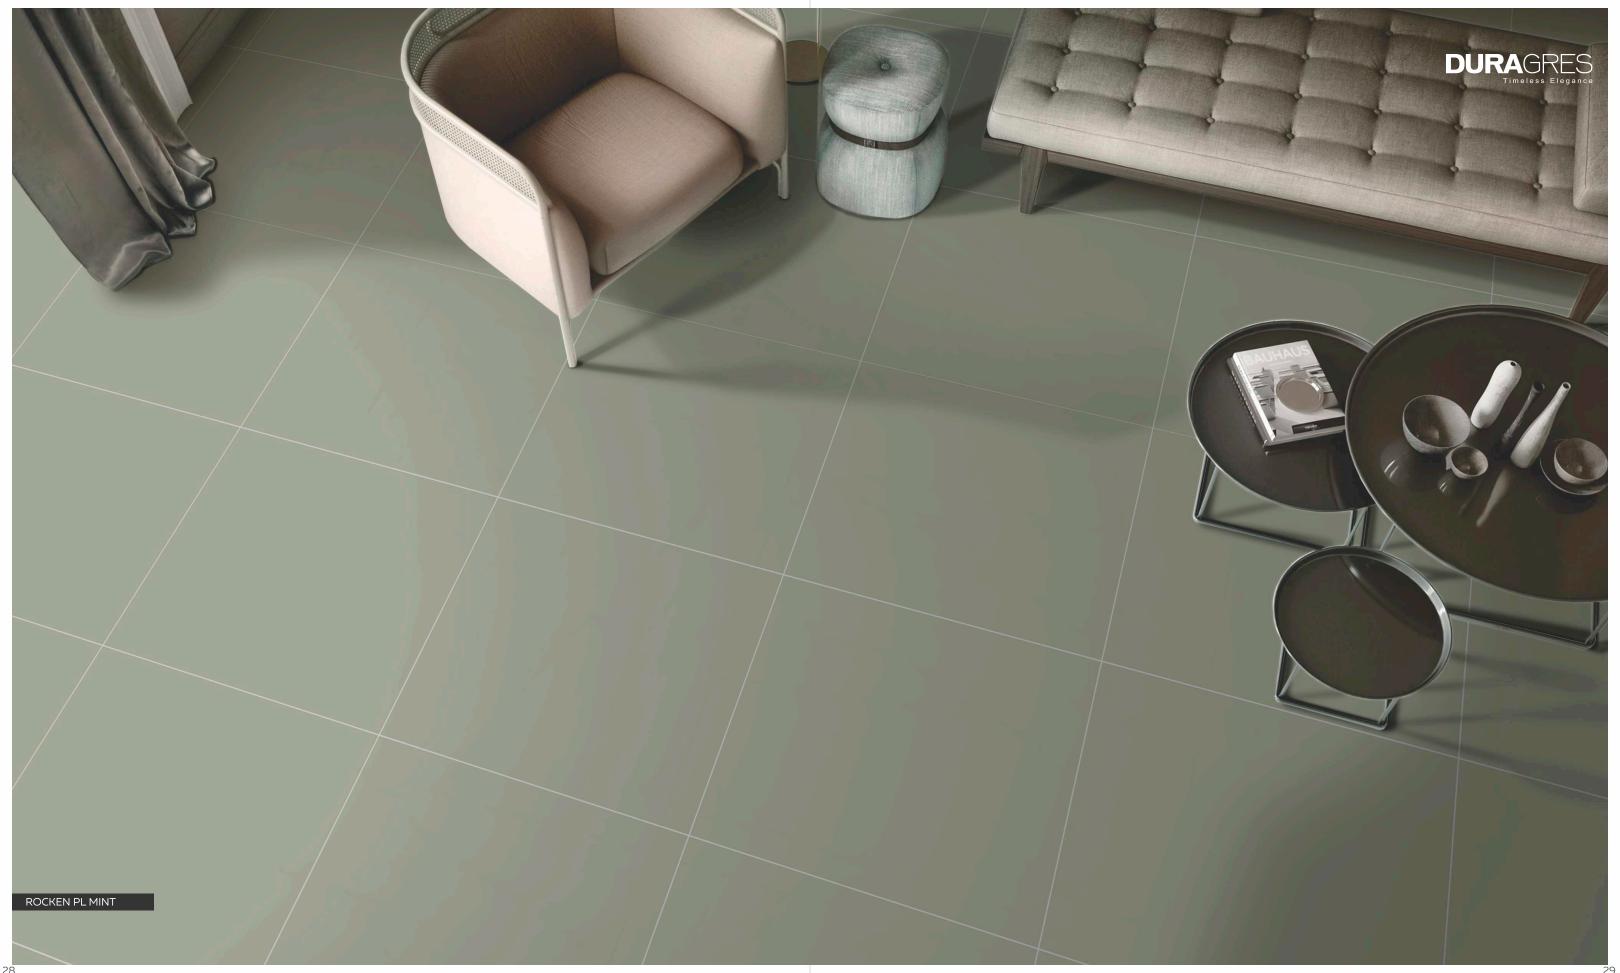

COAL COLLECTION












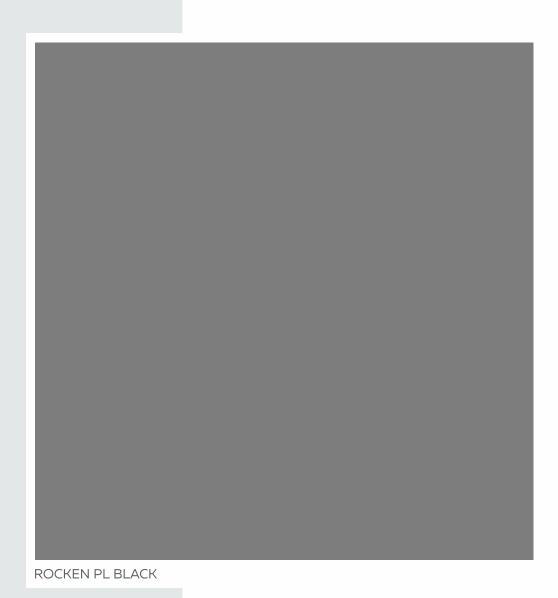

Available Sizes & Finish:

600x600mm Matt

600x1200mm Matt

ROCKEN PL SUPER WHITE














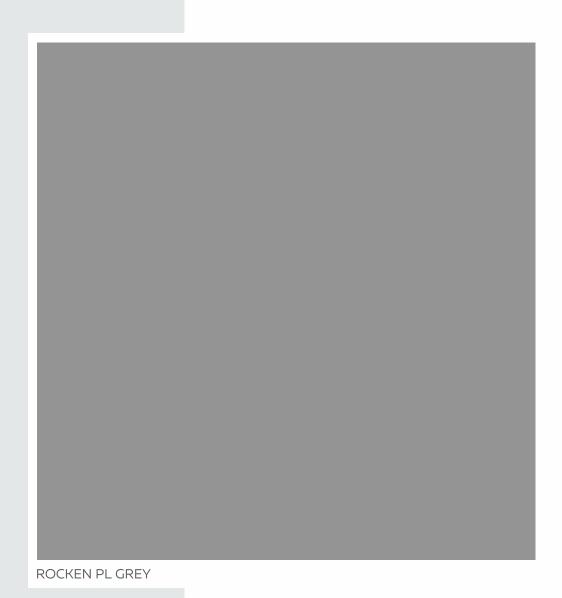


Available Sizes & Finish:

600x600mm Matt

600x1200mm Matt

ROCKEN PL ASH

















Available Sizes & Finish:

600x600mm 600x1200mm Matt Matt

Available Sizes & Finish:

600x600mm 600x1200mr



TECHNICAL SPECIFICATION



37


PACKIN	PACKING DETAIL FOR 600x600mm & 600x1200mm Rocken Tiles							
Nominal Size	Thickness (mm)	Av. Wt. per carton (Kg)	No. of Tiles per carton	Coverage area per carton				
600X600(Rocken Series Matt)	8.5mm	28.5 Kg.	4	1.44 Sq. Mtr. / 15.50 Sq. Ft.				
600X600(Rocken Series Polish)	8.0mm	26.0 Kg.	4	1.44 Sq. Mtr. / 15.50 Sq. Ft.				
600X1200(Rocken Series Matt)	8.5mm	28.5 Kg.	2	1.44 Sq. Mtr. / 15.50 Sq. Ft.				
600X1200(Rocken Series Polish)	8.0mm	26.0 Kg.	2	1.44 Sq. Mtr. / 15.50 Sq. Ft.				

TECHNICAL SPECIFICATION FOR 600x600mm & 600x1200mm Rocken Tiles							
	Characteristics	Requirement as per IS 15622 :2017 0.08 < E ≤ 3% Group B I b	Requirement as per ISO 13006:2018 ≤ 0.5% Group B I a	Our Values	Test Method		
Α	Dimension & Surface Quality						
1	Length & Width	± 0.1%	± 0.3%	± 0.1%			
ii	Thickness	± 5.0%	± 5.0%	± 5.0%			
iii	Straightness of Side	± 0.1%	± 0.3%	± 0.1%			
iv	Rectengularity	± 0.1%	± 0.3%	± 0.1%			
٧	Surface Flatness				IS 13630 Part 1/ ISO 10545-2		
а	Center Curvature (Max.Deviation)	± 0.50%	± 0.4%	± 0.2 %	.5 25550 Full Ly 150 10545 Z		
b	Edge Curvature (Max.Deviation)	± 0.50%	± 0.4%	± 0.2 %			
С	Corner Warpage (Max.Deviation)	± 0.50%	± 0.4%	± 0.2 %			
vi	Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects			
В	Physical Properties						
1	Water Absorption	Av. $0.08 < E \le 3 \%$, Individual 3.3 max	Av ≤ 0.5 %, Individual 0.6% max	Av ≤ 0.5 %, Individual 0.6% Max	IS 13630 Part 2/ ISO 10545-3		
ii	Modulus of Rupture [N/mm²]	Avg. 30, Individual 27 Min	Avg. 35, Individual 32 Min	Avr. > 35			
iii	Breaking Strength in N	1100 N	1300 N	Min. 1300	IS 13630 Part 6/ISO 10545-4		
iv	Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10		
v	Scratch Hardness of Surface (Mohs)	Min 5	N.A	Min. 5	IS 13630 Part 13		
vi	Resistance to Abrasion of Glazed Tiles (Class I to V)	Min II	Abrasion Class & Cycle passed	Class-V	IS 13630 Part 11/ISO-10545-7		
vii	Coefficient of Linear Thermal Expansion from Ambient Temperature to 100 0 C	7 X 10 -6 K-1 max	Test Method Available	Max 6 X 10 -6 K-1 max	IS 13630 Part 4/ ISO 10545-8		
viii	Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9		
ix	Crazing Resistance	4 cycle @ 7.5bar min	Required	4 Cycle Passed	IS 13630 Part 9/ISO 10545-11		
Х	Impact Resistance as Co-efficient of Restitution (COR)	0.55 Min	Required	Min. 0.55 Min.	IS 13630 Part-14/ISO 10545-5		
xi	Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12		
С	Chemical Resistance (Glazed Tiles)						
l l	Stain Resistance	Min Class 1	Min. Class 3	Min Class-1	IS 13630 Part 8 &ISO 10545-14		
ii	Resistance to Household Chemicals	Min Class AA	Min Class GB	Min Class AA	IS 13630 Part 8/ ISO 10545-13		
iii	Resistance to Acids and Alkalis (with exception of Hydrofluoric Acid and its compounds)	Required if agreed	Declared Value ^f	Min Class AA			

Notes

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. "Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

36

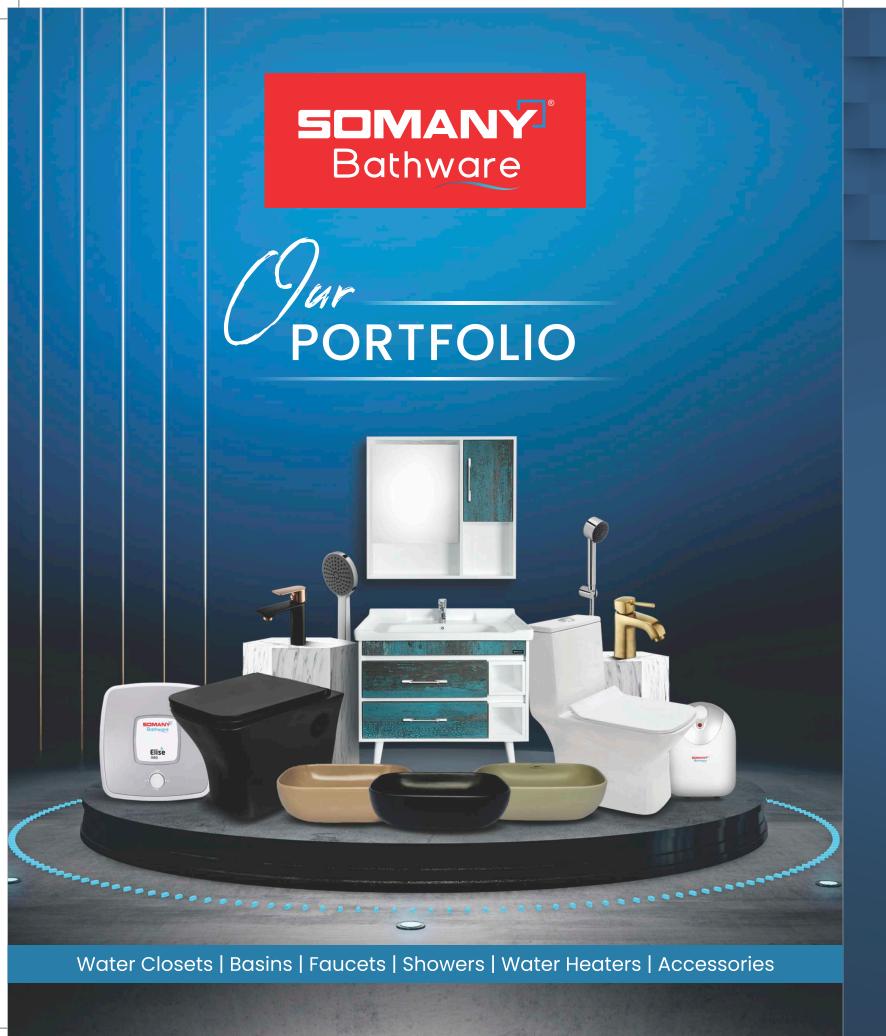





TILE ADHESIVE



HIGH STRENGTH POLYMER MODIFIED

TILE ADHESIVE



BENEFITS

- » READY AND EASY TO USE
- » EXCELLENT BONDING WITH ALL SURFACES
- > FAST SETTING
- SELF-CURING

USES **(**

- FOR FIXING ALL TYPE OF TILES
- FOR NEW FLOORING AND RENOVATION
- CAN BE USED FOR TILE ON TILE