# DURAGRES

**ROCKSTONE**
collection

600 x 600mm

SOMANY

NEW ARRIVAL
—
JAN 2026

UNIT 01



**RANGE** VOL 1 | JAN 2026

UNIT 01

SOMANY


**Somany Ceramics Limited**
**Corporate Office:** F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
**Ahmedabad Office:** 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
**Registered Office:** 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
**www.somanyceramics.com | E-mail: customer.care@somanyceramics.com**

**Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)**

# Rugged Grandeur, Timeless Tactility

## ROCKSTONE
collection

In the quietude of stone lies centuries of strength, weathered by time yet unyielding in spirit. The Rockstone collection channels the rugged splendour of stone, capturing nature's primal essence where surfaces whisper stories of geological grandeur: textured with rustic character.

The 600x600mm format empowers Rockstone to unlock design possibilities across diverse spatial narratives, spanning indoor and outdoor realms. The Rustic finish delivers tactile, weathered character with pronounced texture that defines its authentic appeal. Subtle surface variations mirror the organic irregularities of natural stone formations, while versatile shades harmonise effortlessly with any decor style, whether contemporary, traditional, or timelessly classic. Rockstone anchors sun-drenched terraces, bustling parking areas, and balconies with weather-resistant durability, while bringing raw authenticity to your spaces with its timeless soul.








## TECHNICAL FEATURES

- Water Repellent
- Blended Smoothness
- Non-Reflective
- Easy to Clean
- Abrasion and Wear-Resistant
- Hygienic Surface
- Thermal Resistant
- Frost Resistant
- Load and Stress-Resistant
- Chemical Resistant
- Temperature Resistant

## APPLICATION AREAS

- Residential Areas
- Commercial Areas
- Hospitals
- Shops and Malls
- Hotels and Restaurants
- Schools and Colleges
- Outdoor Furniture
- Public Places



**ROCKSTONE** COLLECTION

Tile Shown: **ROCKSTONE PETRA COTTO**

Size

600x600mm


Surface

Rustic

Thickness

**12mm**

12mm Thickness

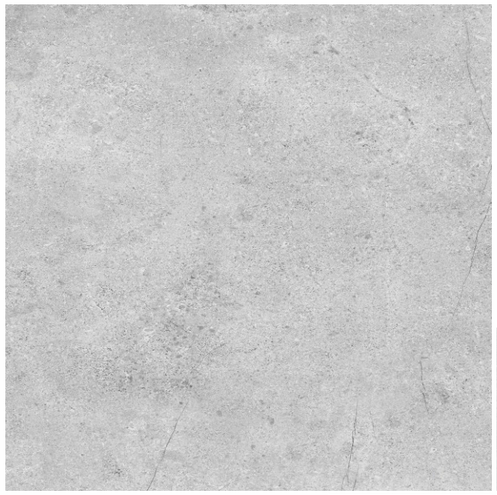




ROCKSTONE PETRA SILVER
V3





Size **600x600mm** | Surface **Rustic** | Thickness **12mm**




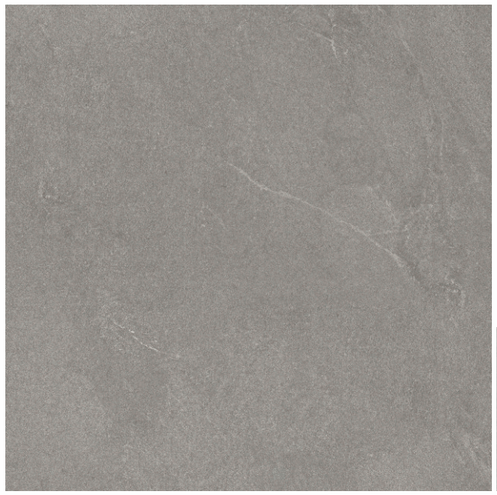



ROCKSTONE PETRA ASHEN
V3







Size **600x600mm** | Surface **Rustic** | Thickness **12mm**








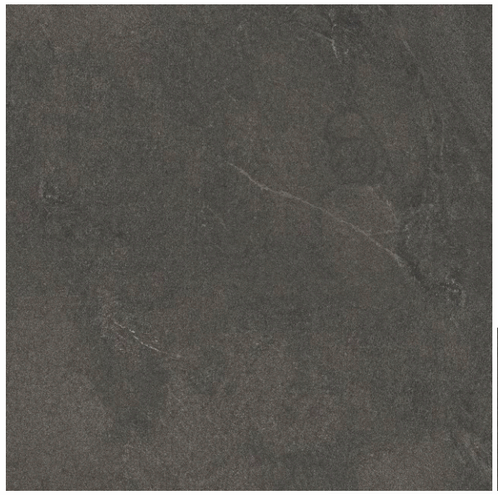



ROCKSTONE PETRA NERO
V3





Size **600x600mm** | Surface **Rustic** | Thickness **12mm**







ROCKSTONE PETRA COTTO
V3





Size **600x600mm** | Surface **Rustic** | Thickness **12mm**





**ROCKSTONE** COLLECTION

Tiles Shown: **ROCKSTONE KRONIO SILVER**
**ROCKSTONE KRONIO SMOKY**

Size
600x600mm

Surface
Rustic

Thickness
**12mm**

12mm Thickness









ROCKSTONE KRONIO SILVER
V4

| Size | Surface | Thickness |
|---|---|---|
| **600x600mm** | **Rustic** | **12mm** |











ROCKSTONE KRONIO SMOKY
V4

| Size | Surface | Thickness |
|---|---|---|
| **600x600mm** | **Rustic** | **12mm** |

















ROCKSTONE KRONIO COTTO
V4


| Size | Surface | Thickness |
|---|---|---|
| **600x600mm** | **Rustic** | **12mm** |











ROCKSTONE LIZON COTTO
V4

| Size | Surface | Thickness |
|---|---|---|
| **600x600mm** | **Rustic** | **12mm** |





**ROCKSTONE** COLLECTION

Tile Shown: **ROCKSTONE VISO SILVER**
**ROCKSTONE VISO ASHEN**

Size
600x600mm

Surface
Rustic


Thickness
12mm

12mm Thickness









ROCKSTONE LIZON SILVER
V4

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**










ROCKSTONE LIZON ASHEN
V4

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**





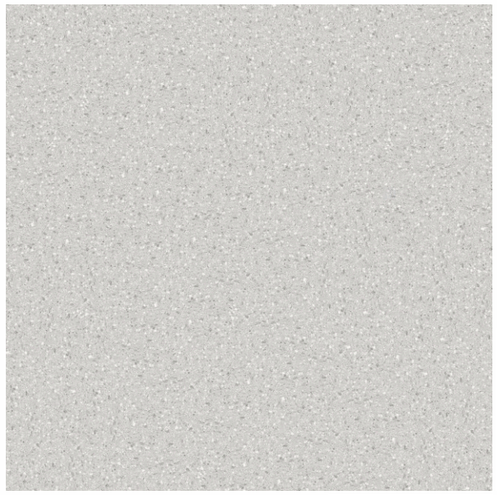








ROCKSTONE VISO SILVER
V1

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**









ROCKSTONE VISO ASHEN
V1

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**



**ROCKSTONE** COLLECTION

Tile Shown: **ROCKSTONE CAJA NATURAL**



Size

600x600mm

Surface

Rustic

Thickness

**12mm**

12mm Thickness






ROCKSTONE CAJA CARAMEL
V4

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**





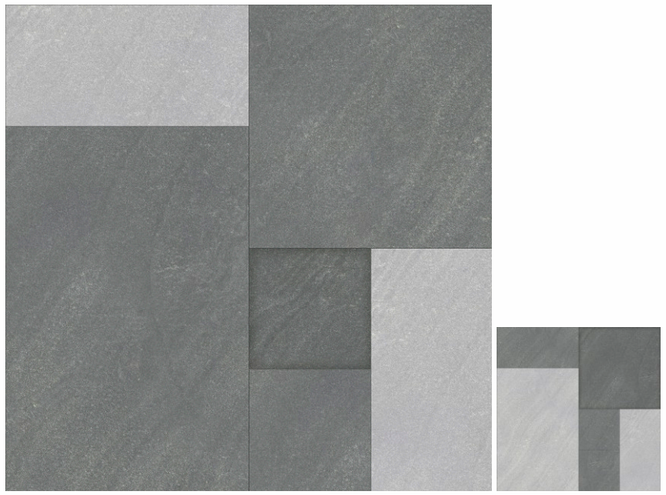




ROCKSTONE CAJA NERO
V4

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**















ROCKSTONE CAJA NATURAL
V4

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**





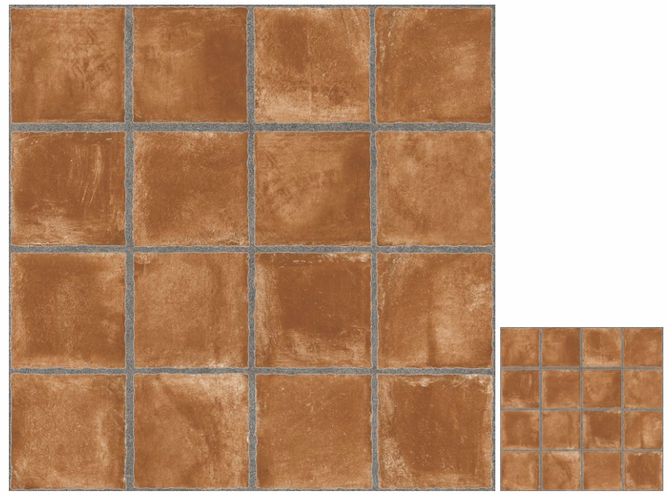




ROCKSTONE ARCA COTTO
V1

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**







**ROCKSTONE** COLLECTION

Tile Shown: **ROCKSTONE ARCA SMOKY DECOR**
**ROCKSTONE ARCA SMOKY**


Size
600x600mm

Surface
Rustic


Thickness
**12mm**


12mm Thickness





ROCKSTONE ARCA
SMOKY DECOR
V3







Size
**600x600mm**


Surface
**Rustic**


Thickness
**12mm**

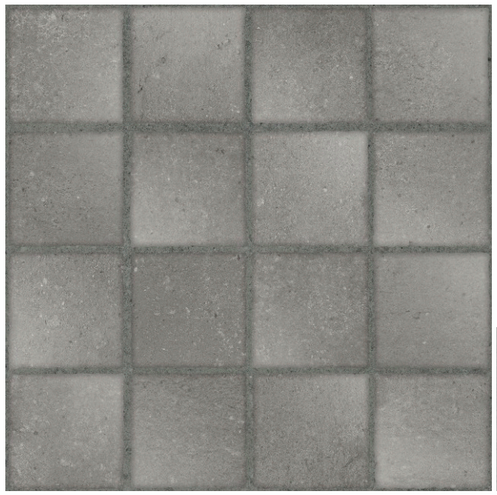



ROCKSTONE ARCA SMOKY
V3






Size
**600x600mm**


Surface
**Rustic**

Thickness
**12mm**







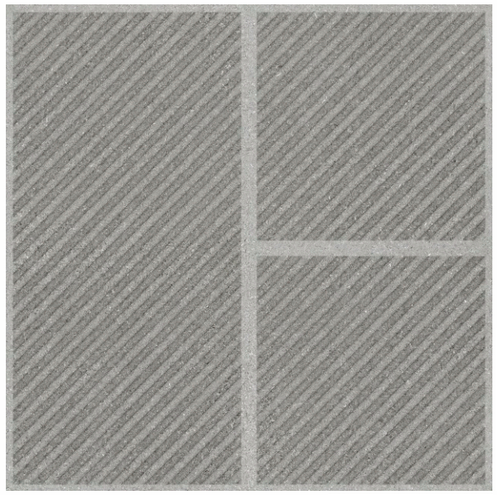



ROCKSTONE FILA ASHEN
V1





Size
**600x600mm**


Surface
**Rustic**

Thickness
**12mm**

## DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.

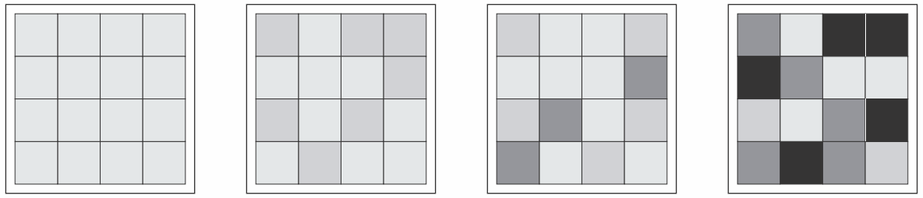

**V1** Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation V3 Moderate Variation V4 Substantial Variation





## TECHNICAL SPECIFICATION

| PACKAGING DETAIL FOR ROCKSTONE COLLECTION | | | | |
|---|---|---|---|---|
| Nominal Size (mm) | Thickness (mm) | Avg. Wt. Per Carton (Kg.) | No. of Tiles Per Carton | Coverage Area Per Carton |
| 600x600mm | 12.0 mm | 28.0 kgs. | 3 | 1.08Sq. mtr / 11.62 Sq. ft. |

| TECHNICAL SPECIFICATION FOR ROCKSTONE COLLECTION | | | | |
|---|---|---|---|---|
| Characteristics | Requirement as per IS 15622:2017 E≤0.08 Group BIa | Requirement as per ISO 13006 ≤ 0.5% Group BIa (Annex G) | Our Value | Test Method |
| (A) Dimension & Surface Quality | | | | IS 13630 Part 1 / ISO 10545-2 |
| I) Length & Width | ±0.1% | ± 0.3% | ±0.1% | |
| ii) Thickness | ± 5.0% | ± 5.0% | ± 4.0% | |
| iii) Straightness of Side | ±0.1% | ± 0.3% | ± 0.1% | |
| iv) Rectangularity | ±0.1% | ± 0.3% | ± 0.1% | |
| v) Surface Flatness | | | | |
| a) Center Curvature (%) (Max. Deviation) | ± 0.5 % | ± 0.4% | ±0.2% | |
| b) Edge Curvature (%) (Max. Deviation) | ± 0.5 % | ± 0.4% | ±0.2% | |
| c) Corner Warpage (%) (Max. Deviation) | ± 0.5 % | ± 0.4% | ±0.2% | |
| vi) Surface Quality | Min. 95 % of tiles will be free from visible defects | 95 % of tiles will be free from visible defects | 95 % of tiles will be free from visible defects | |
| B) Physical Properties | | | | |
| I) Water Absorption | Avg. E ≤ 0.08% , Individual 0.1 Max | Avg. ≤ 0.5% , Individual 0.6% Max | Avg. 0.08% | IS 13630 Part 2 / ISO 10545-3 |
| ii) Modulus of Rupture [N/mm2] | Avg. 35 , Individual 32 Min | Avg. 35 , Individual 32 Min | Avg. 40 | IS 13630 Part 6 / ISO 10545-4 |
| iii) Breaking Strength in N | Min. 1300 | Min 1300 | Min 3000 | |
| iv) Moisture Expansion in mm/m | 0.02 | Test Method Available | Max 0.02 | IS 13630 Part 3 / ISO-10545-10 |
| v) Scratch Hardness of Surface (Mohs) | Min 5 | NA | 4-6 (Depend on Surface) | IS 13630 Part 13 |
| vi) Resistant to Abrasion of Glazed Tiles (Class I to V) | Min II | Report Abrasion Class and Cycle Passed | Depend on Glazed Surface | IS 13630 Part 11 / ISO 10545-7 |
| vii) Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°C | 6X $10^{-6}K^{-1}$ Max | Test Method Available | 5X 10-$6^{-6}K^{-1}$ Max | IS 13630 Part 4 / ISO 10545-8 |
| Viii) Thermal Resistant | 10 Cycle Min | Test Method Available | 10 Cycle Passed | IS 13630 Part 5 / ISO-10545-9 |
| ix) Crazing Resistant | 4 Cycle @ 7.5bar Min | Required | 4 Cycle Passed | IS 13630 Part 9 / ISO 10545-11 |
| x) Impact Resistant as Coefficient of Restitution (COR) | 0.55 Min | Test Method Available | 0.75-0.95 | IS 13630 Part 14 / ISO 10545-5 |
| xi) Bulk Density (gm/cc) | 2.2 | NA | 2.3 | SO-10545-2 |
| x) Coefficient of Friction | Where Required Manufacturer to | Where Required Manufacturer to | Depend on Glazed Surface | ISO 10545-17 |
| xi) Frost Resistant | Required | Required | 100 Cycle Passed | IS 13630 Part 10 / ISO-10545-12 |
| C) Chemical Resistant (Glazed Tiles) | | | | |
| I) Stain Resistant | Min Class-1 | Min. Class 3 | Min Class 1 / Class 3 | IS 13630 Part 8 / ISO 10545-14 |
| ii) Resistant to Household Chemicals | Min Class AA | Min. Class B | Min Class AA | IS 13630 Part 8 / ISO 10545-13 |
| iii) Resistant to Acids and Alkalis (With exception of Hydrofluoric Acid and its Compounds) | Required if Agreed | Manufacturer is to State Classification | Min Class AA | |


The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE



# TILE VISUALISER

SOMANY

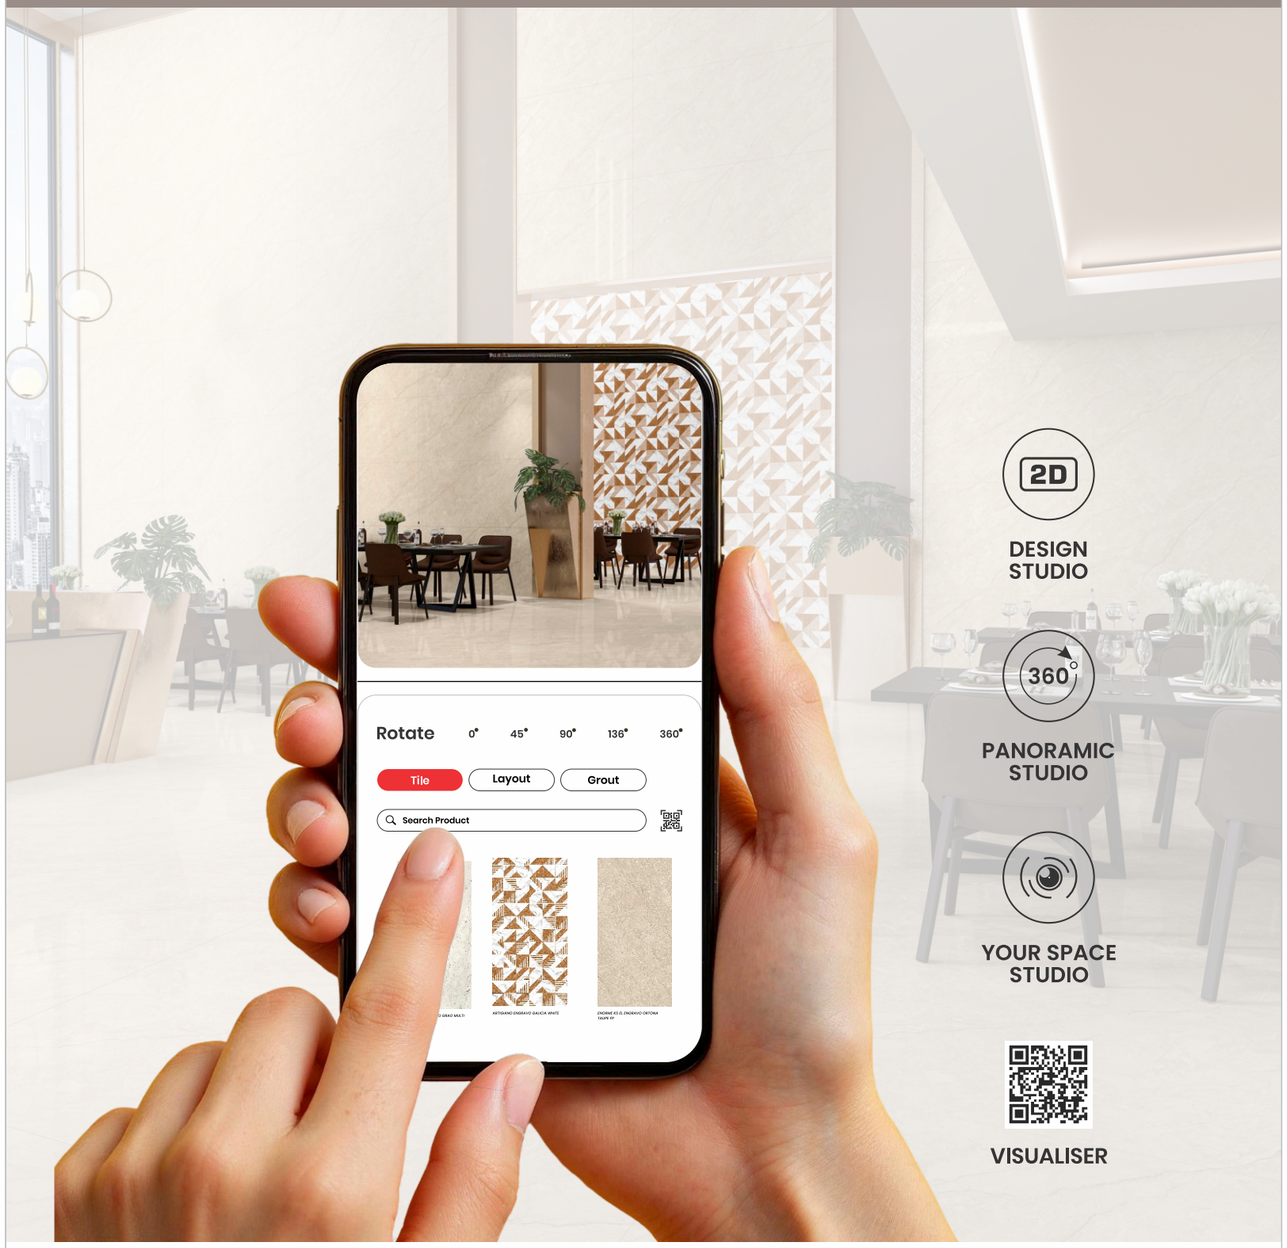


**Choosing the perfect tile for your dream home should be exciting, not overwhelming!** With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

**Your dream tile? Just a click away.**

Toll Free: 1800-103-0004 | www.somanyceramics.com

# SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner






## Lasting Bonds Made Ezy

**Behind Every Stunning Tile, there's a Stronger Bond!**
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at **www.somanyceramics.com** or call on **Toll Free: 1800 103 0004**

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome

Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com