DURAGRES

ROCKSTONE
collection

600 x 600mm

SOMANY

NEW ARRIVAL
—
FEB 2026

UNIT 04



RANGE VOL 1 | FEB 2026

UNIT 04

SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

Rugged Grandeur, Matt Finesse

ROCKSTONE

In the quietude of stone lies centuries of strength, weathered by time yet unyielding in spirit. The Rockstone collection channels the rugged splendour of stone, capturing nature's primal essence where surfaces whisper stories of geological grandeur: textured with rustic character and grounded in matt elegance.

The 600x600mm format empowers Rockstone to unlock design possibilities across diverse spatial narratives, spanning indoor and outdoor realms. The collection comes in two distinctive finishes: Matt, delivering understated sophistication with a soft, non-reflective surface; and Rustic, offering tactile, weathered character with pronounced texture. Subtle surface variations mirror the organic irregularities of natural stone formations, while versatile shades harmonise effortlessly with any décor style, whether contemporary, traditional, or timelessly classic. Rockstone anchors sun-drenched terraces, bustling parking areas, and balconies with weather-resistant durability, while bringing raw authenticity to your spaces with its timeless soul.



2
Surfaces

1
Size

24
Designs



TECHNICAL FEATURES

- Water Repellent
- Blended Smoothness
- Non-Reflective
- Easy to Clean
- Abrasion and Wear-Resistant
- Hygienic and Safe
- Thermal Resistant
- Frost Resistant
- Load and Stress-Resistant
- Chemical Resistant
- Temperature Resistant

APPLICATION AREAS

- Residential Areas
- Commercial Areas
- Hospitals
- Shops and Malls
- Hotels and Restaurants
- Schools and Colleges
- Outdoor Furniture
- Public Places



ROCKSTONE COLLECTION

Thickness **12mm**



ROCKSTONE COLLECTION

Tile Shown: **ROCKSTONE CATRIA MOCHA MT**

Size	Surface	Thickness
600x600mm	Matt	12mm

Scan for a virtual view





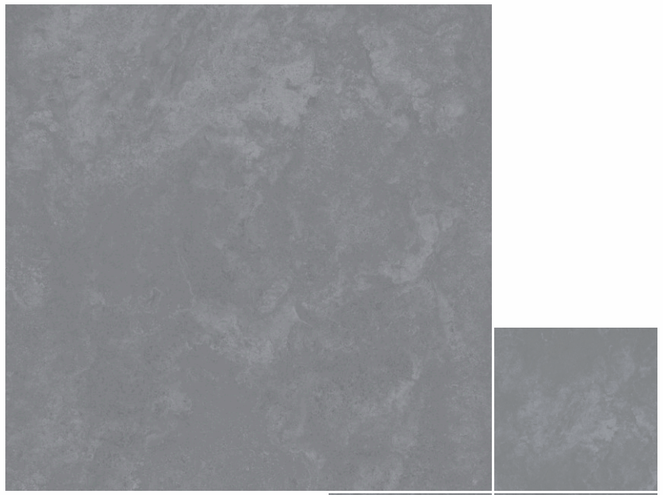

ROCKSTONE
CATRIA ASH MT
Faces: **4**

Size	Surface	Thickness
600x600mm	**Matt**	**12mm**



ROCKSTONE
CATRIA BONE MT
Faces: **4**

Size	Surface	Thickness
600x600mm	**Matt**	**12mm**

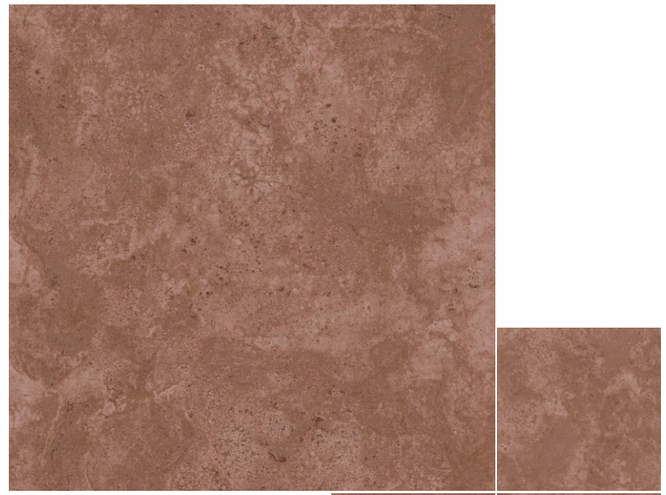

ROCKSTONE
CATRIA COTTO MT
Faces: **4**

Size	Surface	Thickness
600x600mm	**Matt**	**12mm**

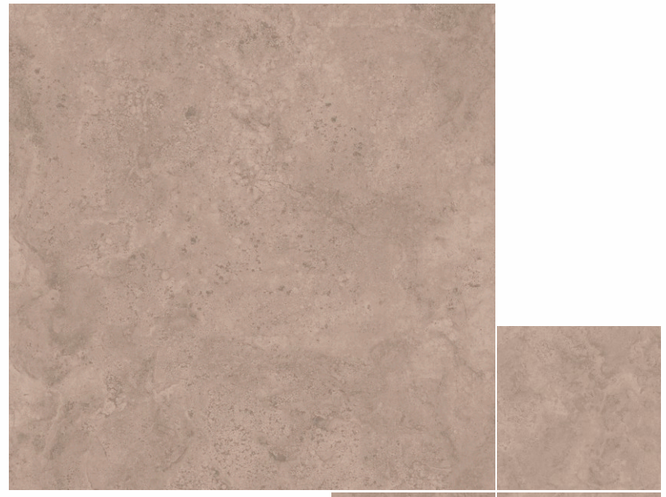

ROCKSTONE
CATRIA MOCHA MT
Faces: **4**

Size	Surface	Thickness
600x600mm	**Matt**	**12mm**



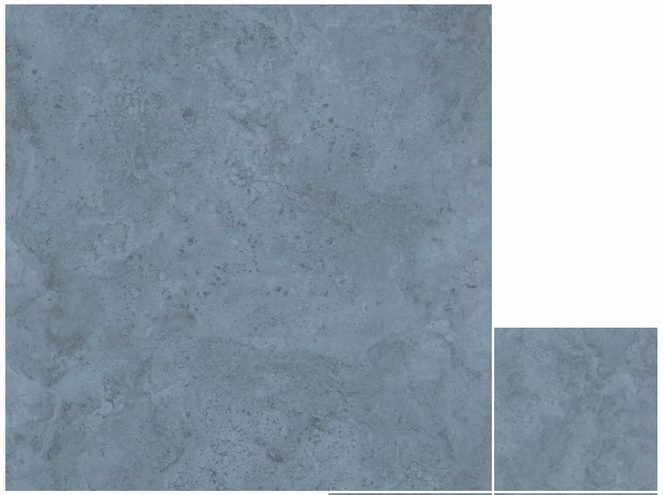

ROCKSTONE
CATRIA PIGEON MT
Faces: **4**

Size	Surface	Thickness
600x600mm	**Matt**	**12mm**

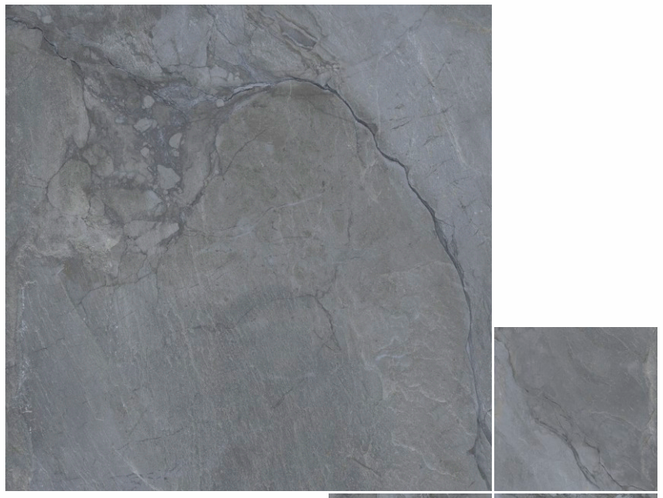

ROCKSTONE
ELAMAR IRON MT
Faces: **8**

Size	Surface	Thickness
600x600mm	**Matt**	**12mm**



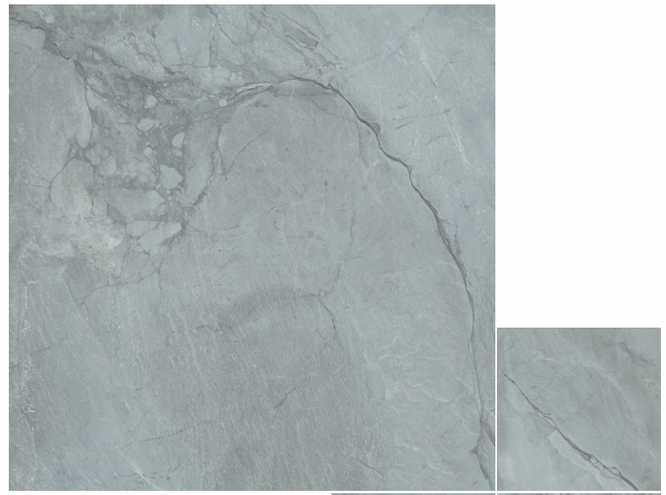

ROCKSTONE
ELAMAR SAGE MT
Faces: **8**

Size	Surface	Thickness
600x600mm	**Matt**	**12mm**

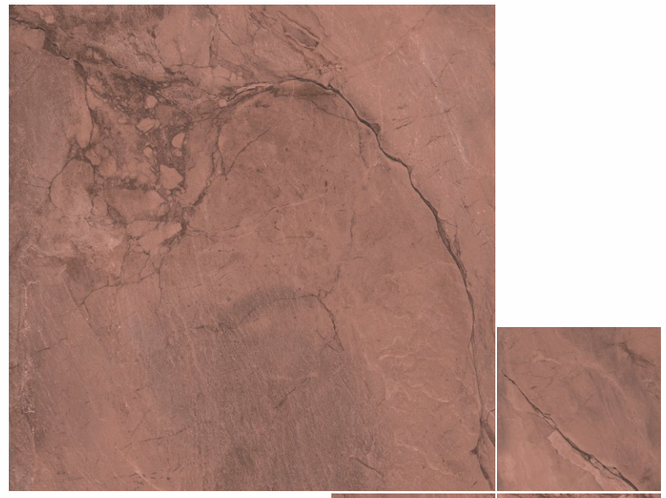

ROCKSTONE
ELAMAR TERRACOTTA MT
Faces: **8**

Size	Surface	Thickness
600x600mm	**Matt**	**12mm**



ROCKSTONE COLLECTION

Tile Shown: **ROCKSTONE CAJA OXIDO RT**

Size	Surface	Thickness
600x600mm	Rustic	12mm

Scan for a virtual view





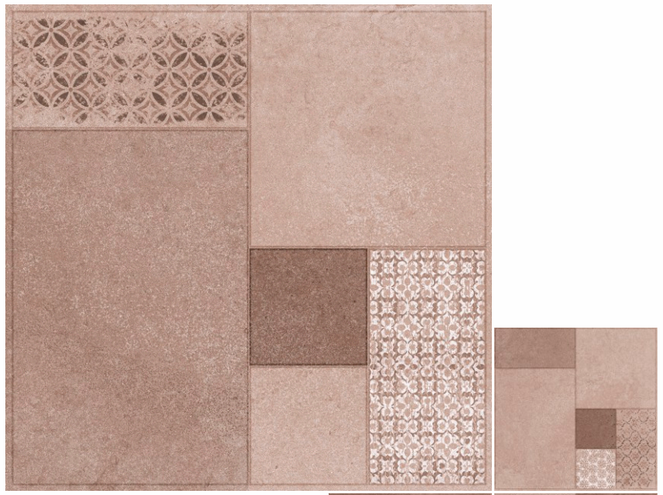

ROCKSTONE
CAJA ALMOND RT
Faces: **4**

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**





ROCKSTONE
CAJA KHAKI RT
Faces: **4**

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**



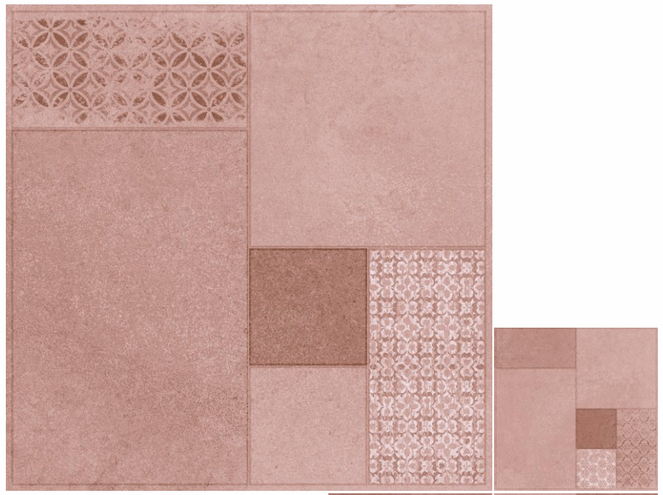

ROCKSTONE
CAJA TAWNY RT
Faces: **4**

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**





ROCKSTONE
CAJA OXIDO RT
Faces: **2**

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**



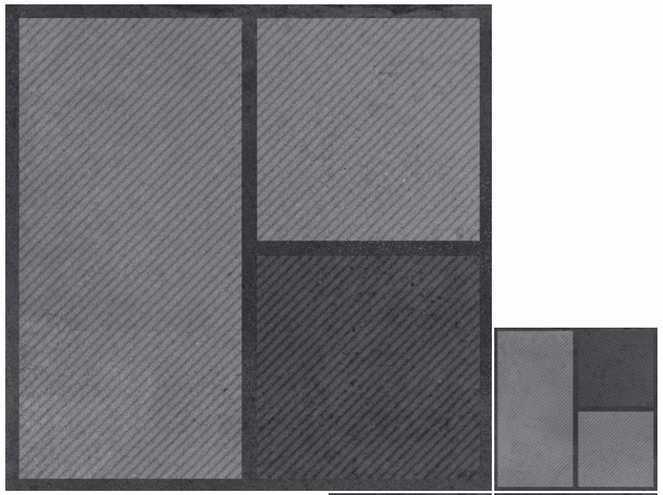

ROCKSTONE
FILA ANCHOR RT
Faces: **2**

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**

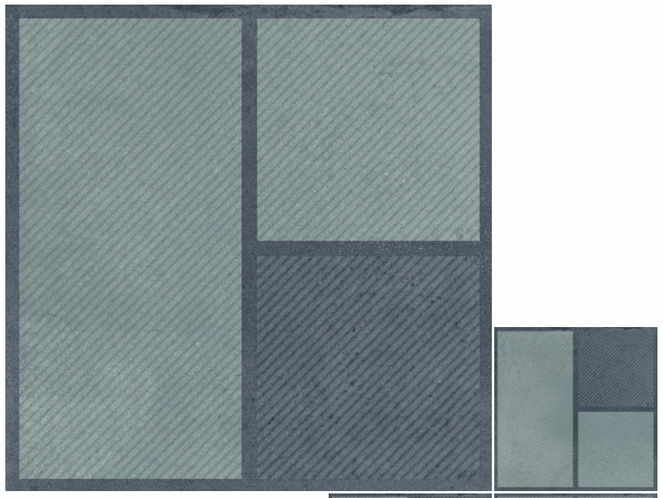

ROCKSTONE
FILA SEA RT
Faces: **2**

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**



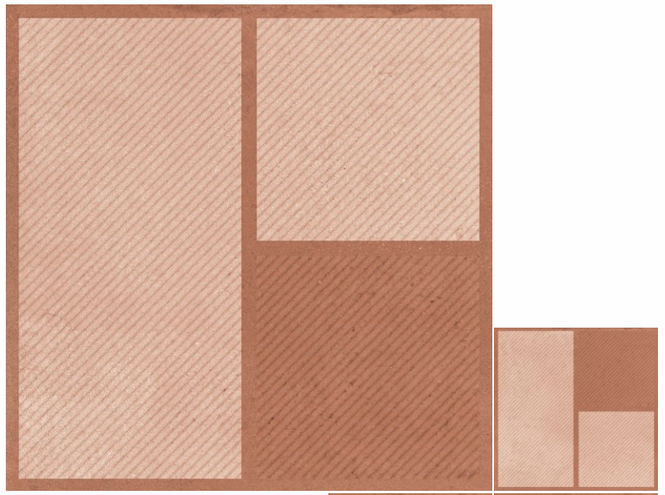

ROCKSTONE
FILA BRONZE RT
Faces: **2**

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**

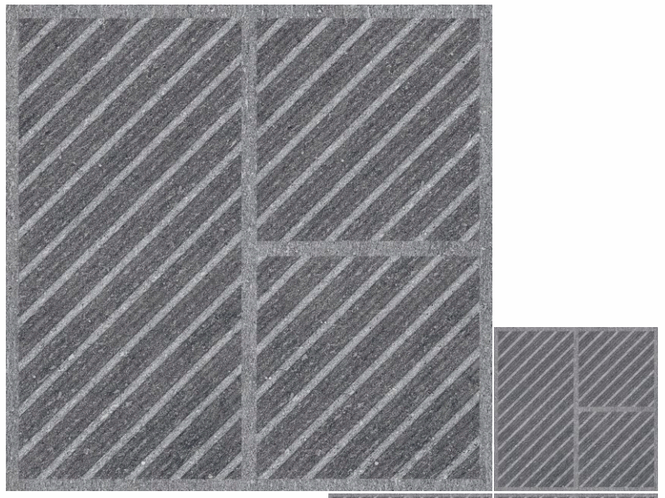

ROCKSTONE
FILA IRON RT
Faces: **1**

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**

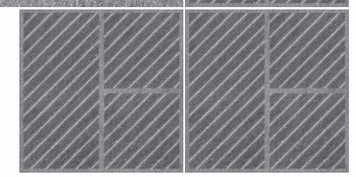

ROCKSTONE COLLECTION

Tile Shown: **ROCKSTONE FILA BEIGE RT**

Size	Surface	Thickness
600x600mm	Rustic	12mm

Scan for a virtual view





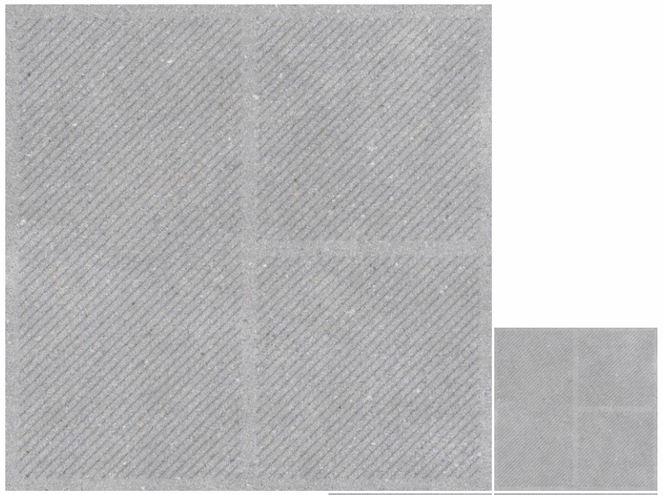

ROCKSTONE
FILA RHINO RT
Faces: **1**

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**

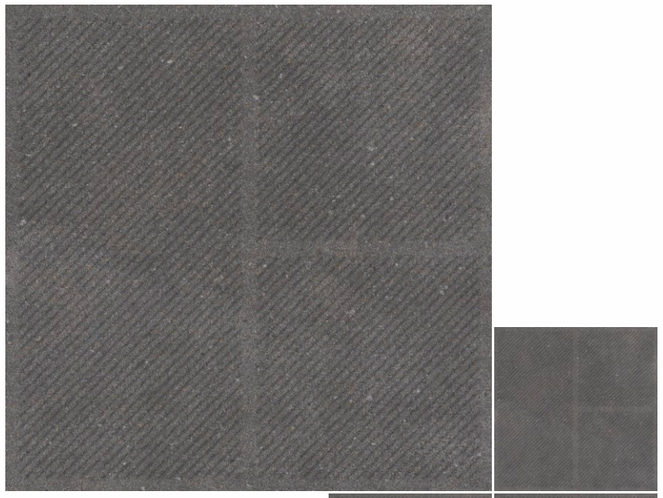

ROCKSTONE
FILA ASH RT
Faces: **1**

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**



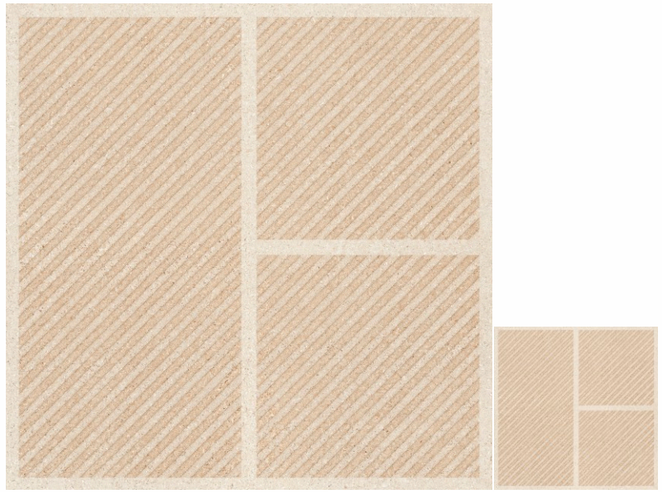

ROCKSTONE
FILA BEIGE RT
Faces: **1**

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**

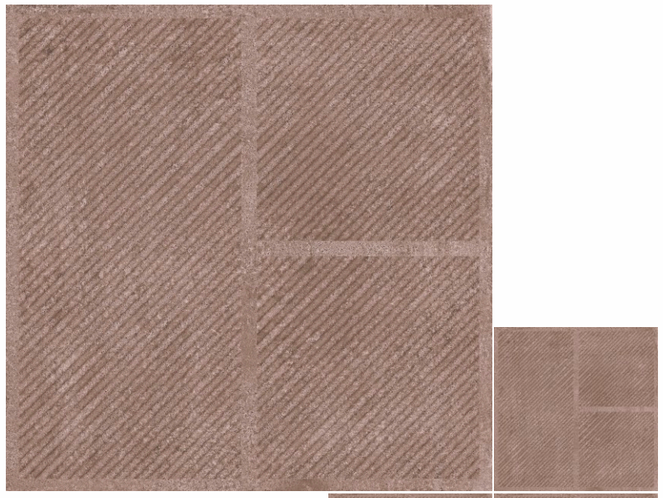

ROCKSTONE
FILA TAWNY RT
Faces: **1**

Size **600x600mm** | Surface **Rustic** | Thickness **12mm**





ROCKSTONE
FILA NATIVO RT
Faces: **4**

Size	Surface	Thickness
600x600mm	**Rustic**	**12mm**



ROCKSTONE
PETRA SEAL RT
Faces: **4**

Size	Surface	Thickness
600x600mm	**Rustic**	**12mm**



ROCKSTONE
PETRA BROWN RT
Faces: **4**

Size	Surface	Thickness
600x600mm	**Rustic**	**12mm**



ROCKSTONE
PETRA RUSSET RT
Faces: **4**

Size	Surface	Thickness
600x600mm	**Rustic**	**12mm**

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.

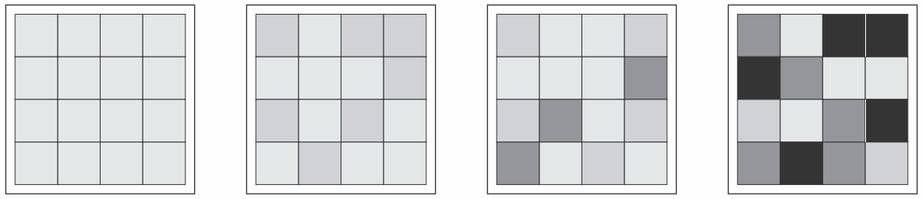

V1 Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation V3 Moderate Variation V4 Substantial Variation

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR ROCKSTONE COLLECTION				
Nominal Size (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
600x600mm	12mm	28.5 kg.	3	1.08 Sq. mtr / 11.62 Sq. ft.

TECHNICAL SPECIFICATION FOR ROCKSTONE COLLECTION				
Characteristics	Requirement as per IS 15622:2017 <E≤0.08 Group BIa	Requirement as per ISO 13006 ≤ 0.5% Group BIa	Our Value	Test Method
(A) Dimension & Surface Quality				IS 13630 Part 1 / ISO 10545-2
I) Length & Width	±0.1%	± 0.3%	±0.1%	
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	±0.1%	± 0.3%	± 0.1%	
iv) Rectangularity	±0.1%	± 0.3%	± 0.1%	
v) Surface Flatness				
a) Center Curvature (%) (Max. Deviation)	± 0.5 %	± 0.4%	±0.2%	
b) Edge Curvature (%) (Max. Deviation)	± 0.5 %	± 0.4%	±0.2%	
c) Corner Warpage (%) (Max. Deviation)	± 0.5 %	± 0.4%	±0.2%	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	95 % of tiles will be free from visible defects	95 % of tiles will be free from visible defects	
B) Physical Properties				
I) Water Absorption	Avg. E ≤ 0.08% , Individual 0.1 Max	Avg. ≤ 0.5% , Individual 0.6% Max	Avg. E ≤ 0.08%	IS 13630 Part 2 / ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Avg. 35 , Individual 32 min	Avg. 35 , Individual 32 min	Avg. 35 , Individual 32 Min	IS 13630 Part 6 / ISO 10545-4
iii) Breaking Strength in N	Min. 1300	Min. 1300	Min. 1800	
iv) Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3 / ISO-10545-10
v) Scratch Hardness of Surface (Mohs)	Min. 5	N/A	Min 5 (For VC & RT) Min 3 (For Polished)	IS 13630 Part 13
vi) Resistant to Abrasion of Glazed Tiles (Class I to V)	Min. II	Abrasion Class & Cycle Passed	Class V (For VC & RT) Class III (For Polished)	IS 13630 Part 11 / ISO 10545-7
vii) Coefficient of Linear Thermal Expansion from Ambient Temperature to 100°C	6X $10^{-6}K^{-1}$ Max.	Test Method Available	6X 10^{-6} K^{-1} Max.	IS 13630 Part 4 / ISO 10545-8
Viii) Thermal Resistant	10 Cycle Min.	Test Method Available	10 Cycle Passed	IS 13630 Part 5 / ISO-10545-9
ix) Crazing Resistant	4 Cycle @ 7.5bar Min.	Required	4 Cycle Passed	IS 13630 Part 9 / ISO 10545-11
x) Impact Resistant as Coefficient of Restitution (COR)	0.55 Min.	Required	Min. 0.55	ISO 10545-5
xi) Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10 / ISO-10545-12
C) Chemical Resistant (Glazed Tiles)				
I) Stain Resistant	Min. Class 1	Min. Class 3	Min. Class 1 (For Matt) Min. Class 2 (For Polished)	IS 13630 Part 8 / ISO 10545-14
ii) Resistant to Household Chemicals	Min. Class AA	Min. Class GB	Min. Class AA	IS 13630 Part 8 / ISO 10545-13
iii) Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if Agreed	Declared Value[f]	Min. Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE

TILE VISUALISER

SOMANY

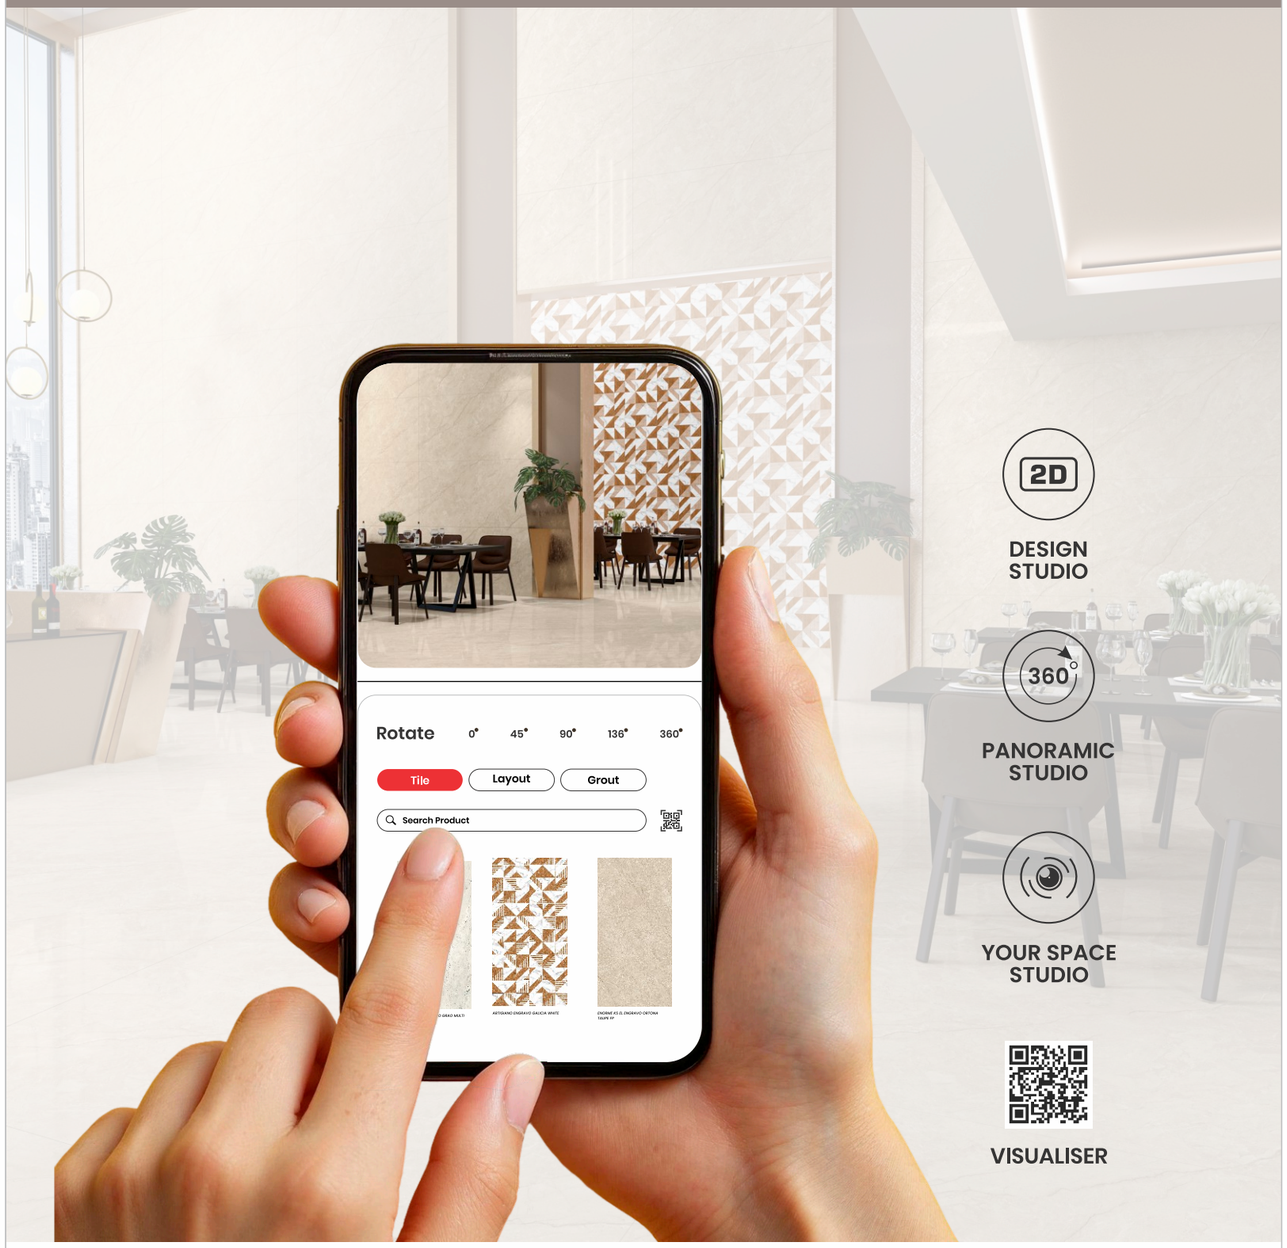

Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at **www.somanyceramics.com** or call on **Toll Free: 1800 103 0004**

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome

Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com