



DURAGRES

SOMANY
TILES | BATHWARE

SLIMKER COLLECTION

6 MM
Thickness

600x1200mm



SOMANY
TILES | BATHWARE

Somany Ceramics Limited

Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph.: 0120-4627900

Ahmedabad Office: 601 to 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad-382481; Ph.: 079-27661103 & 04

Registered Office: 2, Red Cross Place, Kolkata-700001; Ph.: 033-22487406/5913

www.somanyceramics.com | e-mail: customer.care@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00 am to 6:30 pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Visit us at:
www.facebook.com/SomanyCeramic



Visit us at:
www.x.com/SomanyCeramic



Visit us at:
www.instagram.com/SomanyCeramics



DURAGRES / CAT / DECEMBER - 2024

UNIT - 4 | FOR SOUTH ONLY

DURAGRES

SLIMKER COLLECTION

Experience the epitome of modern design with Somany's exquisite tile ranges, Slimker. The Slimker series offers a sleek, 6 mm slim masterpiece that combines exquisite design with unparalleled strength, making it a delight for both walls and easy installation. Transform your home into a picturesque abode with these timeless tiles, crafted to perfection for those who seek the best in both style and substance.

CRAFT YOUR SPACE WITH TIMELESS TILES



BENDING AND
BREAKING
STRENGTH RESISTANT



FROST
RESISTANT



WATER
ABSORPTION
RESISTANT



SATIN
RESISTANT



NO DISCOLOURING
WITH EXPOSURE
TO LIGHT



THERMAL
SHOCK
RESISTANT



SLIP
RESISTANCE



SALT
RESISTANT



EASIER
TO LAY

TABLE OF CONTENT



FULL POLISH

06

Page No.

600x
1200mm



MATT CARVING

10

Page No.

600x
1200mm



[Application Approach Area]



SURFACE FOR EVERY AREA

-  RESIDENCES
-  MALLS
-  BATHROOMS
-  HOTELS
-  KITCHENS
-  AIRPORTS
-  OFFICES
-  RESTAURANTS
-  RAILWAY STATIONS
-  SHOPS



THE PERFECT MATCH FOR YOUR SPACE

Reflect the shine with Full Polish or embrace the subtle texture with Matt Carving.

DURAGRES
SLIMKER



GRANDE SLIMKER IMP UBIK GREY


600x1200MM

6 MM
Thickness

06

07

DURAGRES
SLIMKER

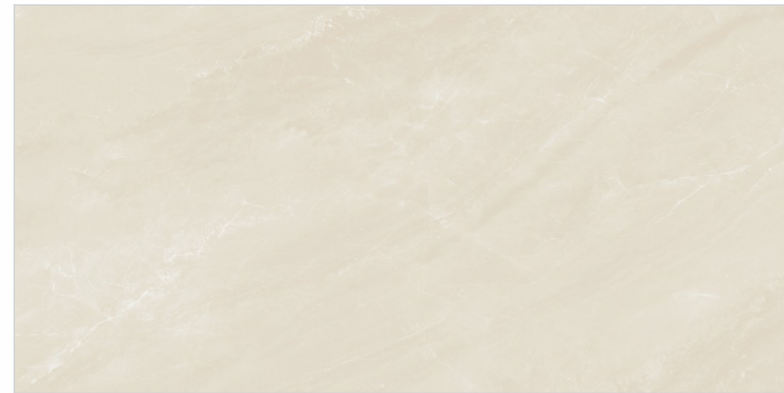

GRANDE SLIMKER CITRINE BEIGE FP

V6



GRANDE SLIMKER CITRINE BEIGE DECOR FP

V2




GRANDE SLIMKER CITRINE BROWN FP

V6




GRANDE SLIMKER GABBRO DECOR FP

V1

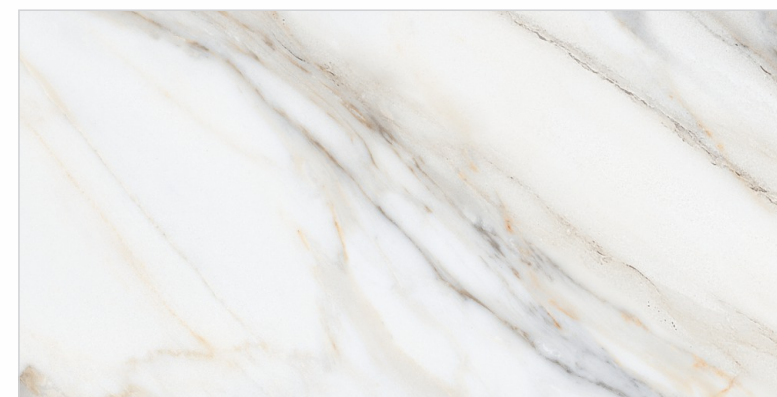

GRANDE SLIMKER GABBRO FP

V2

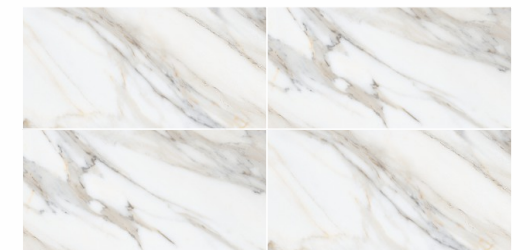

SLIMKER
COLLECTION

6 MM Thickness 600x1200mm MATT / MATT CARVING




GRANDE SLIMKER IMP MAZIE BEIGE

V4



GRANDE SLIMKER IMP MAZIE DECOR

V4

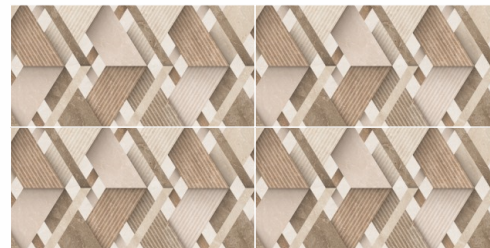


GRANDE SLIMKER IMP MAZIE BRONZE

V4



- 
VERSATILE SOLUTIONS
- 
EASIER TO LAY
- 
RESISTANT TO CHEMICAL
- 
RESISTANT TO LOADS
- 
RESISTANT TO STAINS

DURAGRES
SLIMKER

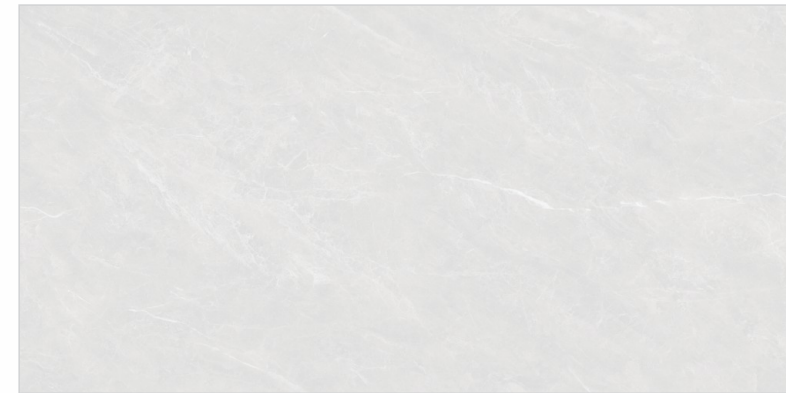

GRANDE SLIMKER IMP UBIK GREY LIGHT

V4



GRANDE SLIMKER IMP UBIK GREY DECOR

V3




GRANDE SLIMKER IMP UBIK GREY DARK

V4




6 MM
Thickness **600x1200mm**
MATT / MATT CARVING

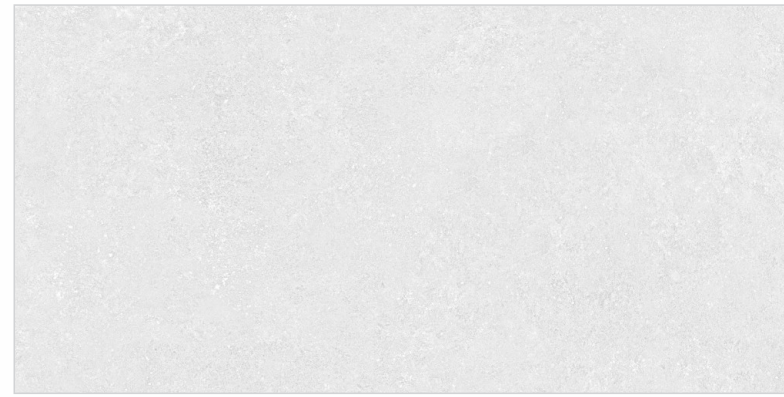

GRANDE SLIMKER GRANITA GREY LIGHT

V4

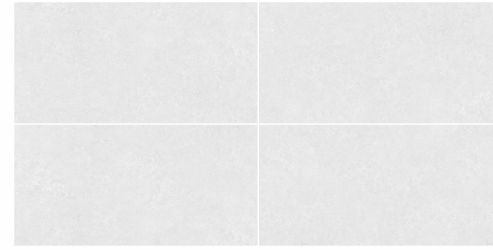


GRANDE SLIMKER IMP GRANITA GREY DÉCOR

V4





GRANDE SLIMKER GRANITA GREY DARK

V4

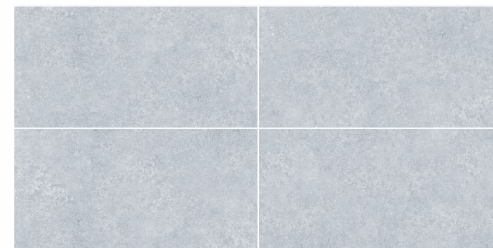


GRANDE SLIMKER SEZANE GREY LIGHT

V2

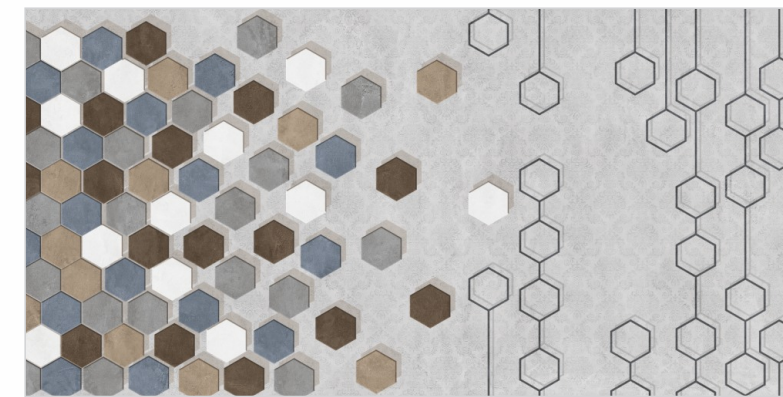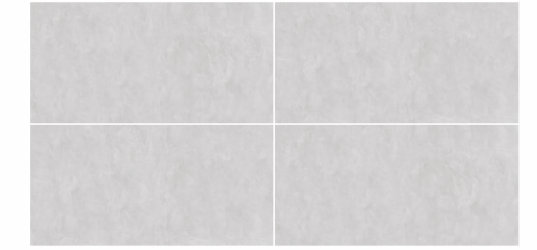


GRANDE SLIMKER IMP SEZANE GREY DECOR

V1

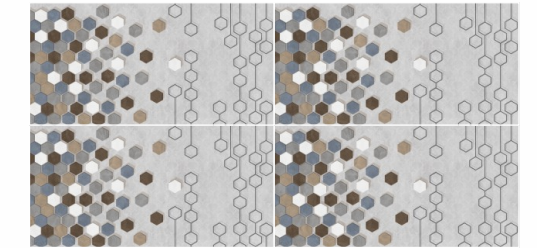

GRANDE SLIMKER SEZANE GREY DARK

V2

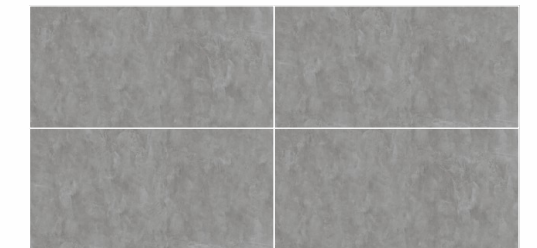



GRANDE SLIMKER BOVET

600x1200MM  6MM
Thickness

14

15

DURAGRES
SLIMKER

6 MM
Thickness **600x1200mm**
MATT / MATT CARVING




GRANDE SLIMKER BOVET BEIGE

V2




GRANDE SLIMKER IMP BOVET DECOR

V1

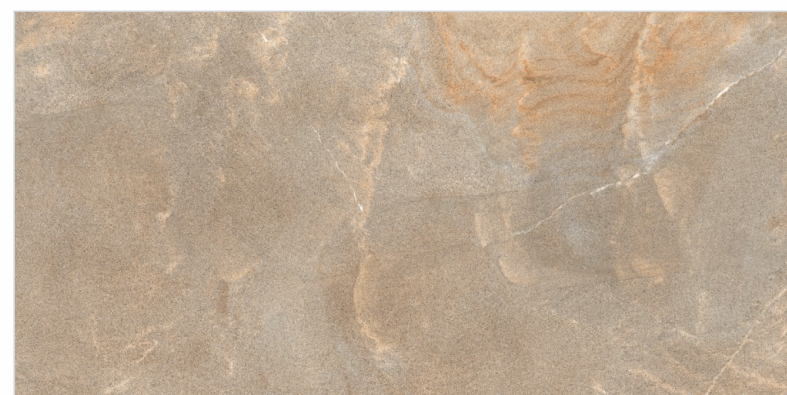

GRANDE SLIMKER BOVET BROWN

V2

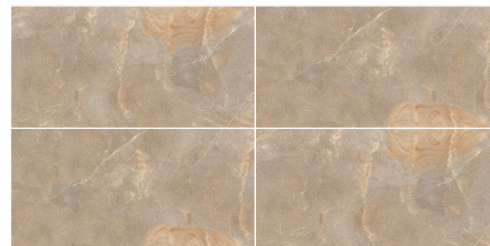

- 
VERSATILE SOLUTIONS
- 
EASIER TO LAY
- 
RESISTANT TO CHEMICAL
- 
RESISTANT TO LOADS
- 
RESISTANT TO STAINS




GRANDE SLIMKER CELINE BEIGE

V2



GRANDE SLIMKER IMP CELINE DECOR

V1

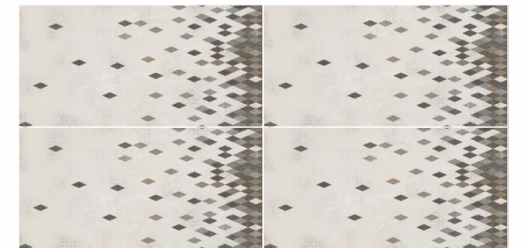


GRANDE SLIMKER CELINE BROWN

V2



SLIMKER
COLLECTION

6 MM Thickness 600x1200mm MATT / MATT CARVING

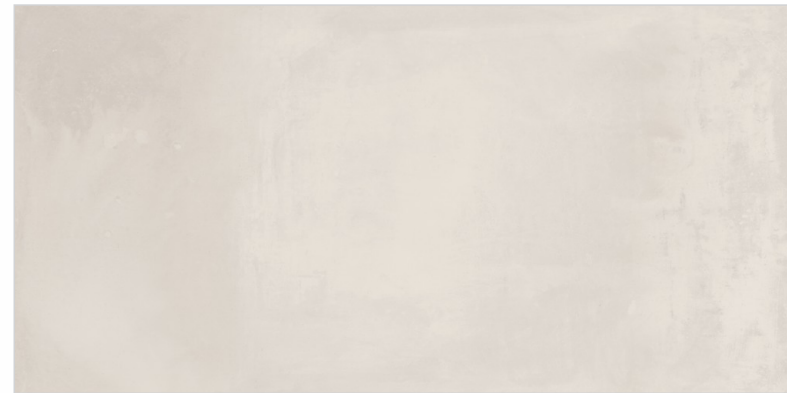


GRANDE SLIMKER VIVIER BEIGE

V2



GRANDE SLIMKER IMP VIVIER DECOR

V1

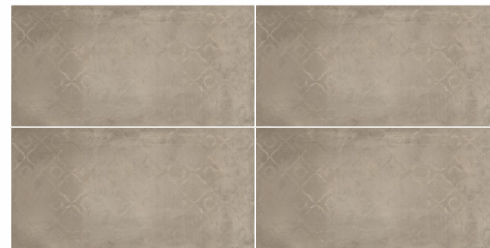

GRANDE SLIMKER VIVIER BROWN

V2



- 
VERSATILE SOLUTIONS
- 
EASIER TO LAY
- 
RESISTANT TO CHEMICAL
- 
RESISTANT TO LOADS
- 
RESISTANT TO STAINS

DURAGRES
SLIMKER





GRANDE SLIMKER ORIS GREY LIGHT

V2




GRANDE SLIMKER ORIS GREY DECOR

V1

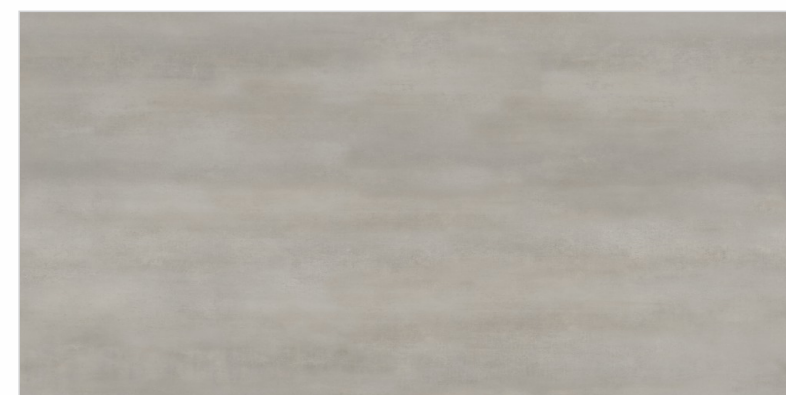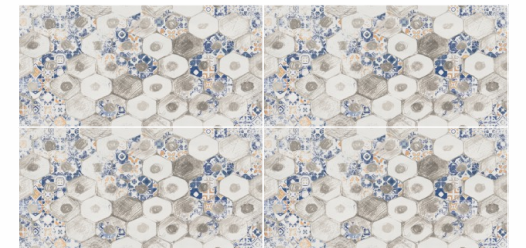

GRANDE SLIMKER ORIS GREY DARK


V2

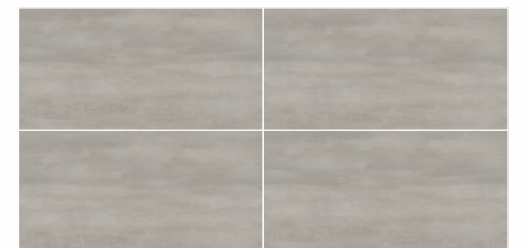

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.

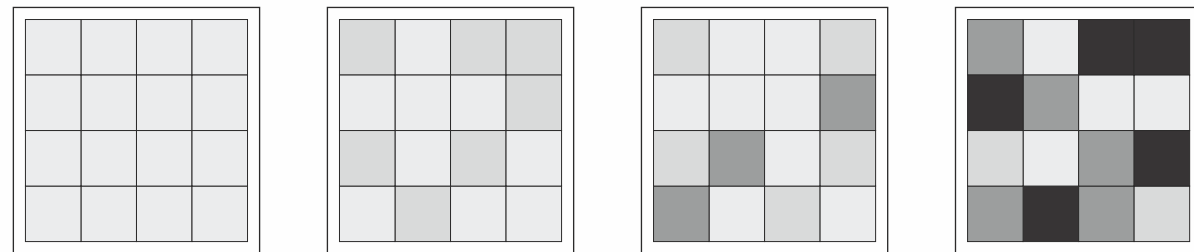

V1 Uniform Appearance **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follow:

V1 Minimal Variation **V2** Slight Variation **V3** Random Variation **V4** Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles.

For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder. And use with spacer to look good

PACKING DETAIL FOR 600X1200MM GLAZED VITRIFIED TILES

Nominal Size	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton
600 x 1200mm	6.00 mm	19.5	2	1.44sq.mtr./15.50sq.ft.


TECHNICAL SPECIFICATION FOR 600X1200MM GLAZED VITRIFIED TILES

Characteristics	Requirement as per IS 15622 :2017 E ≤ 0.08 Group Bla	Requirement as per ISO 13006 ≤ 0.5% Group Bla	Our Values	Test Method
A) Dimension & Surface Quality				
i) Length & Width	± 0.1 %	± 0.3 %	± 0.1 %	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0 %	± 5.0%	± 4.0%	
iii) Straightness of Side	± 0.1 %	± 0.3 %	± 0.1 %	
iv) Rectangularity	± 0.1 %	± 0.3 %	± 0.1 %	
v) Surface Flatness				
a) Center curvature (max.Deviation)	± 0.5 %	± 0.4 %	± 0.2 %	
b) Edge curvature (max.Deviation)	± 0.5 %	± 0.4 %	± 0.2 %	
c) Corner warpage (max.Deviation)	± 0.5 %	± 0.4 %	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Av ≤ 0.08%, Individual 0.1 Max	Av ≤ 0.5 %, Individual 0.6% max	Av E≤ 0.08 %	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm ²]	Av 35, Individual 32 Min	Av 35, Individual 32 Min	Avg. 35, Individual 32	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	700 N	700 N	700 N	
iv) Moisture Expansion in mm/m	0.02	Test method available	0.02	IS 13630 Part 3/ISO-10545-10
v) Scratch Hardness of surface (Mohs)	Min 5	N.A	Min.5 (for VC & RT), Min.3 (for Polished)	IS 13630 Part 13
vi) Resistance to Abrasion of glazed tiles(Class I to V)	Min II	Abrasion Class & Cycle passed	Class-V(for VC & RT), Class-III(for Polished)	IS 13630 Part 11 /ISO 10545-7
vii) Coefficient of linear thermal expansion from embiant temperature to 100° C	6 X 10 ⁻⁶ K ⁻¹ max	Test method available	6 X 10 ⁻⁶ K ⁻¹ max	IS 13630 Part 4/ ISO 10545-8
viii) Thermal Shock Resistance	10 cycle Min	Test method available	10 cycle passed	IS 13630 Part 5/ISO-10545-9
ix) Craziing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
x) Impact Resistance as Co-efficient of Restitution (COR)	0.55 min	Required	0.55 Min	IS 13630 Part 14/ISO 10545-5
xi) Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistance (glazed Tiles)				
i) Stain Resistance	Min Class 1	Min Class 3	Min Class-1(For Matt), Min Class-2(for Polished)	IS 13630 Part 8 &ISO 10545-14
ii) Resistance to household chemicals	Min Class AA	Min Class GB	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value'	Min Class AA	

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixd. Complaints will not be entertained for Borders, Highlighters & Motifs.



Faucet : Diamante SLBM Wall Mounted Brushed Gold | Shower Column : Diamante Brushed Gold | Basin : Gloster Art Basin Matt Black
 Tiles used - Wall & Floor : Raffino Crema 180 FP | Shower Wall : Breccia Crema PRO 180 FP | Basin Platform : Italmarmi Naples Oscuro Lucido

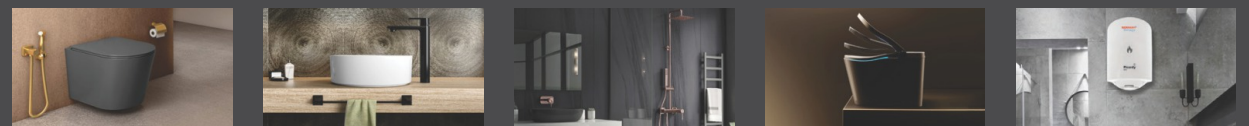

Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com

RECOMMENDED FOR LARGE FORMAT TILES & SLABS



INDIAS FASTEST GROWING ADHESIVE BRAND

