



Power of Desire



SOMANY

Somany Ceramics Limited : Noida: F-36, Sector-6; Ph.:0120-4627900.
Ahmedabad: Office no. 7-14, 4th Floor, Aggarwal Mall, Opp. Sola Bhagwat Vidyapeeth, S.G. Road, Sola, Ph.: 079-66042500 to 599
Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.:(033) 22487406/5913
www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic



Find us at:
www.twitter.com/SomanyCeramic



Find us at:
www.instagram.com/SomanyCeramics



DURAGRES / CAT / FEBRUARY 2022

DURAGRES
Timeless Elegance

SOMANY
Tiles | Bathware

ZAMEEN SE JUDEY

NEW
ARRIVAL

COLOUR BODY


GLAZED VITRIFIED TILES



UNIT-3
FOR ALL INDIA

600x1200MM

GRANDE CB ENGRAVE CORINTO CREMA
RUSTIC CARVING
600x1200mm



COLOUR BODY



UV & HEAT
RESISTANT



STAIN
RESISTANT



SCRATCH &
ABRASION
RESISTANT



WATER
RESISTANT



CHEMICAL
RESISTANT



HYGIENIC
SURFACE



DIMENSIONAL
STABILITY



FROST
RESISTANT

600x1200MM

COLOUR BODY TILES / CARVING | RUSTIC PUNCH




DURAGRES
TESORO



GRANDE CB ENGRAVE CORINTO BIANCO
RUSTIC CARVING, 600x1200mm



GRANDE CB ENGRAVE CORINTO GREY
RUSTIC CARVING, 600x1200mm

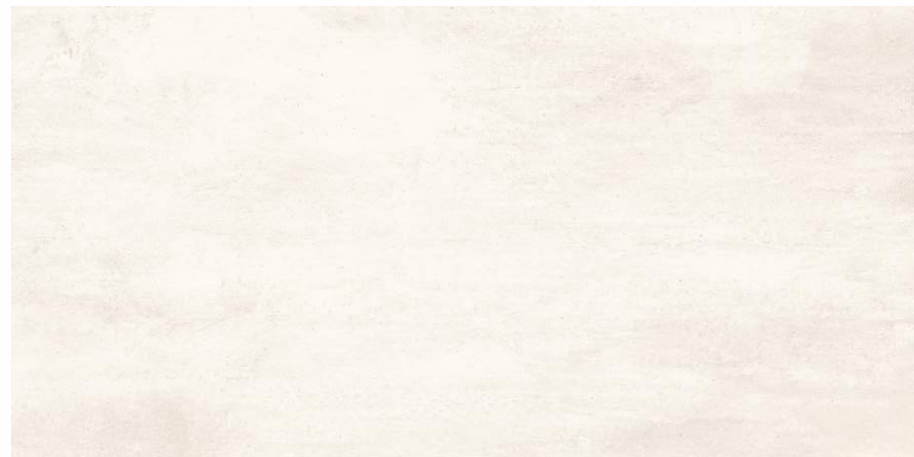

GRANDE CB ENGRAVE CORINTO CREMA
RUSTIC CARVING, 600x1200mm



GRANDE CB ENGRAVE CORINTO CHARCOAL
RUSTIC CARVING, 600x1200mm





GRANDE CB ENGRAVE CORINTO BEIGE
RUSTIC CARVING, 600x1200mm



GRANDE CB ENGRAVE CORINTO BRUNO
RUSTIC CARVING, 600x1200mm



GRANDE CB ENGRAVE KIOTO BRUNO
RUSTIC CARVING
600x1200mm

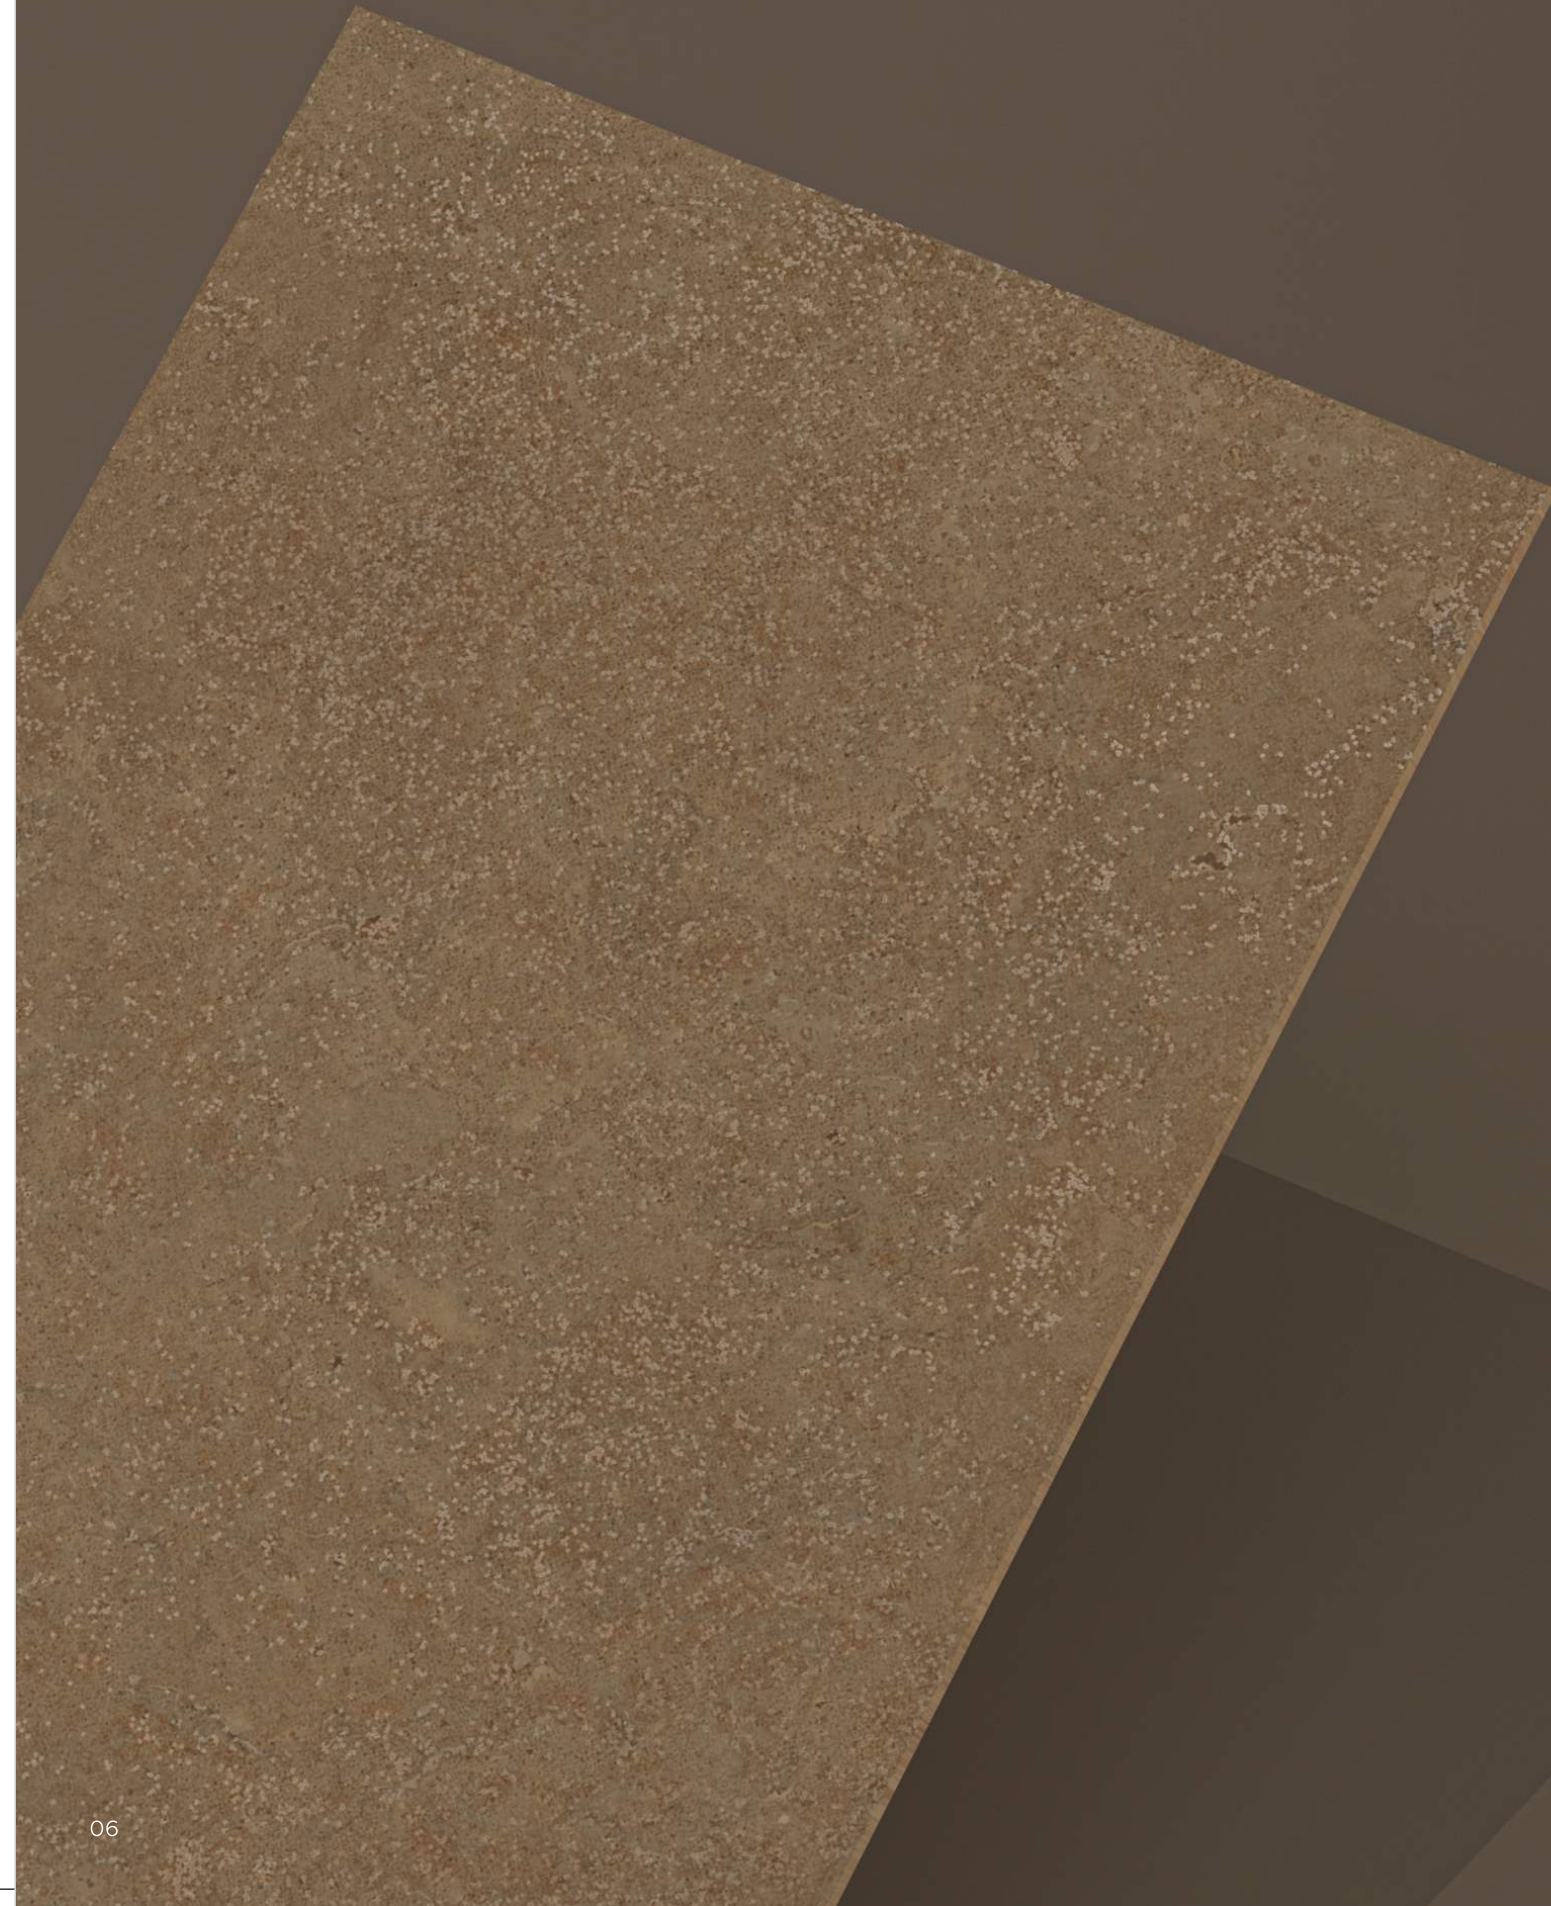

COLOUR BODY



UV & HEAT
RESISTANT



STAIN
RESISTANT



SCRATCH &
ABRASION
RESISTANT



WATER
RESISTANT



CHEMICAL
RESISTANT



HYGIENIC
SURFACE



DIMENSIONAL
STABILITY



FROST
RESISTANT

600x1200MM

COLOUR BODY TILES / CARVING | RUSTIC PUNCH



DURAGRES
TESORO



GRANDE CB ENGRAVE KIOTO BIANCO
RUSTIC CARVING, 600x1200mm



GRANDE CB ENGRAVE KIOTO GREY
RUSTIC CARVING, 600x1200mm



GRANDE CB ENGRAVE KIOTO CREMA
RUSTIC CARVING, 600x1200mm



GRANDE CB ENGRAVE KIOTO NERO
RUSTIC CARVING, 600x1200mm




GRANDE CB ENGRAVE KIOTO BEIGE
RUSTIC CARVING, 600x1200mm



GRANDE CB ENGRAVE KIOTO BRUNO
RUSTIC CARVING, 600x1200mm



GRANDE CB ENGRAVE BRISTOL BIANCO
RUSTIC CARVING
600x1200mm



COLOUR BODY



UV & HEAT
RESISTANT



STAIN
RESISTANT



SCRATCH &
ABRASION
RESISTANT



WATER
RESISTANT



CHEMICAL
RESISTANT



HYGIENIC
SURFACE



DIMENSIONAL
STABILITY



FROST
RESISTANT

600x1200MM

COLOUR BODY TILES / CARVING | RUSTIC PUNCH

RUSTIC PUNCH


DURAGRES
TESORO



GRANDE CB ENGRAVE BRISTOL BIANCO
RUSTIC CARVING, 600x1200mm



GRANDE CB ENGRAVE RYDER WHITE
RUSTIC CARVING, 600x1200mm

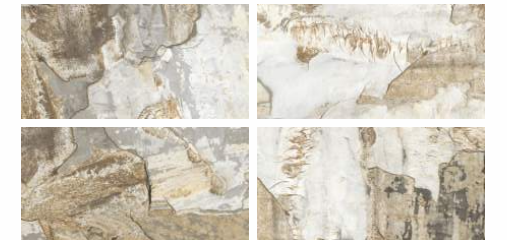


GRANDE CB ROSTER NATURAL
RUSTIC, 600x1200mm



GRANDE CB ROSTER GREY
RUSTIC, 600x1200mm



GRANDE CB KINGSTONE GREY
RUSTIC
600x1200mm



COLOUR BODY



UV & HEAT
RESISTANT



STAIN
RESISTANT



SCRATCH &
ABRASION
RESISTANT



WATER
RESISTANT



CHEMICAL
RESISTANT



HYGIENIC
SURFACE



DIMENSIONAL
STABILITY




FROST
RESISTANT

600x1200MM

COLOUR BODY TILES / RUSTIC



DURAGRES
TESORO

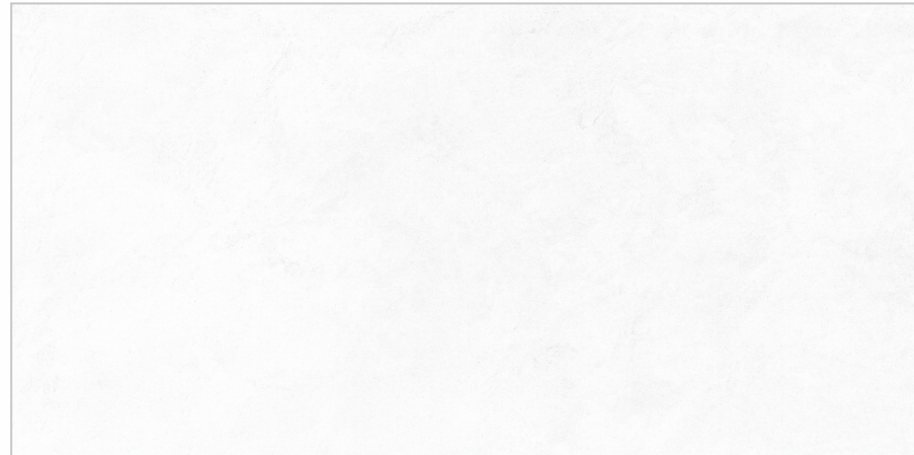

GRANDE CB KINGSTONE BIANCO
RUSTIC, 600x1200mm




GRANDE CB KINGSTONE CREMA
RUSTIC, 600x1200mm



GRANDE CB KINGSTONE BRUNO
RUSTIC, 600x1200mm



GRANDE CB KINGSTONE GREY
RUSTIC, 600x1200mm

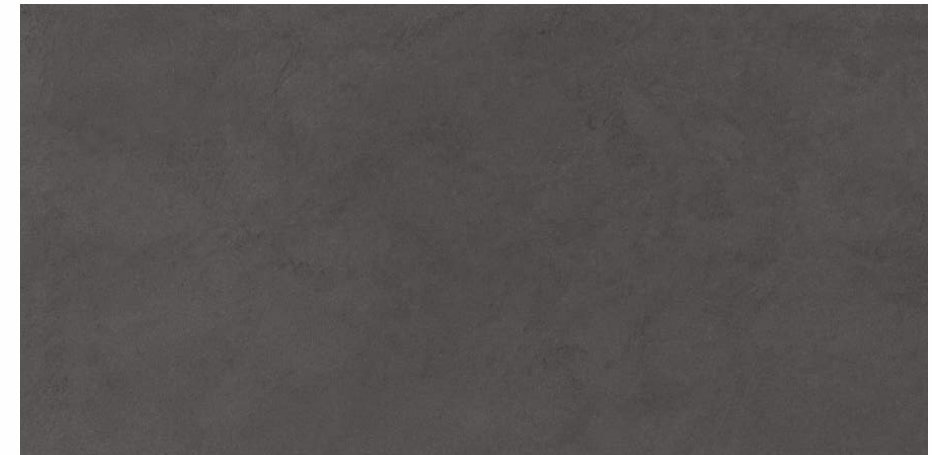

GRANDE CB KINGSTONE ANTRACITA
RUSTIC, 600x1200mm



GRANDE CB KINGSTONE CHOCO
RUSTIC, 600x1200mm






DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.

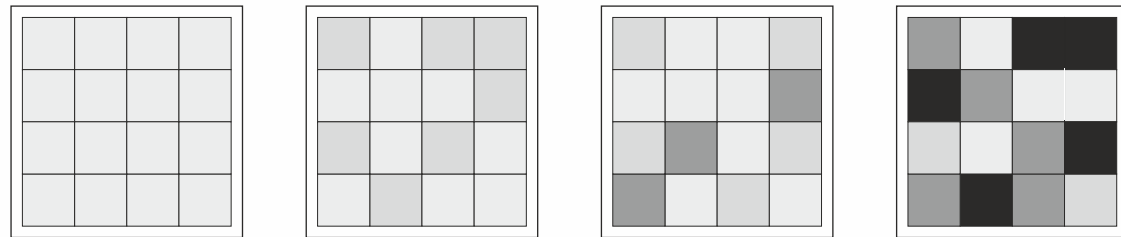

V1 Uniform Appearance **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follow:

V1 Minimal Variation **V3** Random Variation **V2** Slight Variation **V4** Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles.
For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder

Notes

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

PACKING DETAIL FOR 600x1200MM GVT TILES

Nominal Size	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton
600x1200mm	8.8	28.00	2	1.44sq.mtr/15.50sq.ft.

TECHNICAL SPECIFICATION FOR 600x1200MM GVT TILES

Characteristics	Requirement as per IS 15622 : 2017 < E ≤ 0.08 Group Bla	Requirement as per ISO 13006 ≤ 0.5% Group Bla	Our Values	Test Method
A) Dimension & Surface Quality				
I) Length & Width	± 0.1%	± 0.3%	± 0.1%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	± 0.1%	± 0.3%	± 0.1%	
iv) Rectengularity	± 0.1%	± 0.3%	± 0.1%	
v) Surface Flatness				
a) Center curvature (%) (max.Deviation)	± 0.5%	± 0.4%	± 0.2 %	
b) Edge curvature (%) (max.Deviation)	± 0.5%	± 0.4%	± 0.2 %	
c) Corner warpage (%) (max.Deviation)	± 0.5%	± 0.4%	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Av E ≤ 0.08 %, Individual 0.1 max	Av ≤ 0.5 %, Individual 0.6% max	Avg. E ≤ 0.08 %	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Av 35, Individual 32 min	Av 35, Individual 32 min	Avg, 35 Ind 32	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	Min. 1300	Min. 1300	Min. 1300	
iv) Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10
v) Scratch Hardness of surface (Mohs)	Min 5	N/A	Min.5 (for VC & RT), Min.3 (for Polished)	IS 13630 Part 13
vi) Resistance to Abrasion of glazed tiles(Class I to V)	Min II	Abrasion Class & Cycle passed	Class-V (for VC & RT), Class-III (for Polished)	IS 13630 Part 11 /ISO 10545-7
vii) Coefficient of linear thermal expansion from embiant temperature to 100° C	6 X 10 ⁻⁶ K ⁻¹ Max	Test Method Available	Max 6 X 10 ⁻⁶ K ⁻¹ max	IS 13630 Part 4/ ISO 10545-8
viii) Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9
ix) Crazing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
x) Impact Resistance as Co-efficient of Re stitution	0.55 min	Required	Min 0.55	ISO 10545-5
xi) Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistance (glazed Tiles)				
i) Stain Resistance	Min Class 1	Min Class 3	Min Class-1	IS 13630 Part 8 &ISO 10545-14
ii) Resistance to household chemicals	Min Class AA	Min Class GB	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value ¹	Min Class AA	

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.