







Somany Ceramics Limited: Noida: F-36, Sector-6; Ph.: 0120-4627900.

Ahmedabad: 601 to 606, 6th floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad, Gujarat-382481. Ph.: 079-27661103 / 27661104

Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913

www.somanyceramics.com | e-mail marketing@somanyceramics.com

**Toll Free No. 1800-103-0004** (Timing-10:00am to 6:30pm; Mon-Fri)







Find us at: www.facebook.com/SomanyCeramic















## URBANE \_

Just like the name suggests, this one takes the crown of contemporary tile styling with designs that look sophisticated, classy and quite millennial!

### **APPLICATION**



Residences

Shops



Airports



Offices









Kitchens

FEATURES



Frost



KG

Break

















Easy to Clean






Shifting the focus from minimalism to mighty force guaranteed makes for an interior design trend guarnteed to get heads turning. Shifting the focus from minimalism to mighty force guaranteed makes for an interior design trend guarnteed to get heads turning.


### INDEX

Full Polish Endless06Full Polish09Carving27Matt37VC38

1200x 1800MM



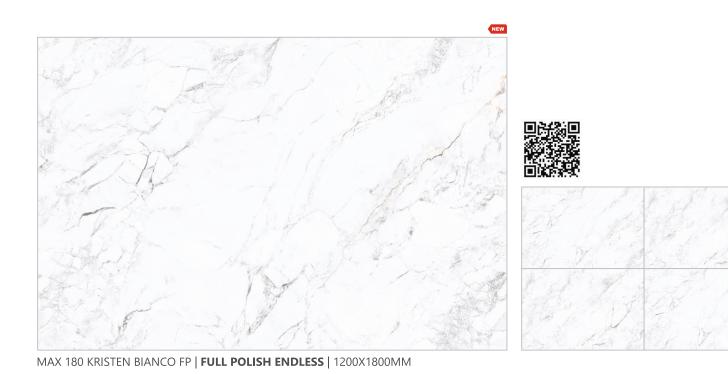


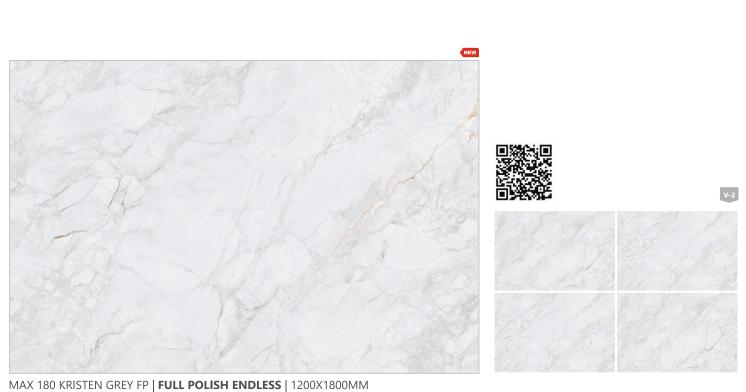





MAX 180 KRISTEN CREMA FP | **FULL POLISH ENDLESS** | 1200X1800MM

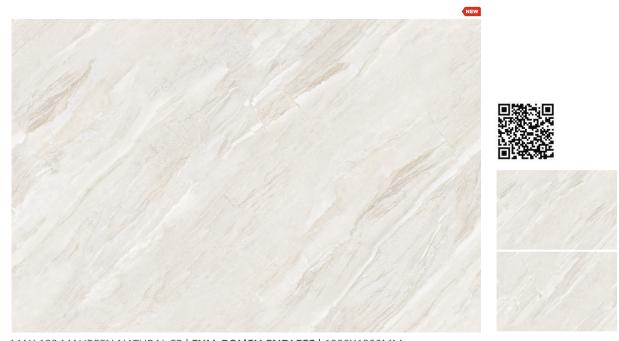

MAX 180 MAUREEN NATURAL FP | FULL POLISH ENDLESS | 1200X1800MM



















MAX 180 MAUREEN GREY FP | FULL POLISH ENDLESS | 1200X1800MM

MAX 180 ANGELA BIANCO FP | FULL POLISH | 1200X1800MM

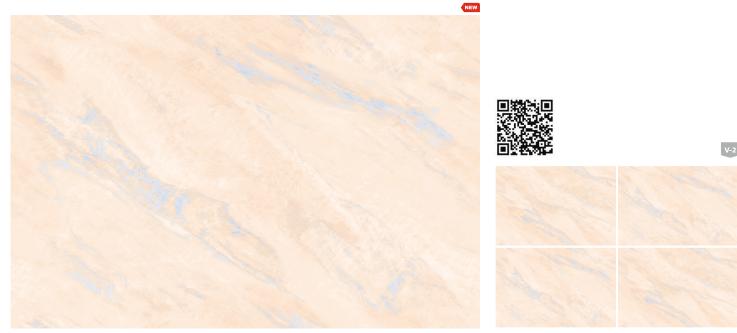



MAX 180 SORAYA BEIGE FP | FULL POLISH ENDLESS | 1200X1800MM MAX 180 AMRONE BEIGE FP | FULL POLISH | 1200X1800MM

## Think Beyond Ordinary.



MAX 180 MAUREEN NATURAL FP



# For Stately Splendor Gratifying Glory

Presenting beautiful shades of Glazed Vitrified Tiles Collection that merges with your spaces so effortlessly creating a picture of complete oneness.

















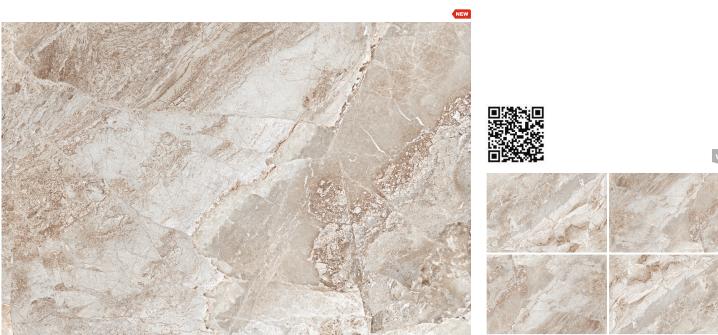



MAX 180 ALTOMIO GREY FP | FULL POLISH | 1200X1800MM



MAX 180 AVA ARMANI GREY FP | FULL POLISH | 1200X1800MM



MAX 180 BRONTE BROWN FP | FULL POLISH | 1200X1800MM




MAX 180 BEVERLY STATUARIO FP | FULL POLISH | 1200X1800MM







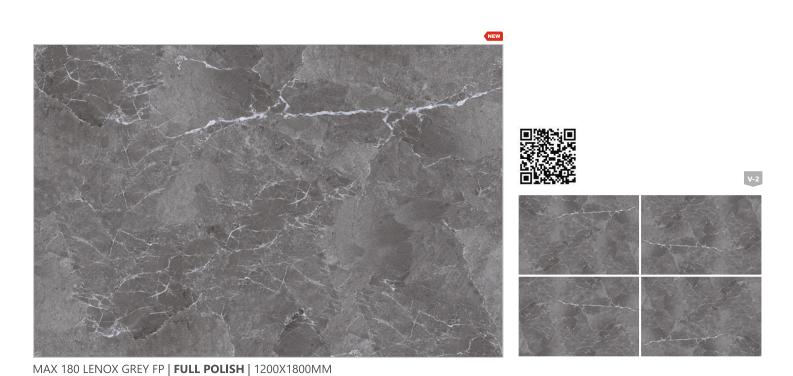



MAX 180 LENOX BEIGE FP | FULL POLISH | 1200X1800MM



MAX 180 LENOX BROWN FP | FULL POLISH | 1200X1800MM

# Tiles that Reflects Royalty



MAX 180 BRONTE BROWN FP



# Tiles that Embody Clegance

Meet the urban wonders that make your space look absolutely royal. The designs of the collection are so majestic that it lends the aura of opulence to ambiance.


















MAX 180 LUCIANA BEIGE FP | FULL POLISH | 1200X1800MM



MAX 180 LUCIANA GREY FP | FULL POLISH | 1200X1800MM

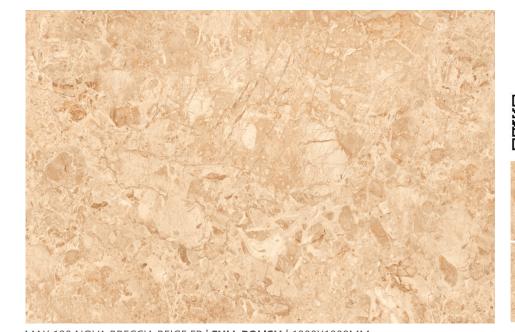


MAX 180 NOVA BRECCIA BEIGE FP | **FULL POLISH** | 1200X1800MM



MAX 180 GLACIER WHITE FP | **FULL POLISH** | 1200X1800MM






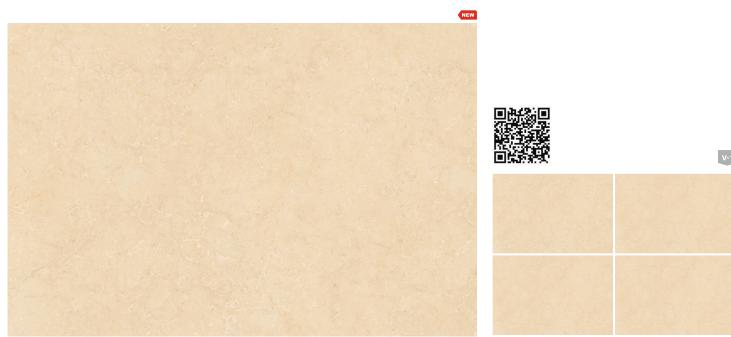


MAX 180 PARISO BEIGE FP | FULL POLISH | 1200X1800MM



MAX 180 PARISO BROWN FP | FULL POLISH | 1200X1800MM

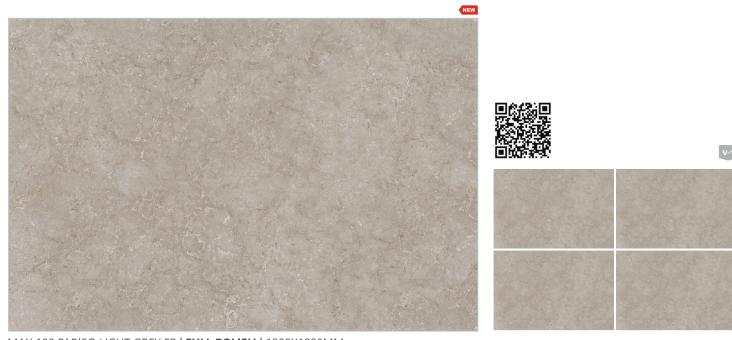

MAX 180 PARISO LIGHT GREY FP | **FULL POLISH** | 1200X1800MM

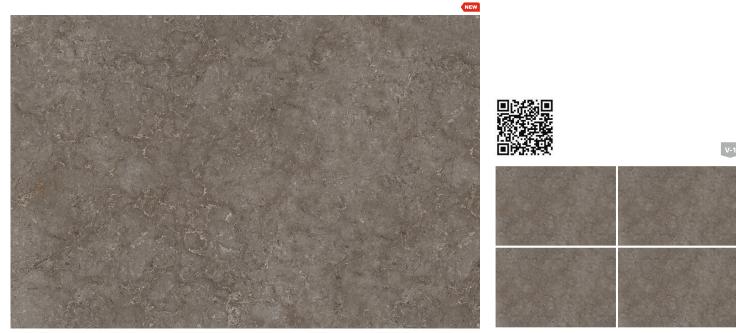

MAX 180 PARISO DARK GREY FP | **FULL POLISH** | 1200X1800MM

# For Stately Splendor Gratifying Glory



MAX 180 UNO BOTTICHINO BEIGE FP



Tiles that add

Presenting the collection where each design is so alluringly beautiful that you will instantly fall under its endless charm.


















MAX 180 PRIME ATLAS CREMA FP | **FULL POLISH** | 1200X1800MM





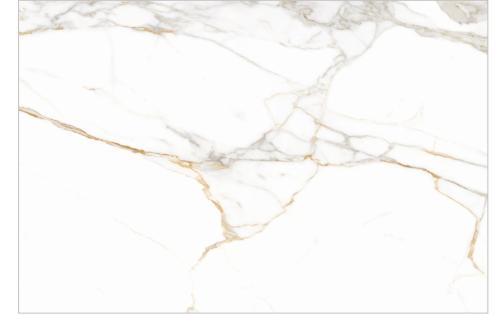

MAX 180 ROMA STATUARIO FP | **FULL POLISH** | 1200X1800MM














V-2

MAX 180 UNO BOTTICHINO BEIGE FP | **FULL POLISH** | 1200X1800MM



MAX 180 IMP ADRIAN BIANCO | **CARVING** | 1200X1800MM

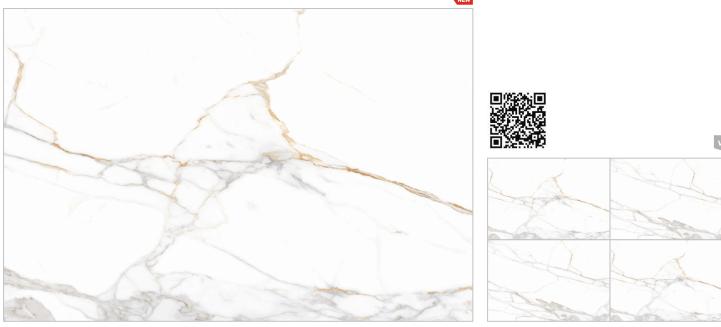

MAX 180 IMP BELGRAVIA STATUARIO | **CARVING** | 1200X1800MM

## Hold the Essence of Solitary



MAX 180 IMP BELGRAVIA STATUARIO




### Elect your Passion

Infuses interior furnishing with a touch of refined eccentricity, thanks to its highly decorative surfaces, where it spreads an extraordinary thread of shapes and stains of color.





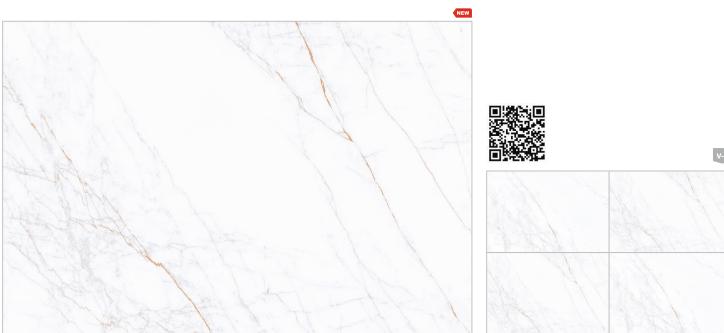










MAX 180 IMP CRELUM AQUA | CARVING | 1200X1800MM


MAX 180 IMP FREDRIC GREY | CARVING | 1200X1800MM





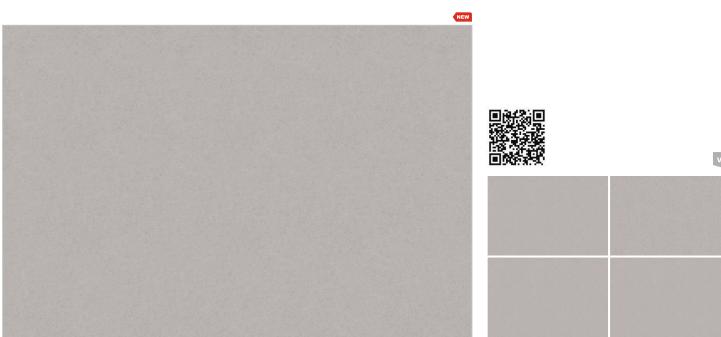



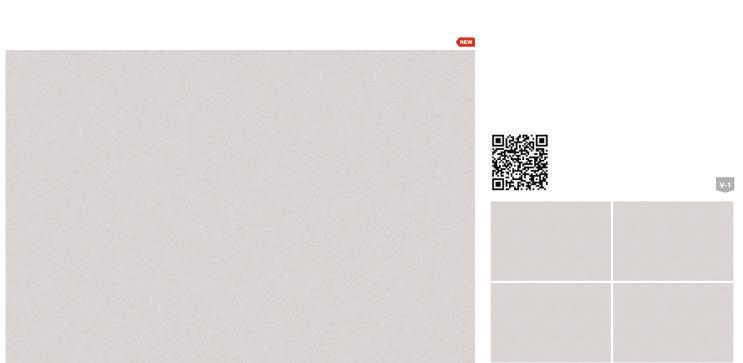

MAX 180 IMP HELIX BIANCO | CARVING | 1200X1800MM









## Design with Confidence



MAX 180 IMP HELIX LIGHT GREY



# Where Quality Meets Style

A delicate graphic that stands out from other Tiles due to its fine veining that varies from light grey to dove grey. A refined material, ideal for interior design



**1200x1800MM** | Carving














MAX 180 IMP MALLORY BEIGE | CARVING | 1200X1800MM




MAX 180 AGATHA DARK GREY | MATT | 1200X1800MM

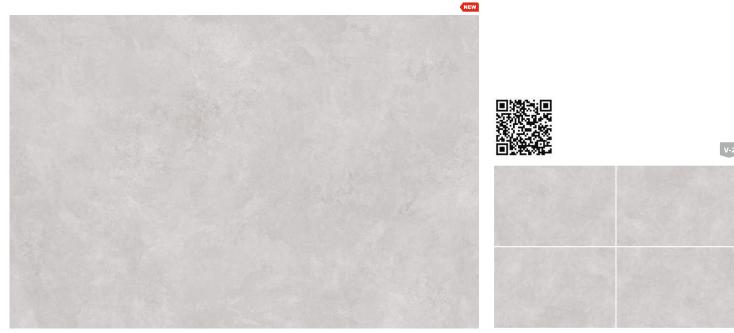

MAX 180 AGATHA LIGHT GREY | MATT | 1200X1800MM





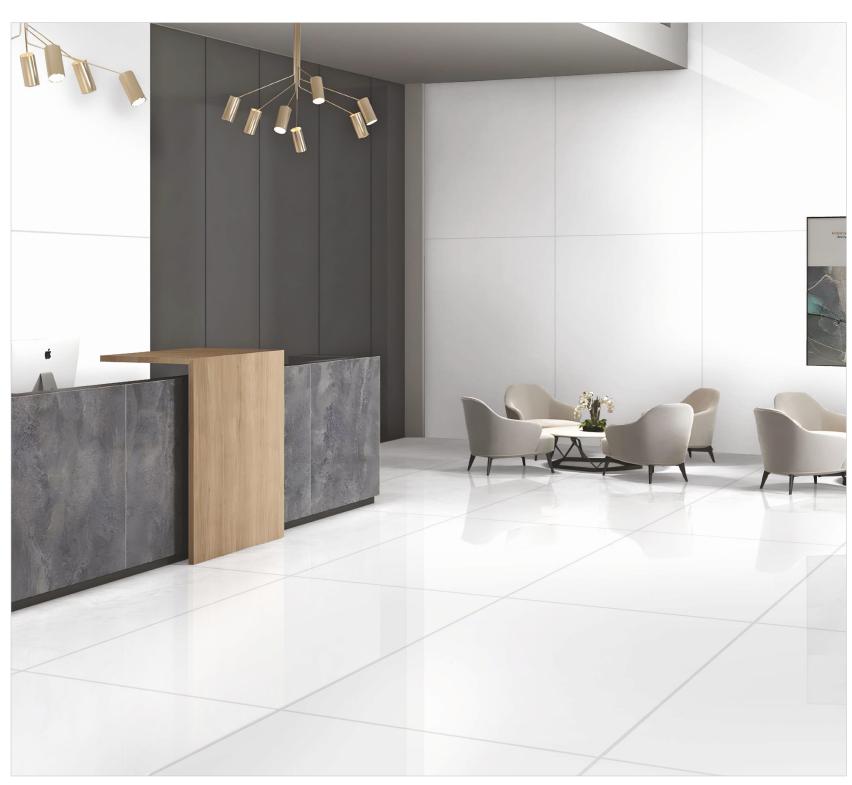

MAX 180 GLAICER WHITE VC



### VEILCRAFT (VC) SHIELD

Not only look and style; the buzz word for the Gen X tile is timeless elegance. Here comes the revolutionary patented "VeilCraft (VC) Shield" technology, a 'high abrasion resistant glaze composition', known as VC (VeilCraft) Shield. This is the first ever patented technology in Indian Ceramic Industry. This not only gives you the perfect aesthetics for your space but also the lifelong protection to your floor.

### Result Of The abrasion test at 25,000 revolutions as per the PEI Methodology



Natural Granite









Marble

VC Shield Tile

Polished Vitrified Tile

Patent Certificate for "High Abrasion Resistant Glaze" applied on VC Shield Tiles



### **TECHNICAL SPECIFICATION**




PACKING DETAILS FOR GVT TILES							
Nominal Size	Thickness(mm) No. of tiles per carton Average weight per carton (Kgs)		Coverage area per carton				
1200x1800mm	9	2	88	4.32 Sq.Mtr / 46.50 Sq.ft			

TECHNICAL SPECIFICATION FOR GVT TILES							
Characteristics	Requirement as per IS 15622 : 2017 < E ≤ 0.08 Group Bla	Requirement as per ISO 13006 ≤ 0.5% Group Bla	Our Values	Test Method			
A) Dimension & Surface Quality							
I) Length & Width	± 0.1%	± 0.3%	± 0.1%	IS 13630 Part 1/ ISO 10545-2			
ii) Thickness	± 5.0%	± 5.0%	± 4.0%				
iii) Straightness of Side	± 0.1%	± 0.3%	± 0.1%				
iv) Rectengularity	± 0.1%	± 0.3%	± 0.1%				
v) Surface Flatness							
a) Center curvature (%) ( max.Deviation)	± 0.5%	± 0.4%	± 0.2 %				
b) Edge curvature (%) { max.Deviation)	± 0.5%	± 0.4%	± 0.2 %				
c) Corner warpage (%)( max.Deviation)	± 0.5%	± 0.4%	± 0.2 %				
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects				
B) Physical Properties							
I) Water Absorption	Av E ≤ 0.08 %, Individual 0.1 max	Av ≤ 0.5 %, Individual 0.6% max	Avg. E≤ 0.08 %	IS 13630 Part 2/ ISO 10545-3			
ii) Modulus of Rupture [N/mm2]	Av 35, Individual 32 min	Av 35, Individual 32 min	Avg, 35 Ind 32	_ IS 13630 Part 6/ISO 10545-4			
iii) Breaking Strength in N	Min. 1300	Min. 1300	Min. 1300				
iv) Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10			
v) Scratch Hardness of surface (Mohs)	Min 5	N/A	Min.5 (for VC & RT), Min.3 (for Polished)	IS 13630 Part 13			
vi) Resistance to Abrasion of glazed tiles( Class I to V )	Min II	Abrasion Class & Cycle passed	Class-V (for VC & RT), Class-III (for Polished)	IS 13630 Part 11 /ISO 10545-7			
vii) Coefficient of linear thermal expansion from ambient temperature to 100° c	6 X 10 <sup>-6</sup> K <sup>-1</sup> Max	Test Method Available	Max 6 X 10 <sup>-6</sup> K <sup>-1</sup> max	IS 13630 Part 4/ ISO 10545-8			
viii) Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9			
ix) Crazing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11			
x) Impact Resistance as Co-efficient of Re stitution	0.55 min	Required	Min 0.55	ISO 10545-5			
xi) Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12			
C) Chemical Resistance (glazed Tiles)							
l) Stain Resistance	Min. Class 1 ( For Matt ) Min. Class 2 ( For Polished )	Min Class 3	Min Class-1	IS 13630 Part 8 &ISO 10545-14			
ii) Resistance to household chemicals	Min Class AA	Min Class GB	Min Class AA	IS 13630 Part 8/ ISO 10545-13			
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value <sup>r</sup>	Min Class AA				

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. "Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed.

Complaints will not be entertained for Borders, Highlighters & Motifs.

 $\mathbf{a}$ 

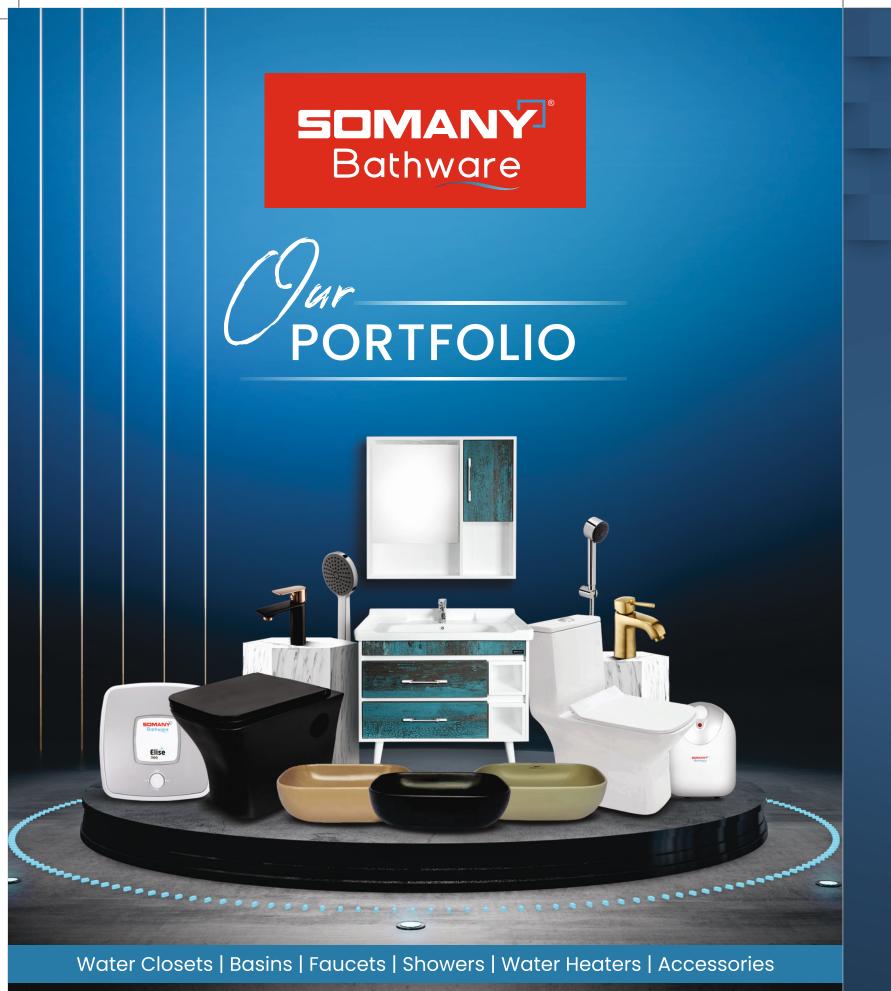





TILE ADHESIVE



### HIGH STRENGTH POLYMER MODIFIED

TILE ADHESIVE



#### BENEFITS

- » READY AND EASY TO USE
- > EXCELLENT BONDING WITH ALL SURFACES
- FAST SETTING
- SELF-CURING

#### USES <

- FOR FIXING ALL TYPE OF TILES
- FOR NEW FLOORING AND RENOVATION
- » CAN BE USED FOR TILE ON TILE