





#### **SOMANY**

Somany Ceramics Limited: Noida: F-36, Sector-6; Ph.: 0120-4627900.

Ahmedabad: 601 to 606, 6th floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad, Gujarat-382481. Ph.: 079-27661103 / 27661104

Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913

www.somanyceramics.com | e-mail marketing@somanyceramics.com

**Toll Free No. 1800-103-0004** (Timing-10:00am to 6:30pm; Mon-Fri)







Find us at: www.facebook.com/SomanyCeramic





Find us at: www.instagram.com/SomanyCerami







Log into the world of luxury and grandeur with Duragres Eminent collection. Inspired by the vibrant shades of woods, the shades and patterns of Eminent invite nature's harmony and grace to make every day blissful.

#### **APPLICATION**



Residences

Shops



Hotels

曲

Airports









Restaurants



Malls



Railway Stations

Bathrooms



Kitchens



















Easy to Clean









Frost Resistance



Break Resistance









Shifting the focus from minimalism to mighty force guaranteed makes for an interior design trend guarnteed to get heads turning. Shifting the focus from minimalism to mighty force guaranteed makes for an interior design trend guarnteed to get heads turning.

## **INDEX**

Wood Matt 06

Carving 13

Wood Rustic 14

196x 1200MM





STRIO VALOR ARGENT WOOD ASH **MATT** | 196x1200







STRIO VALOR AKIO WOOD ROBBLE **MATT** | 196x1200







STRIO VALOR BURL WOOD TEAK

MATT | 196x1200







STRIO VALOR BURL WOOD BRICH MATT | 196x1200









STRIO VALOR BENZ WOOD ROBBLE **MATT** | 196x1200





STRIO VALOR ELLE WOOD WANGE **MATT** | 196x1200





STRIO VALOR KALIDA WOOD BROWN **MATT** | 196x1200







STRIO VALOR PYRUS WOOD TEAK **MATT** | 196x1200





# Expressing Aspect of Jurfaces



STRIO VALOR PYRUS WOOD TEAK



Feel that Admires for More

The attention seeker you would love to attend every minute. Step up and experience the heavenly grandeur beneath your feet.
















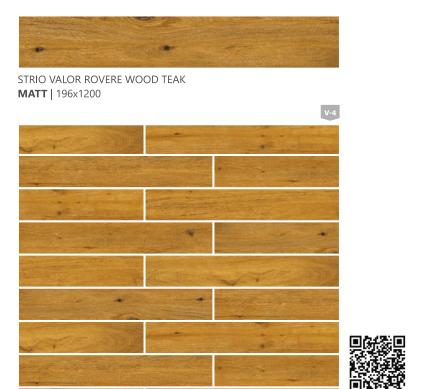






STRIO IMP MELANIE BROWN CARVING | 196x1200











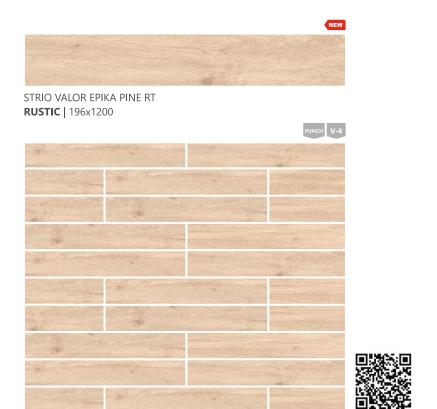

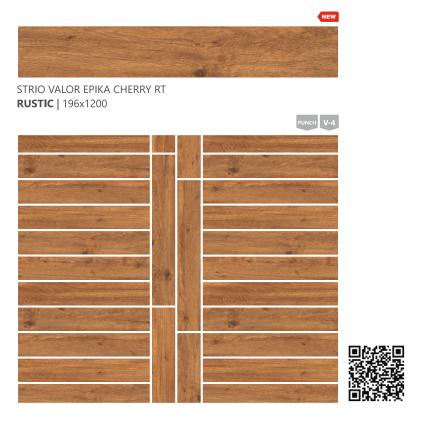

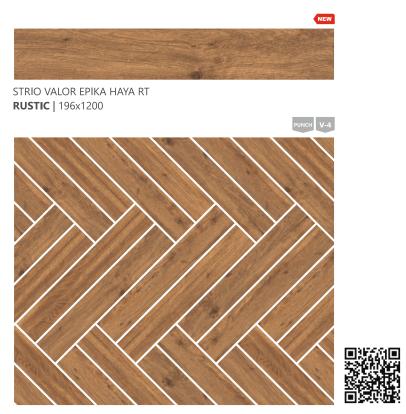

# Make a Royal Statement



STRIO VALOR EKHO TEAK RT



# Decode The Mystery of Magnificence

Feast your senses with designs that excels both in beauty and practicality. Seamless and flawless interpretation of your idea when translates into reality, it becomes an absolute piece of art!











STRIO VALOR EKHO TEAK RT

**RUSTIC** | 196x1200

















#### VEILCRAFT (VC) SHIELD

Not only look and style; the buzz word for the Gen X tile is timeless elegance. Here comes the revolutionary patented "VeilCraft (VC) Shield" technology, a 'high abrasion resistant glaze composition', known as VC (VeilCraft) Shield. This is the first ever patented technology in Indian Ceramic Industry. This not only gives you the perfect aesthetics for your space but also the lifelong protection to your floor.

#### Result Of The abrasion test at 25,000 revolutions as per the PEI Methodology



Natural Granite










VC Shield Tile

Polished Vitrified Tile

Patent Certificate for "High Abrasion Resistant Glaze" applied on VC Shield Tiles

Traditional Tile




#### TECHNICAL SPECIFICATION

PACKING DETAILS FOR GVT TILES							
Nominal Size	Thickness(mm)	No. of tiles per carton	Average weight per carton (Kgs)	Coverage area per carton			
196x1200mm	9	6	27.2	1.41 Sq.Mtr / 15.18 Sq.ft			

TECHNICAL SPECIFICATION FOR GVT TILES							
Characteristics	Requirement as per IS 15622 : 2017 < E ≤ 0.08 Group Bla	Requirement as per ISO 13006 ≤ 0.5% Group Bla	Our Values	Test Method			
A) Dimension & Surface Quality							
I) Length & Width	± 0.1%	± 0.3%	± 0.1%	IS 13630 Part 1/ ISO 10545-2			
ii) Thickness	± 5.0%	± 5.0%	± 4.0%				
iii) Straightness of Side	± 0.1%	± 0.3%	± 0.1%				
iv) Rectengularity	± 0.1%	± 0.3%	± 0.1%				
v) Surface Flatness							
a) Center curvature (%) ( max.Deviation)	± 0.5%	± 0.4%	± 0.2 %				
b) Edge curvature (%) { max.Deviation)	± 0.5%	± 0.4%	± 0.2 %				
c) Corner warpage (%)( max.Deviation)	± 0.5%	± 0.4%	± 0.2 %				
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects				
B) Physical Properties							
l) Water Absorption	Av E ≤ 0.08 %, Individual 0.1 max	Av ≤ 0.5 %, Individual 0.6% max	Avg. E≤ 0.08 %	IS 13630 Part 2/ ISO 10545-3			
ii) Modulus of Rupture [N/mm2]	Av 35, Individual 32 min	Av 35, Individual 32 min	Avg, 35 Ind 32	IS 13630 Part 6/ISO 10545-4			
iii) Breaking Strength in N	Min. 1300	Min. 1300	Min. 1300	.5 10000 Tart 0/100 10040-4			
iv) Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10			
v) Scratch Hardness of surface (Mohs)	Min 5	N/A	Min.5 (for VC & RT), Min.3 (for Polished)	IS 13630 Part 13			
vi) Resistance to Abrasion of glazed tiles( Class I to V )	Min II	Abrasion Class & Cycle passed	Class-V (for VC & RT), Class-III (for Polished)	IS 13630 Part 11 /ISO 10545-7			
vii) Coefficient of linear thermal expansion from ambient temperature to 100° c	6 X 10 <sup>-6</sup> K <sup>-1</sup> Max	Test Method Available	Max 6 X 10 <sup>-6</sup> K <sup>-1</sup> max	IS 13630 Part 4/ ISO 10545-8			
viii) Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9			
ix) Crazing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11			
x) Impact Resistance as Co-efficient of Re stitution	0.55 min	Required	Min 0.55	ISO 10545-5			
xi) Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12			
C) Chemical Resistance (glazed Tiles)							
I) Stain Resistance	Min. Class 1 ( For Matt ) Min. Class 2 ( For Polished )	Min Class 3	Min Class-1	IS 13630 Part 8 &ISO 10545-14			
ii) Resistance to household chemicals	Min Class AA	Min Class GB	Min Class AA				
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value <sup>r</sup>	Min Class AA	IS 13630 Part 8/ ISO 10545-13			

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. "Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed.

Complaints will not be entertained for Borders, Highlighters & Motifs.

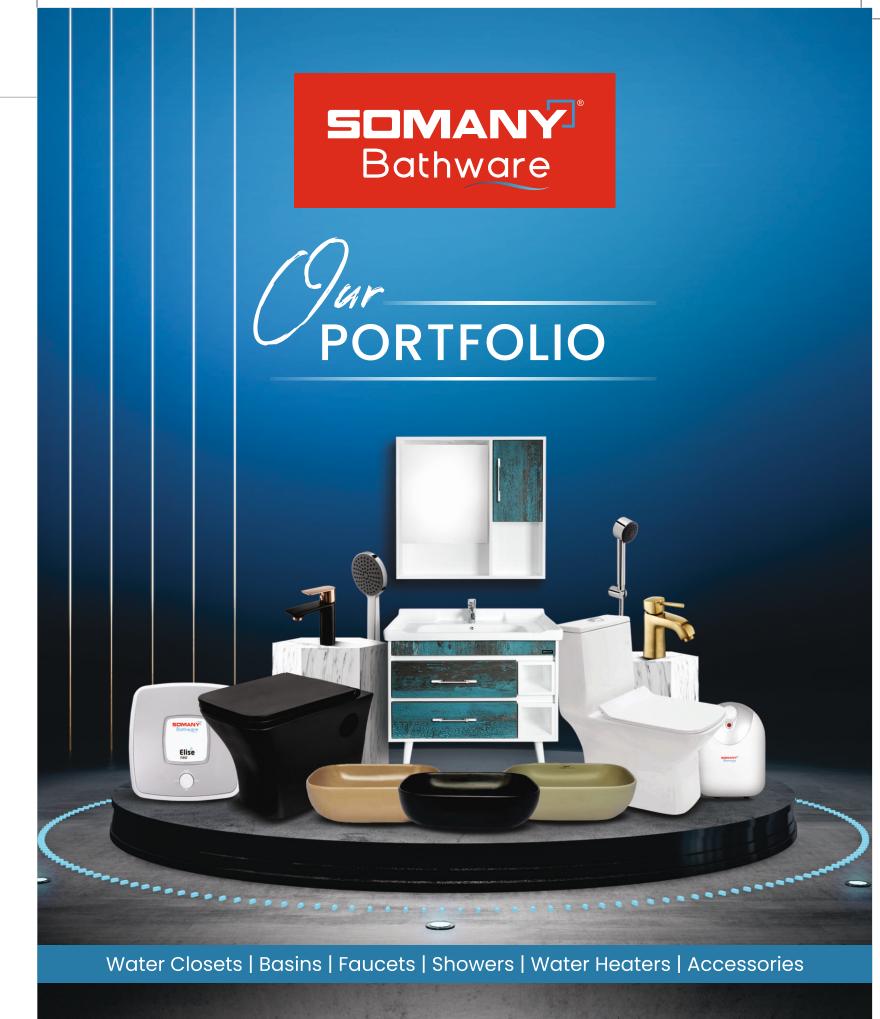







### HIGH STRENGTH POLYMER MODIFIED

### TILE ADHESIVE



#### BENEFITS **(**

- » READY AND EASY TO USE
- > EXCELLENT BONDING WITH ALL SURFACES
- FAST SETTING
- SELF-CURING

#### USES 4

- FOR FIXING ALL TYPE OF TILES
- FOR NEW FLOORING AND RENOVATION
- CAN BE USED FOR TILE ON TILE



NOTE	