



**SOMANY**

Somany Ceramics Limited : Noida: F-36, Sector-6; Ph.: 0120-4627900.

Ahmedabad: 601 to 606, 6th floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad, Gujarat-382481. Ph.: 079-27661103 / 27661104

Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913

www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:  
www.somanyceramics.com



Find us at:  
www.facebook.com/SomanyCeramic



Find us at:  
www.twitter.com/SomanyCeramic



Find us at:  
www.instagram.com/SomanyCeramics



GVT RANGE / CAT OCTOBER 2023

**DURAGRES**  
Timeless Elegance

**SOMANY**  
Tiles | Bathware

**ZAMEEN SE JUDEY**

**GLAZED  
VITRIFIED  
TILES**  
COLLECTION  
800x1600mm

UNIT - 4 | FOR SOUTH



# HEAVENLY

For those who love to indulge in fantasy, here is a chance to live it every day. A starry collection gives you a tour of the mystic of the universe at every step. Feel mesmerized. Feel hypnotized.

## APPLICATION

- |                                                                                                   |                                                                                                   |                                                                                                |                                                                                                         |                                                                                                    |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| <br>Residences | <br>Hotels     | <br>Offices | <br>Railway Stations | <br>Restaurants |
| <br>Shops    | <br>Airports | <br>Malls | <br>Bathrooms      | <br>Kitchens  |

## FEATURES

- |                                                                                                            |                                                                                                           |                                                                                                                   |                                                                                                                 |
|------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <br>Impact Resistance | <br>Acid Resistance  | <br>Ecology & Sustainable    | <br>Resistance To Staining |
| <br>Frost Resistance  | <br>Break Resistance | <br>Thermal Shock Resistance | <br>Easy to Clean          |





Shifting the focus from minimalism to mighty force guaranteed makes for an interior design trend guaranteed to get heads turning. Shifting the focus from minimalism to mighty force guaranteed makes for an interior design trend guaranteed to get heads turning.


# INDEX

|                     |    |
|---------------------|----|
| High Gloss          | 06 |
| Full Polish Endless | 08 |
| Full Polish         | 09 |
| Carving             | 25 |
| Matt                | 33 |
| VC                  | 36 |

800x  
1600MM




NEW

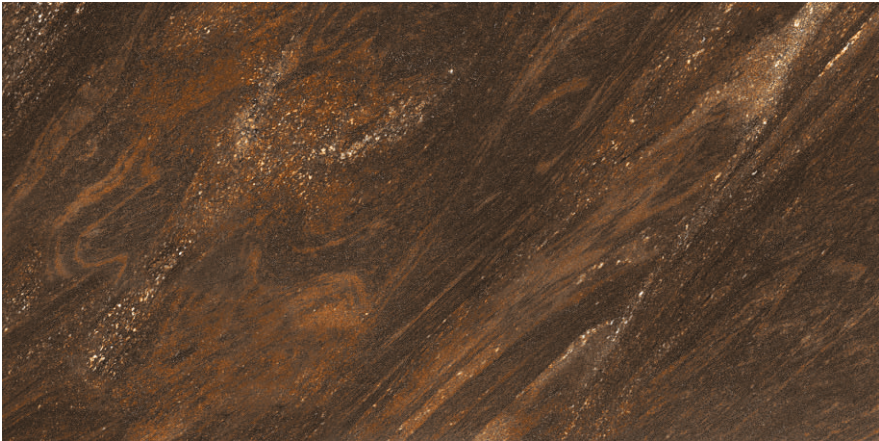




V-2

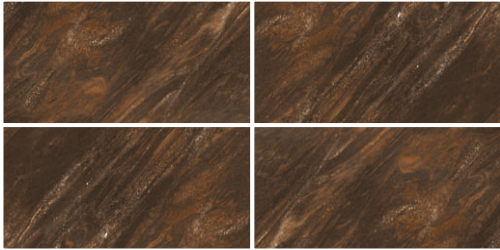


ENORME LUCIDO ALBENIZ BROWN | **HIGH GLOSS** | 800X1600MM

NEW

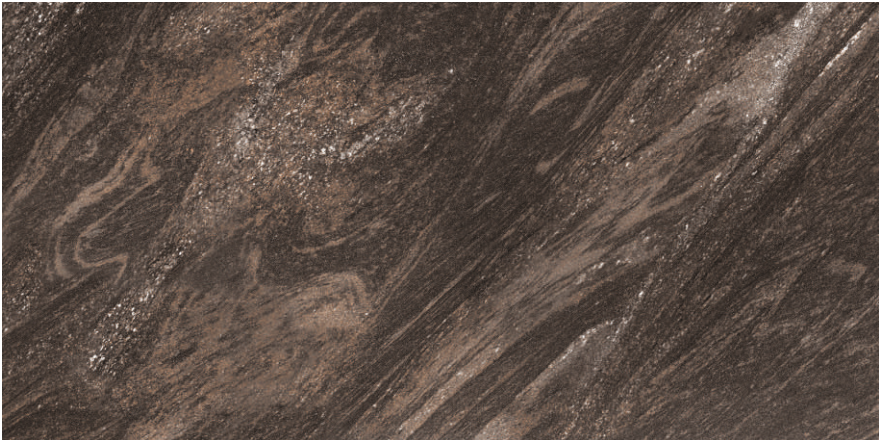




V-2

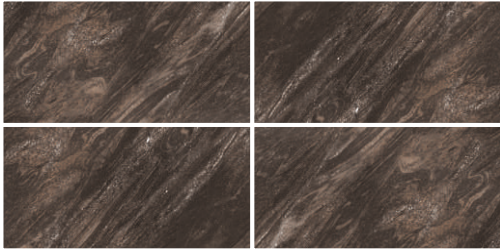


ENORME LUCIDO ALBENIZ COFFEE | **HIGH GLOSS** | 800X1600MM

NEW

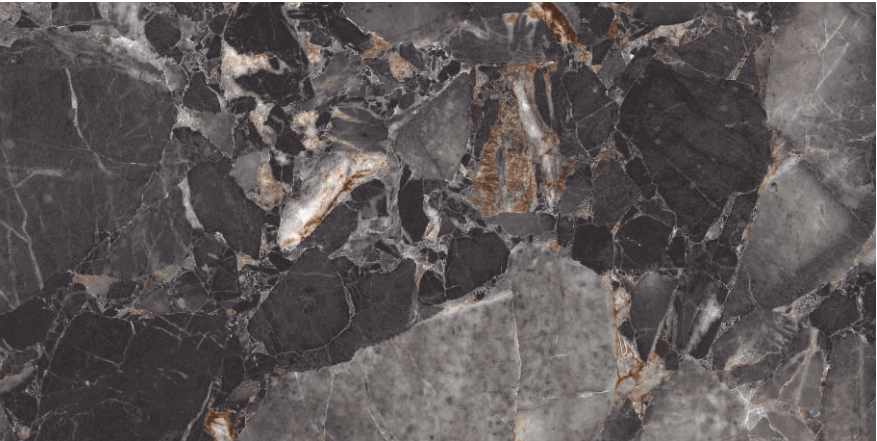




V-3

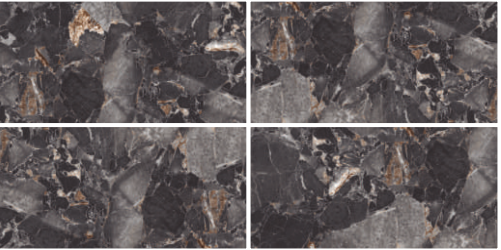


ENORME LUCIDO SAGITTA GREY | **HIGH GLOSS** | 800X1600MM

NEW

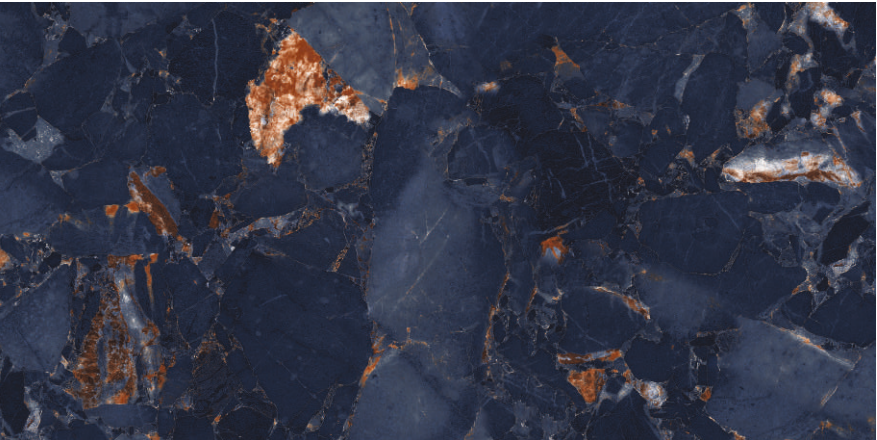



V-3

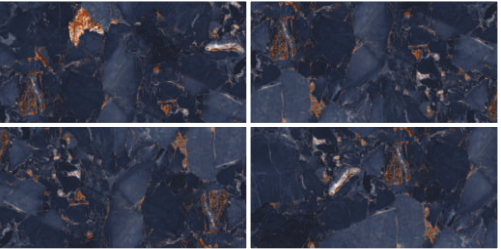


ENORME LUCIDO SAGITTA BLUE | **HIGH GLOSS** | 800X1600MM




800x1600MM | Full Polish Endless



ENORME GIANNA STATUARIO FP | **FULL POLISH ENDLESS** | 800X1600MM

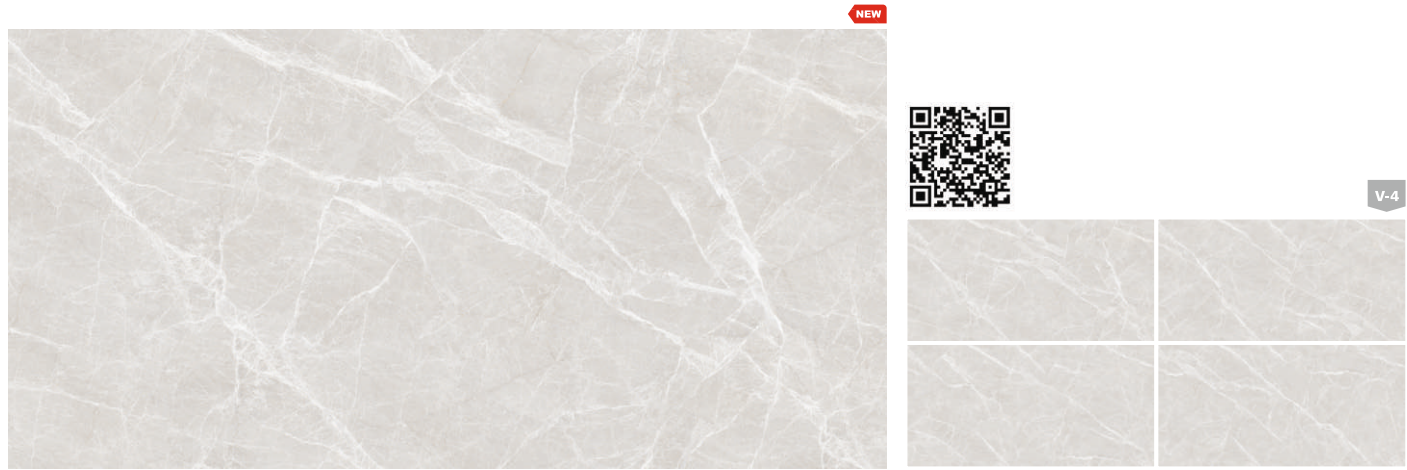


ENORME SPENCER NATURAL FP | **FULL POLISH ENDLESS** | 800X1600MM

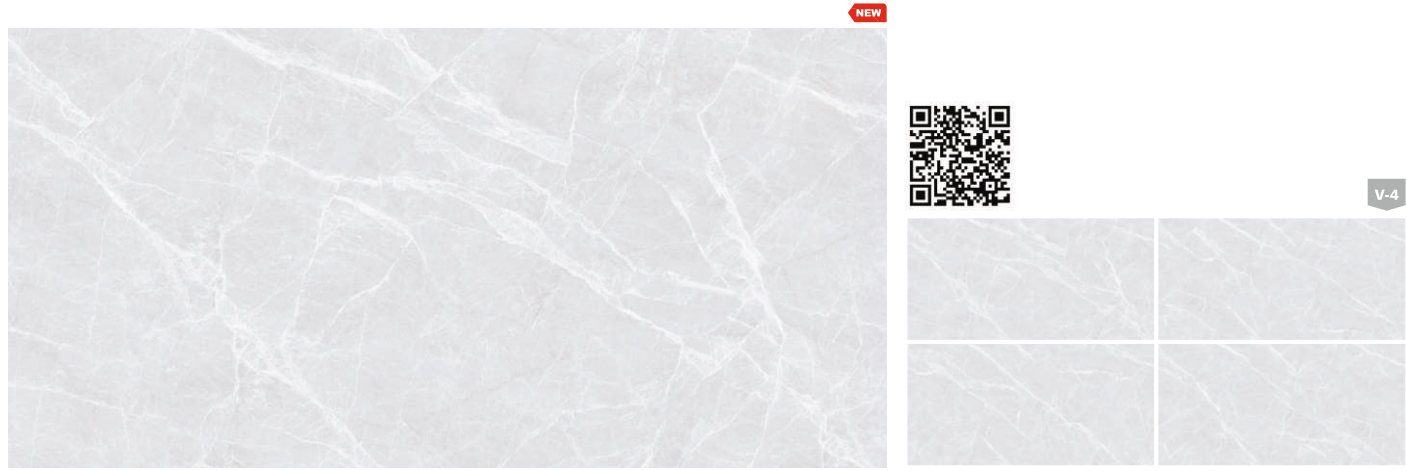


ENORME SPENCER GREY FP | **FULL POLISH ENDLESS** | 800X1600MM

800x1600MM | Full Polish

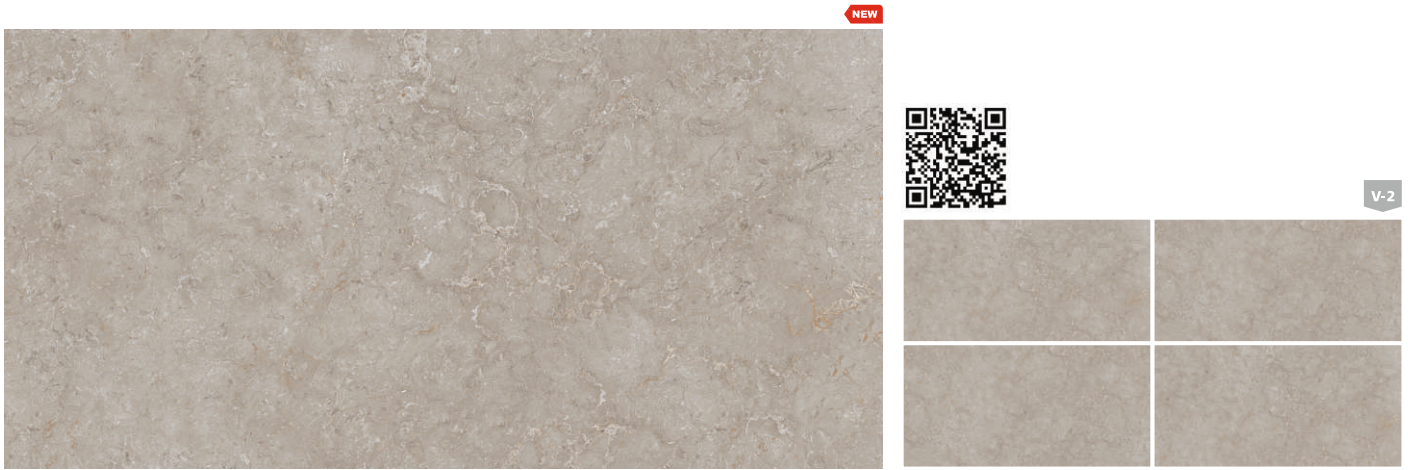

ENORME ARCHER GREY FP | **FULL POLISH** | 800X1600MM

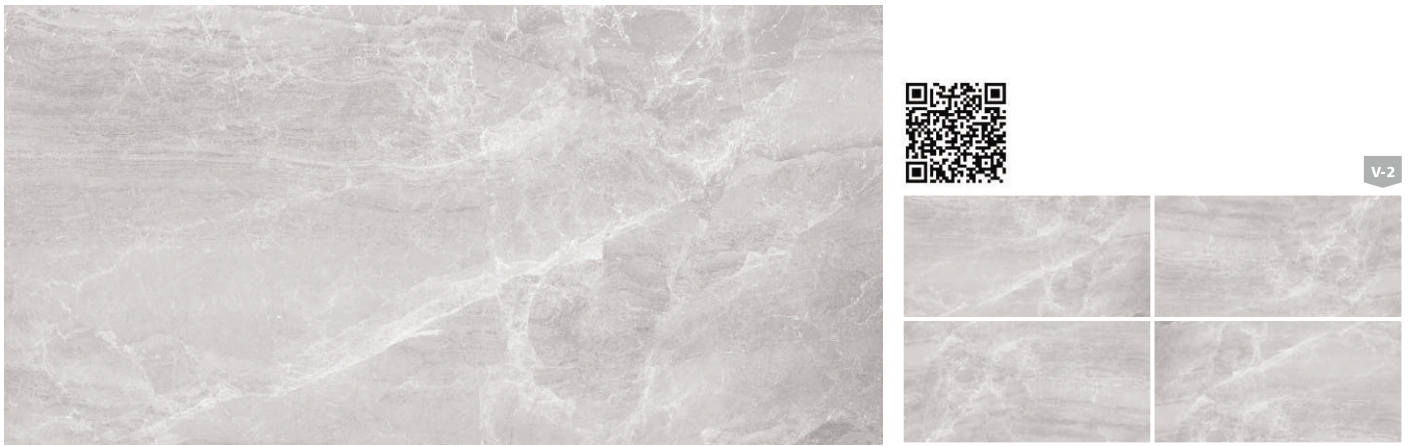

ENORME ARENADO GREY LIGHT FP | **FULL POLISH** | 800X1600MM



ENORME ARENA BEIGE FP | **FULL POLISH** | 800X1600MM



Crafted to *Perfection*



ENORME SPENCER NATURAL FP



The Ultimate Trend of *Perfection*

The luxury that envelopes your precious space and enhances its overall opulence... is undoubtedly our enchanting collection.

- VERSATILE SOLUTIONS
- EASIER TO LAY
- RESISTANT TO CHEMICAL
- FROST RESISTANT
- RESISTANT TO STAINS
- WIDE RANGE




800x1600MM | Full Polish




V-3



ENORME ACROSS BEIGE FP | **FULL POLISH** | 800X1600MM

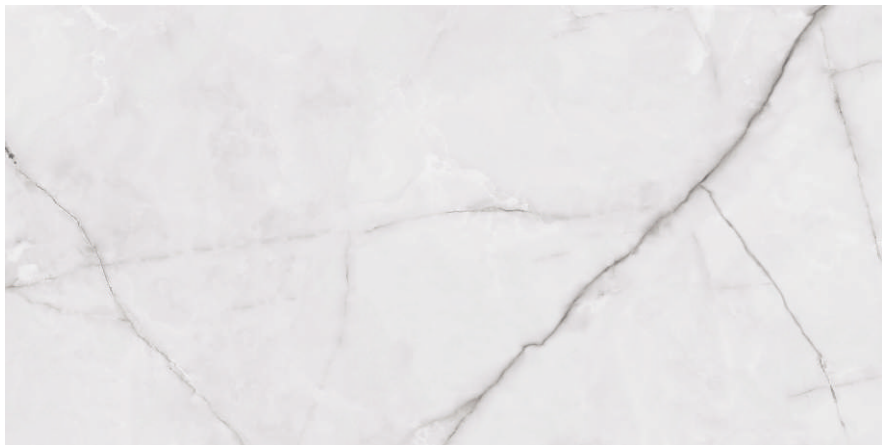

V-3

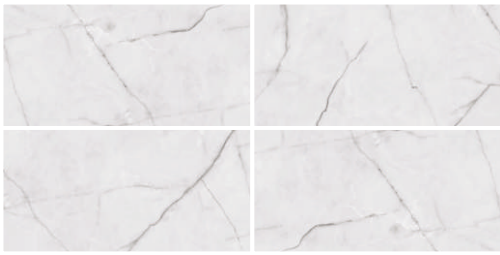

ENORME ALODIE GREY FP | **FULL POLISH** | 800X1600MM



V-3




ENORME ACE ARMANI NATURAL FP | **FULL POLISH** | 800X1600MM

800x1600MM | Full Polish




V-3

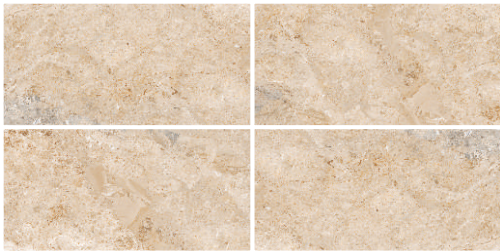


ENORME BRECCIA NATURAL FP | **FULL POLISH** | 800X1600MM



V-2

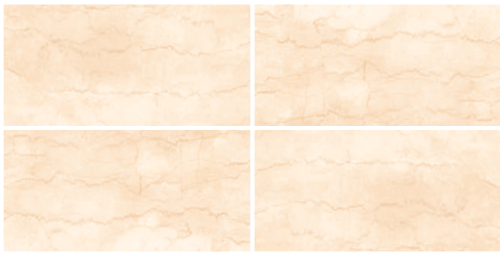

ENORME CLARA BOTTOCHINO BEIGE FP | **FULL POLISH** | 800X1600MM

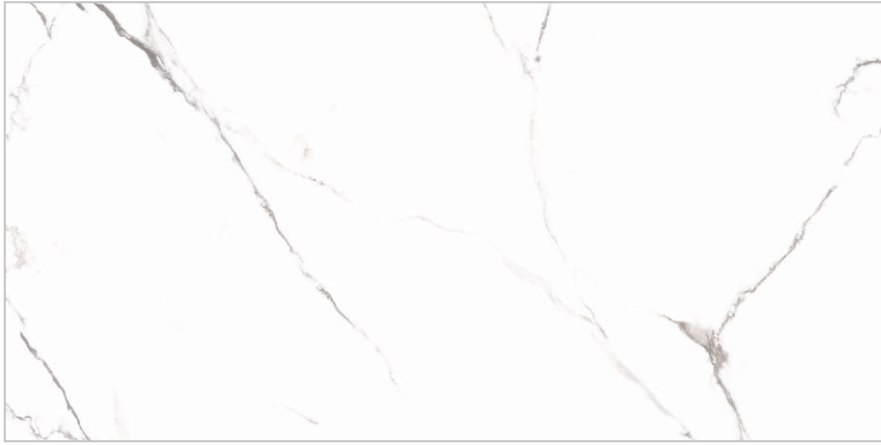

V-3




ENORME EMERY STATUARIO FP | **FULL POLISH** | 800X1600MM



800x1600MM | Full Polish




V-3

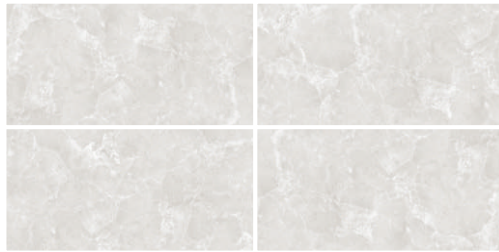

ENORME ETERNA GREY FP | **FULL POLISH** | 800X1600MM




V-4

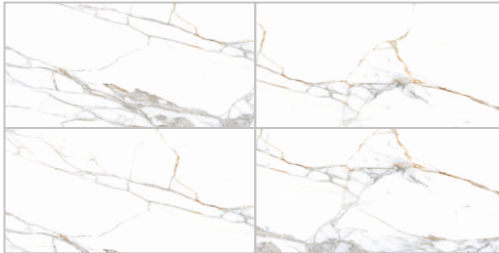

ENORME IMPERAL STATURIO FP | **FULL POLISH** | 800X1600MM



V-3

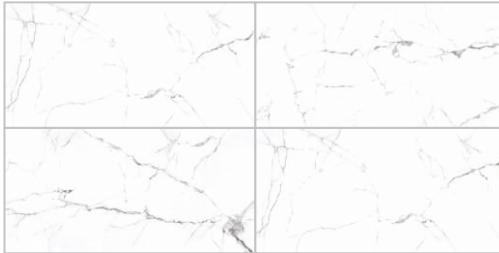

ENORME LUNESIS SUPER WHITE FP | **FULL POLISH** | 800X1600MM

800x1600MM | Full Polish



V-4



ENORME LIEM BEIGE FP | **FULL POLISH** | 800X1600MM



V-4



ENORME MOZART BEIGE FP | **FULL POLISH** | 800X1600MM



V-4



ENORME MOZART GREY FP | **FULL POLISH** | 800X1600MM



A Gleam of *Beauty*



ENORME LUNESIS SUPER WHITE FP



Hues of Natural *Elegance*

Indulge yourself in the ingenuity and unexpected beauty of tiles with smooth and gleaming textures to brighten your home.

- VERSATILE SOLUTIONS
- EASIER TO LAY
- RESISTANT TO CHEMICAL
- FROST RESISTANT
- RESISTANT TO STAINS
- WIDE RANGE



800x1600MM | Full Polish



SOMANY  
DURAGRES



V-4




ENORME NEO DIANO BEIGE FP | **FULL POLISH** | 800X1600MM



NEW



V-4

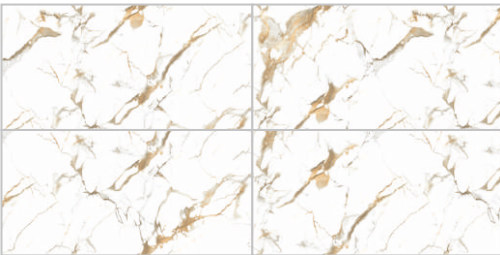

ENORME NOLITA STATUARIO FP | **FULL POLISH** | 800X1600MM




V-3




ENORME NYLO GREY LIGHT FP | **FULL POLISH** | 800X1600MM

800x1600MM | Full Polish

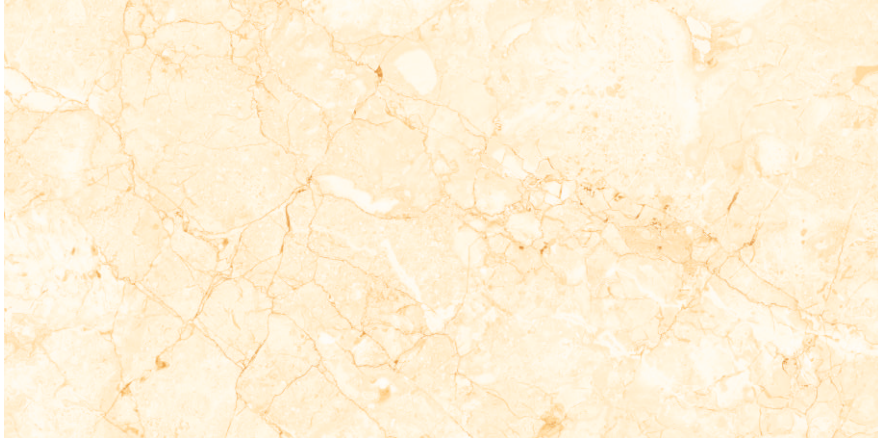


V-2

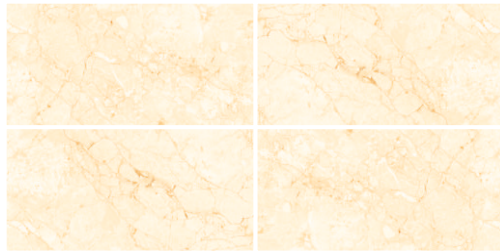

ENORME PRIME ATLAS CREMA FP | **FULL POLISH** | 800X1600MM




V-2

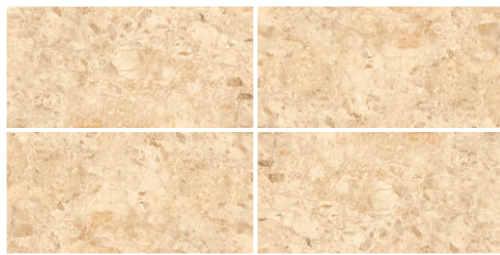

ENORME PRIME BRECCIA AURUM FP | **FULL POLISH** | 800X1600MM



V-3

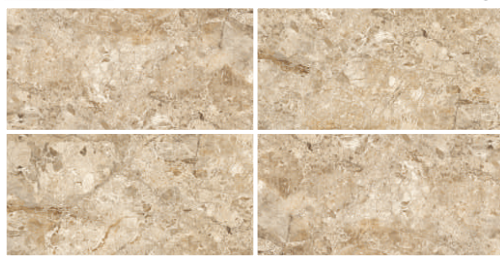

ENORME PRIME BRECCIA GOLD FP | **FULL POLISH** | 800X1600MM



800x1600MM | Full Polish



V-2

ENORME PRIME DYNA GOLD FP | **FULL POLISH** | 800X1600MM



NEW



V-4

ENORME PRISTO LIGHT GREY FP | **FULL POLISH** | 800X1600MM



NEW



V-4

ENORME PRESTO NATURAL FP | **FULL POLISH** | 800X1600MM



800x1600MM | Full Polish



V-2

ENORME ROSABELA GREY FP | **FULL POLISH** | 800X1600MM





NEW



V-3

ENORME SENTILIA LIME FP | **FULL POLISH** | 800X1600MM

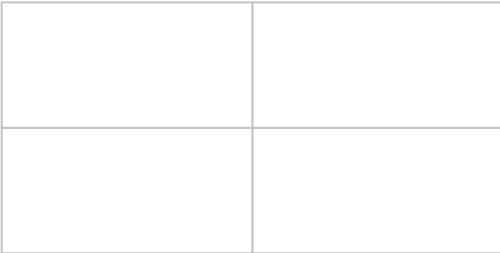

V-1

ENORME WHITE FP | **FULL POLISH** | 800X1600MM



Bring Home the *Finesse*



ENORME PRIME BRECCIA GOLD FP



Impressive *Looks*

Transform your home or space into awe-inspiring and vibrant subjects by incorporating the stunning range of tiles from somany, elevating your space to a whole new level.


- VERSATILE SOLUTIONS
- EASIER TO LAY
- RESISTANT TO CHEMICAL
- FROST RESISTANT
- RESISTANT TO STAINS
- WIDE RANGE




800x1600MM | Full Polish



V-2

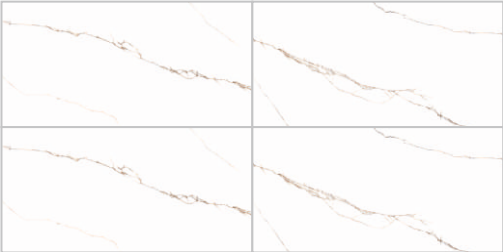

ENORME STATUARIO GOLD FP | **FULL POLISH** | 800X1600MM

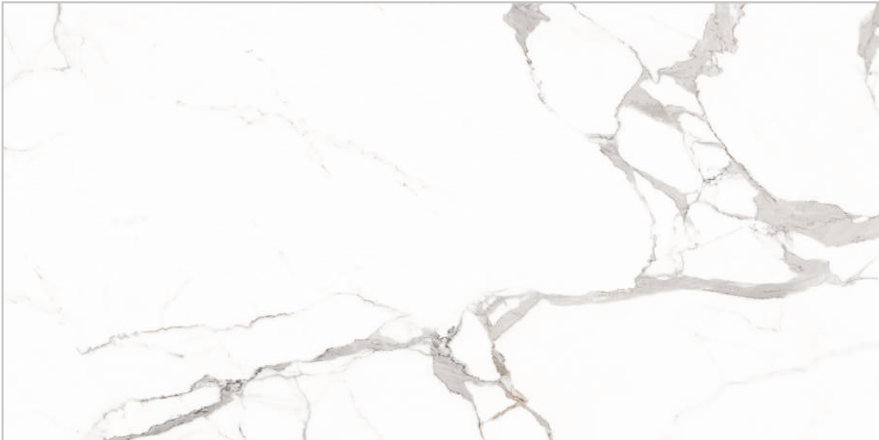


V-2




ENORME RIOHA STATUARIO FP | **FULL POLISH** | 800X1600MM

800x1600MM | Carving

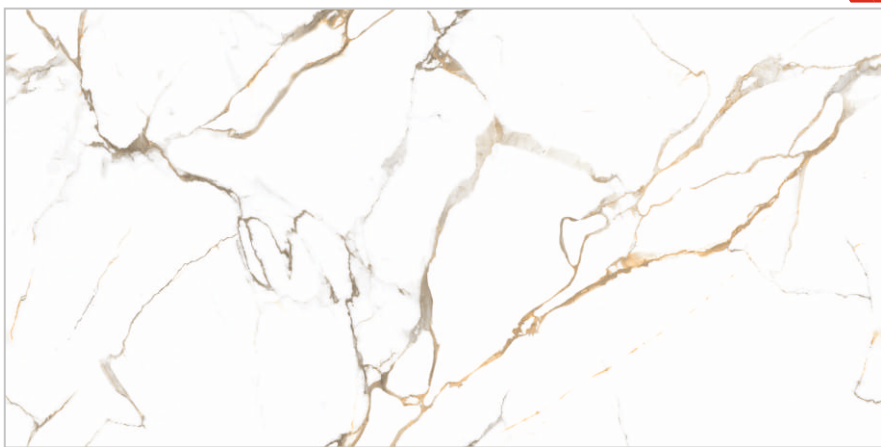


V-2

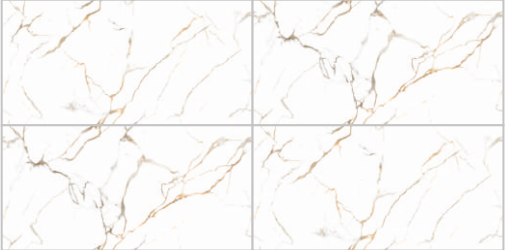

ENORME IMP ADMES GOLD | **CARVING** | 800X1600MM



V-3

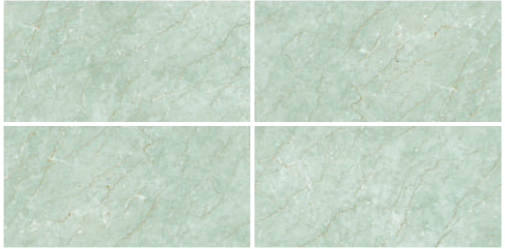

ENORME IMP AMBRE AQUA | **CARVING** | 800X1600MM



V-3



ENORME IMP CLRYS WHITE | **CARVING** | 800X1600MM



800x1600MM | Carving




V-2



ENORME IMP CLARA BOTTICHINO BEIGE | **CARVING** | 800X1600MM



V-2

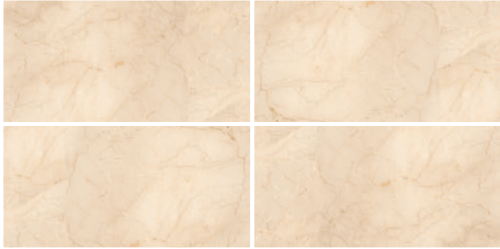

ENORME IMP CREMA MARFILE | **CARVING** | 800X1600MM



V-2



ENORME IMP DARKO CREMA | **CARVING** | 800X1600MM


800x1600MM | Carving




V-2



ENORME IMP DARCO WHITE | **CARVING** | 800X1600MM

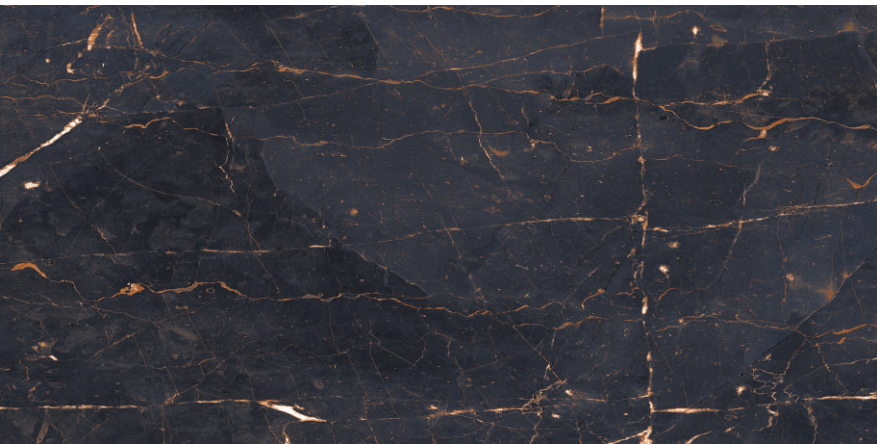

V-3

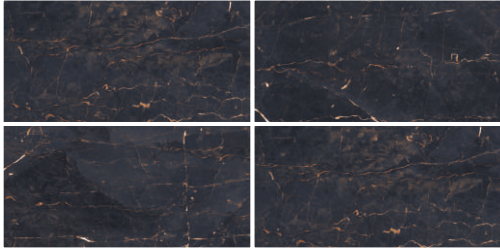

ENORME IMP EVERLY JET BLACK | **CARVING** | 800X1600MM



V-3



ENORME IMP HOWN BIANCO | **CARVING** | 800X1600MM



For Modern *Surroundings*



ENORME IMP CREMA MARFILE



For An Effortless *Lifestyle*

Introducing an extraordinary collection that embodies architectural elegance, Somany Duragres offers a wide range of styles and designs.

- VERSATILE SOLUTIONS
- EASIER TO LAY
- RESISTANT TO CHEMICAL
- FROST RESISTANT
- RESISTANT TO STAINS
- WIDE RANGE



800x1600MM | Carving



V-3



ENORME IMP LOURDS BEIGE | **CARVING** | 800X1600MM




V-3



ENORME IMP PAULING BEIGE | **CARVING** | 800X1600MM




V-4

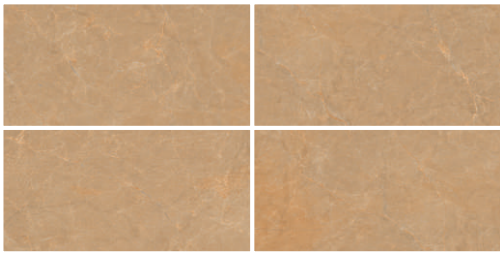

ENORME IMP PORTMORE BROWN | **CARVING** | 800X1600MM

800x1600MM | Carving

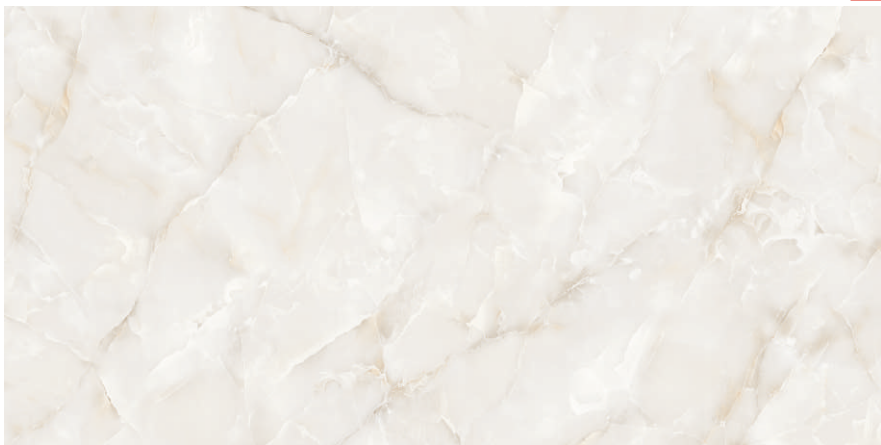


V-1



ENORME IMP SONANTE ONIX | **CARVING** | 800X1600MM



V-2

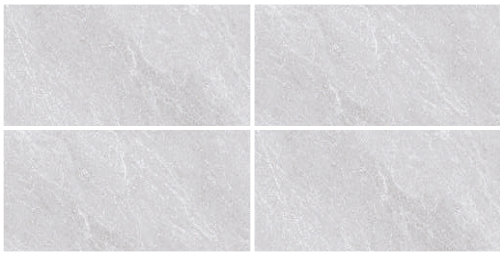

ENORME IMP SLONE LIGHT GREY | **CARVING** | 800X1600MM




V-4




ENORME CRYSTALO SATURNO CREMA | **SUGAR LAPATTO** | 800X1600MM




800x1600MM | Carving

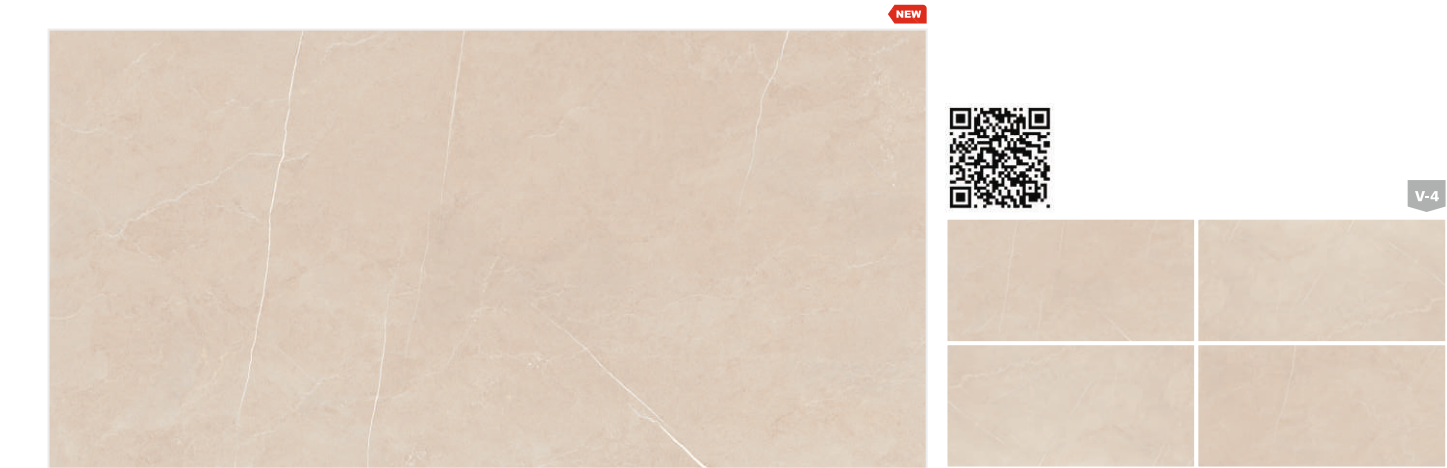

ENORME IMP VALENTINO BEIGE | **CARVING** | 800X1600MM

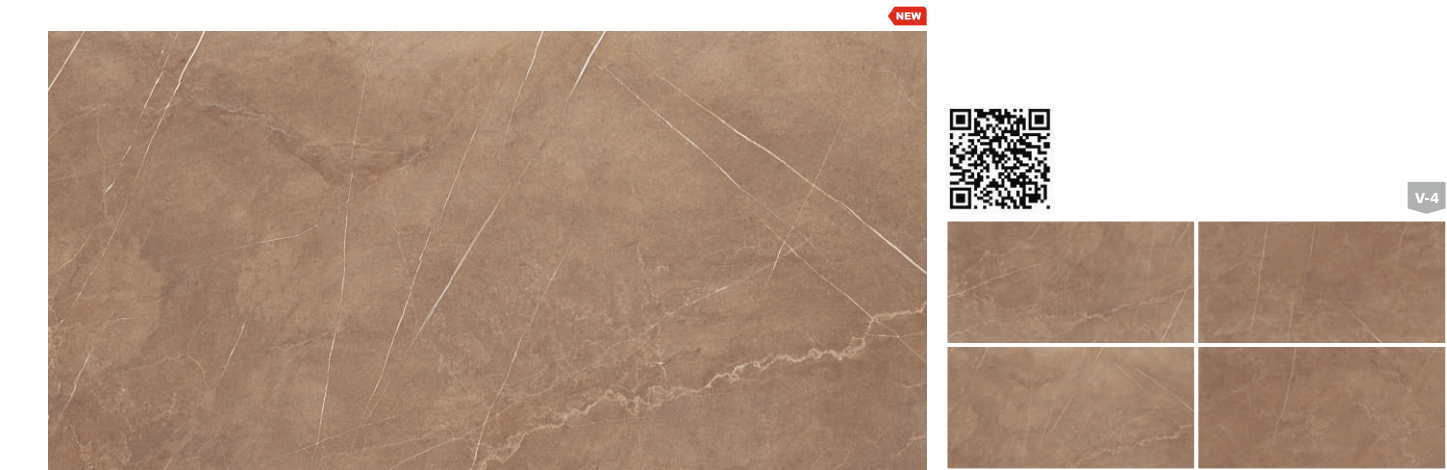


ENORME IMP VALENTINO COFFEE | **CARVING** | 800X1600MM

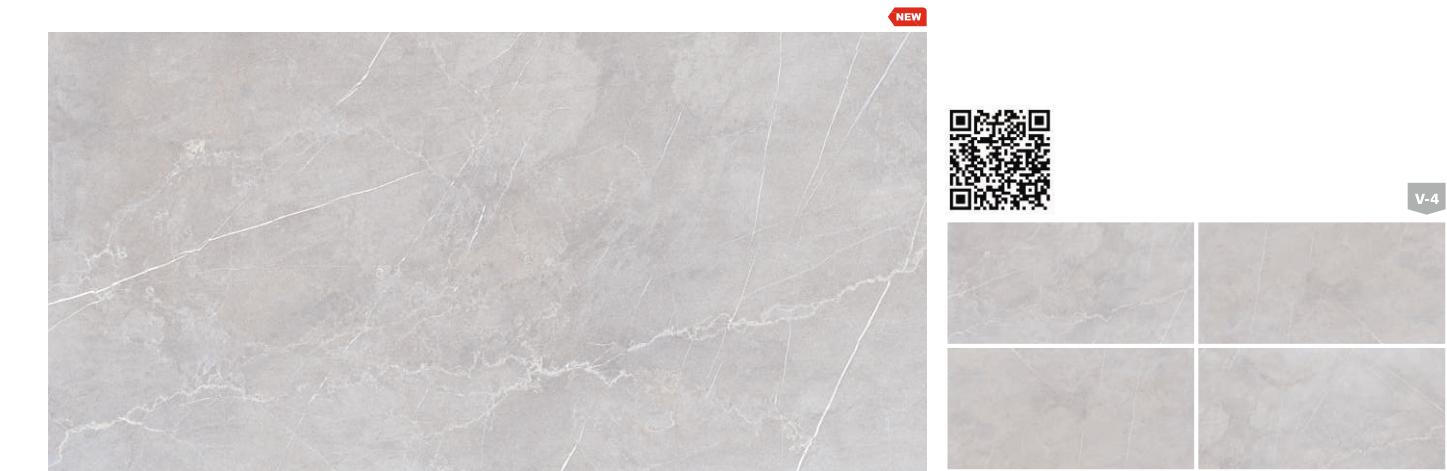


ENORME IMP VALENTINO GREY | **CARVING** | 800X1600MM




800x1600MM | Matt

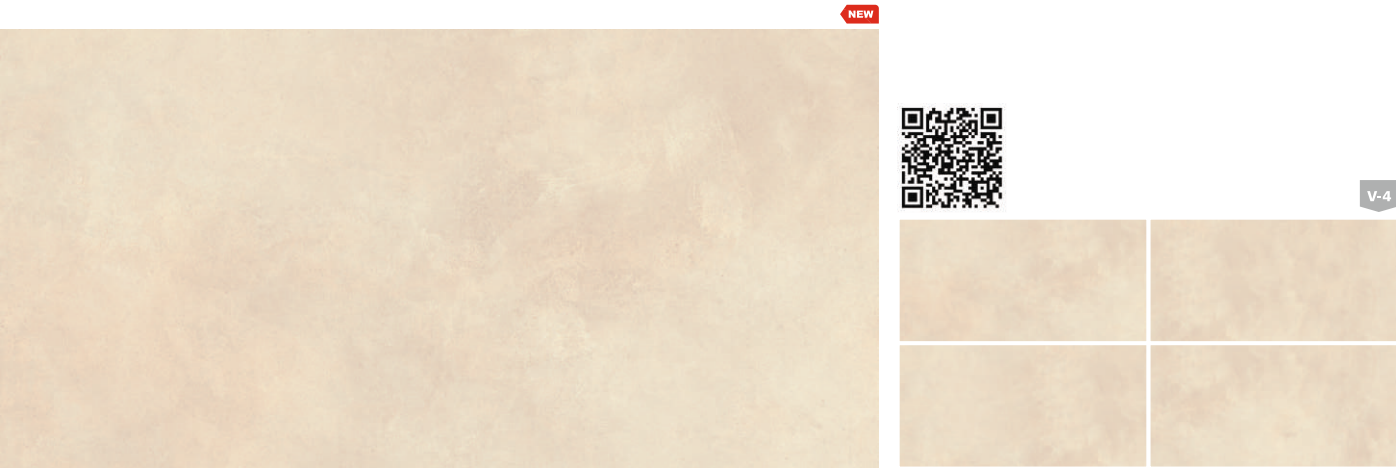

ENORME STONE BEIGE | **MATT** | 800X1600MM

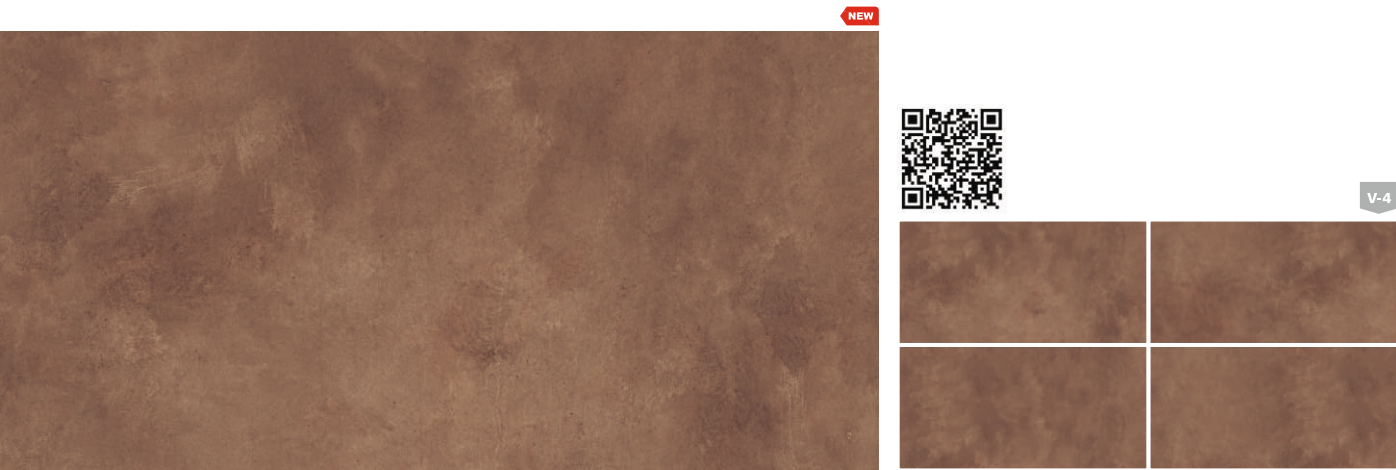

ENORME STONE BROWN | **MATT** | 800X1600MM

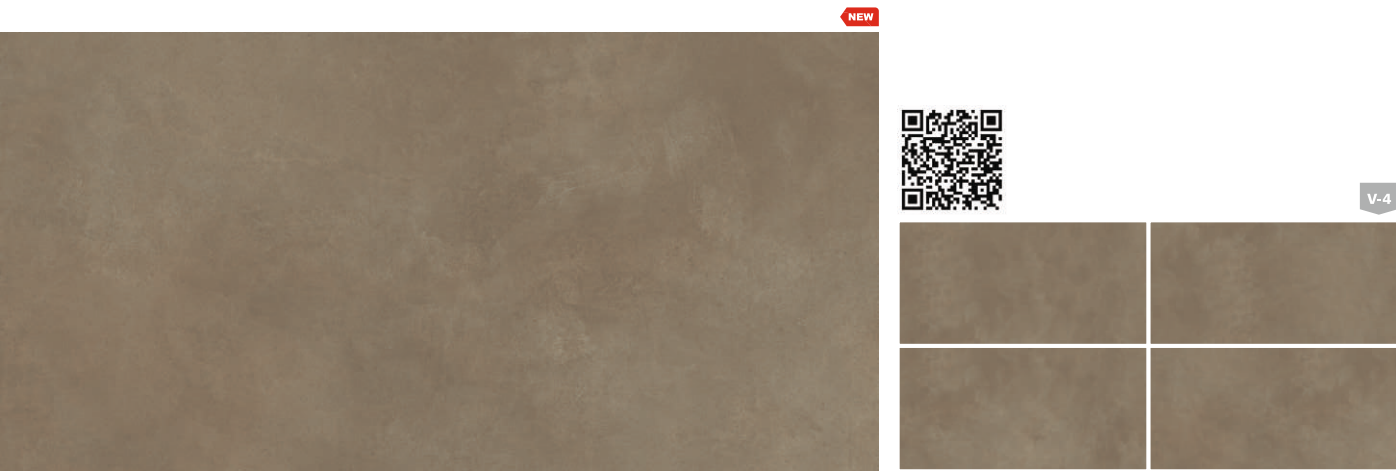

ENORME STONE EARTH | **MATT** | 800X1600MM



Feel the *Surreal Charm*



ENORME EMINA GREY | ENORME EMINA LIGHT GREY




Infuse Vibrancy in *The Life*

Bask in a luxurious experience evoked by the majestic beauty of matt Collection. An array of enthralling designs that take the aesthetic beauty of the space many notches higher!


-  VERSATILE SOLUTIONS
-  EASIER TO LAY
-  RESISTANT TO CHEMICAL
-  FROST RESISTANT
-  RESISTANT TO STAINS
-  WIDE RANGE




800x1600MM | VC

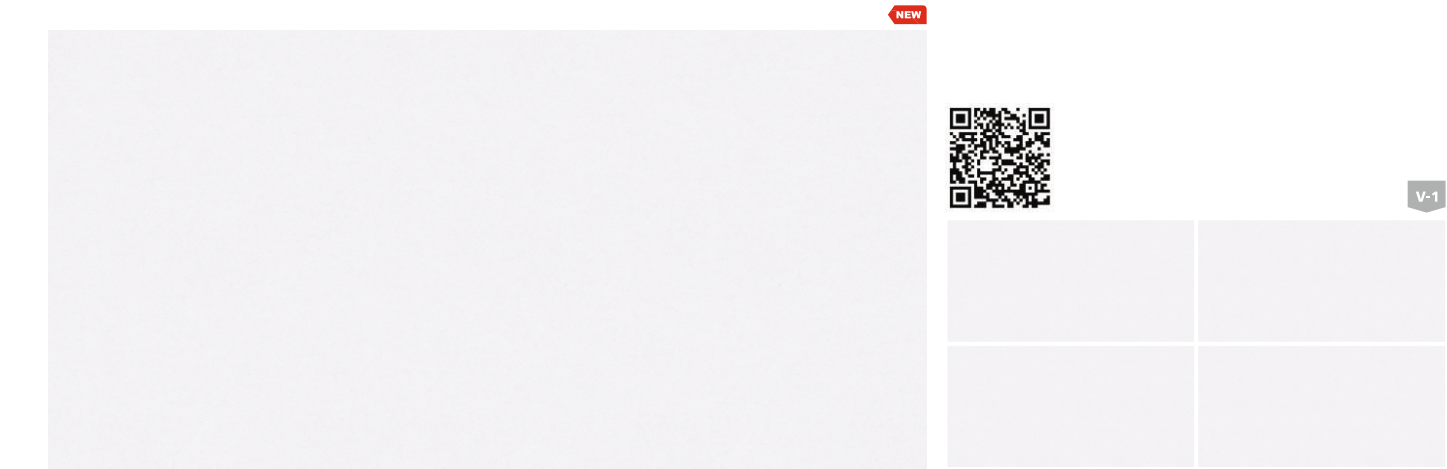

ENORME EMINA BIANCO | VC | 800X1600MM

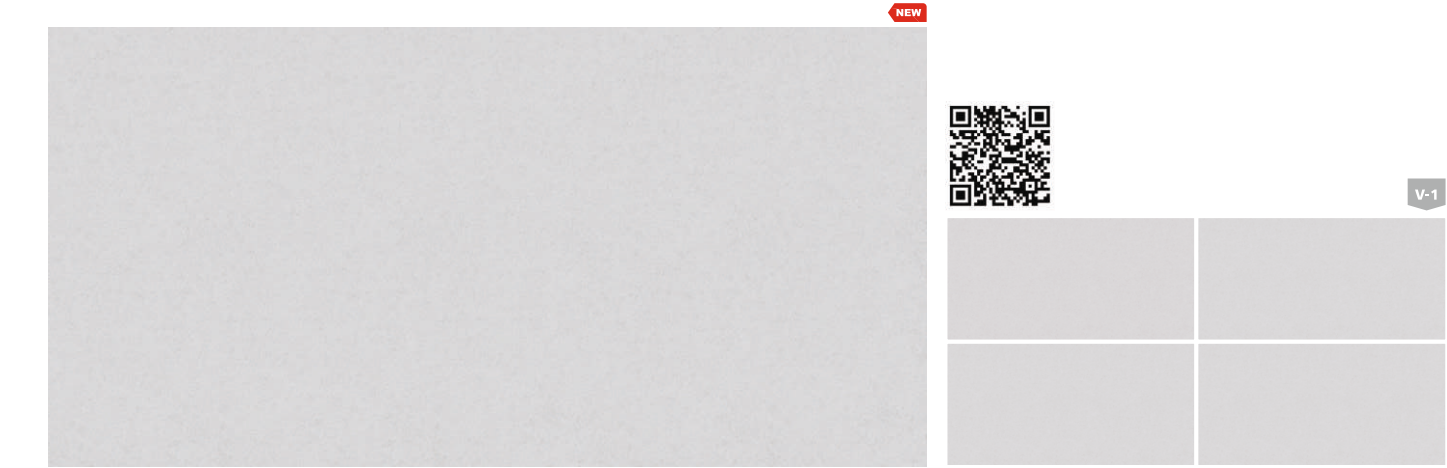


ENORME EMINA LIGHT GREY | VC | 800X1600MM

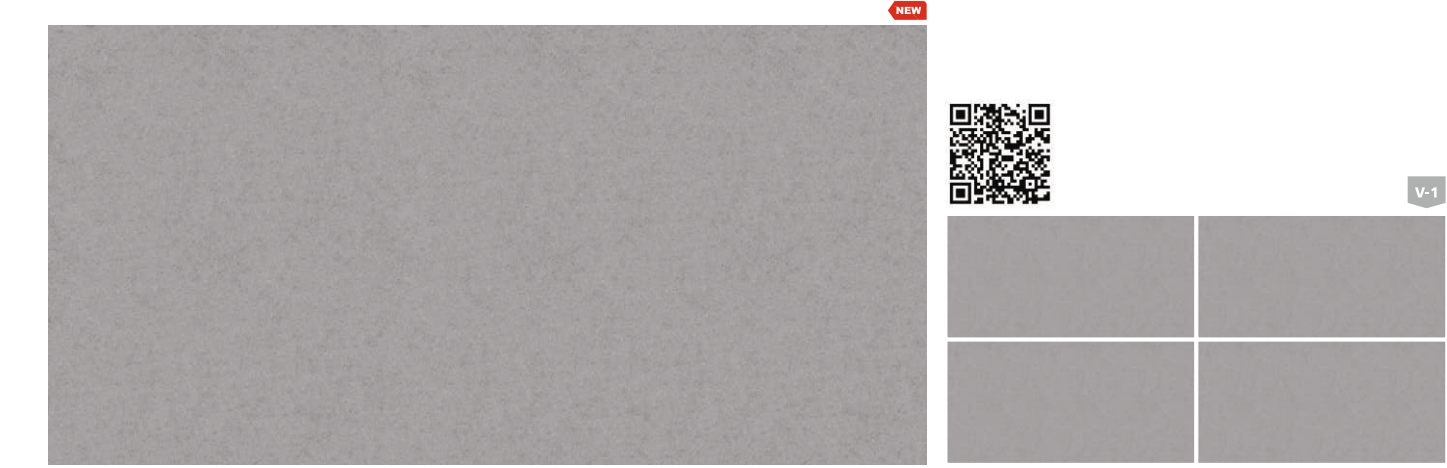


ENORME EMINA GREY | VC | 800X1600MM

- VERSATILE SOLUTIONS
- EASIER TO LAY
- RESISTANT TO CHEMICAL
- FROST RESISTANT
- RESISTANT TO STAINS
- WIDE RANGE

800x1600MM | VC

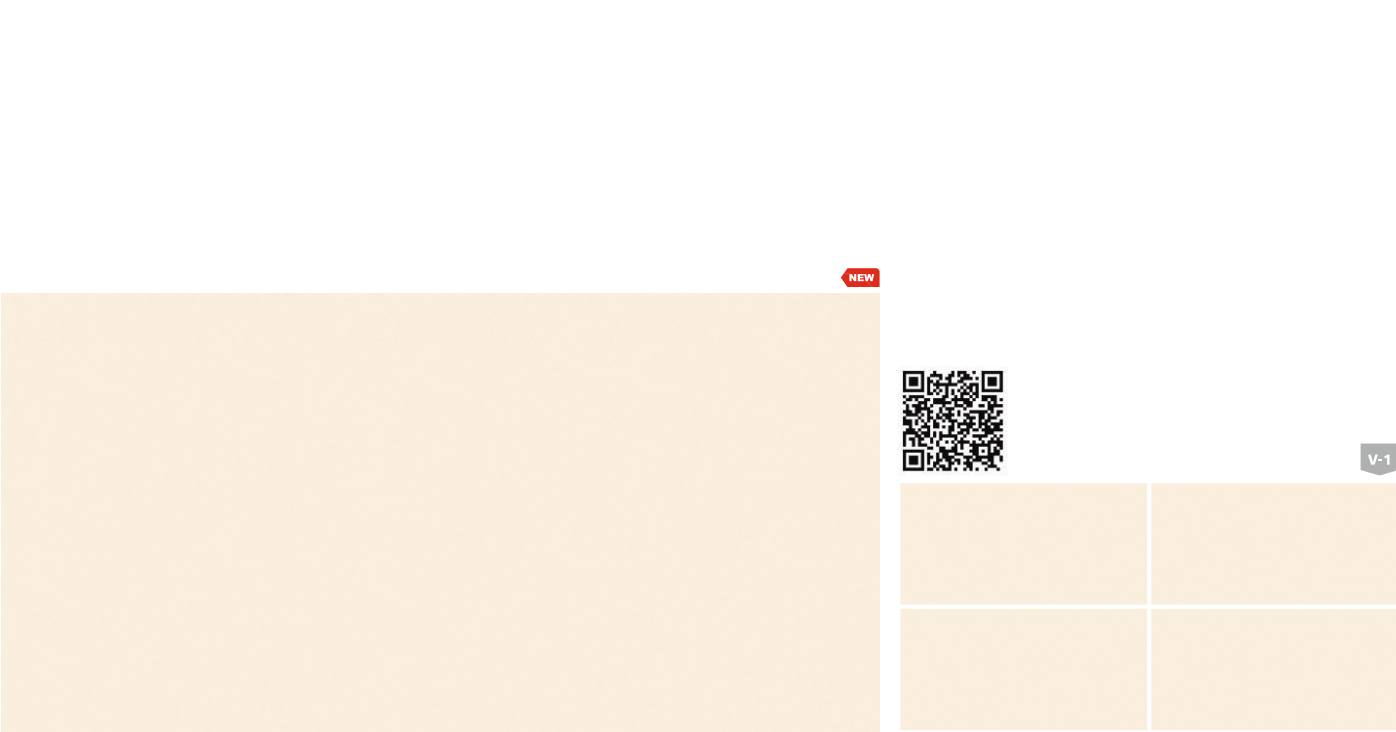

ENORME EMINA BEIGE | VC | 800X1600MM

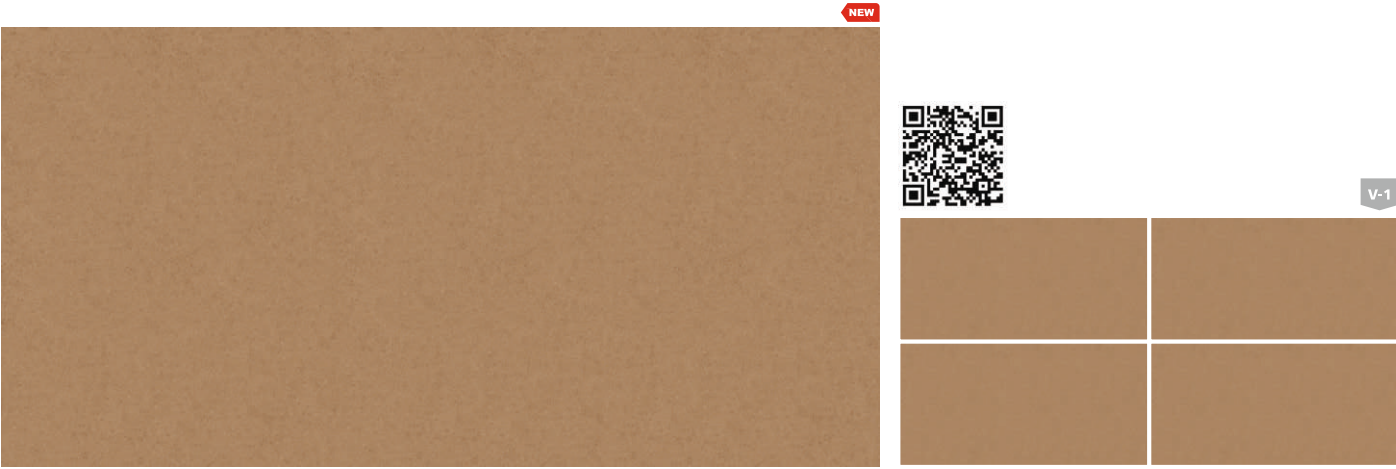

ENORME EMINA BROWN | VC | 800X1600MM






VEILCRAFT (VC) SHIELD

Not only look and style; the buzz word for the Gen X tile is timeless elegance. Here comes the revolutionary patented "VeilCraft (VC) Shield" technology, a 'high abrasion resistant glaze composition', known as VC (VeilCraft) Shield. This is the first ever patented technology in Indian Ceramic Industry. This not only gives you the perfect aesthetics for your space but also the lifelong protection to your floor.


Result Of The abrasion test at 25,000 revolutions as per the PEI Methodology



Natural Granite




Marble



Traditional Tile




VC Shield Tile



Polished Vitrified Tile

Patent Certificate for  
“High Abrasion Resistant Glaze”  
applied on VC Shield Tiles

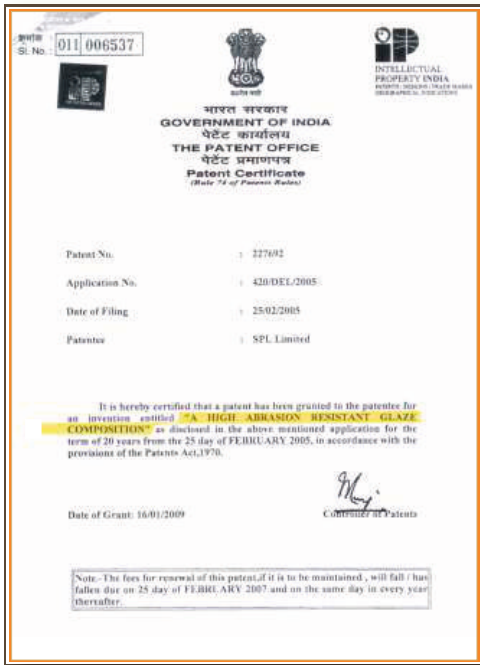

TECHNICAL SPECIFICATION

| PACKING DETAILS FOR GVT TILES |               |                         |                                 |                           |
|-------------------------------|---------------|-------------------------|---------------------------------|---------------------------|
| Nominal Size                  | Thickness(mm) | No. of tiles per carton | Average weight per carton (Kgs) | Coverage area per carton  |
| 800x1600mm                    | 9             | 2                       | 51                              | 2.56 Sq.Mtr / 27.55 Sq.ft |

| TECHNICAL SPECIFICATION FOR GVT TILES                                                              |                                                               |                                                         |                                                         |                                 |
|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|---------------------------------|
| Characteristics                                                                                    | Requirement as per<br>IS 15622 : 2017 < E ≤ 0.08<br>Group Bla | Requirement as per<br>ISO 13006 ≤ 0.5%<br>Group Bla     | Our Values                                              | Test Method                     |
| A) Dimension & Surface Quality                                                                     |                                                               |                                                         |                                                         |                                 |
| I) Length & Width                                                                                  | ± 0.1%                                                        | ± 0.3%                                                  | ± 0.1%                                                  | IS 13630 Part 1/<br>ISO 10545-2 |
| ii) Thickness                                                                                      | ± 5.0%                                                        | ± 5.0%                                                  | ± 4.0%                                                  |                                 |
| iii) Straightness of Side                                                                          | ± 0.1%                                                        | ± 0.3%                                                  | ± 0.1%                                                  |                                 |
| iv) Rectangularity                                                                                 | ± 0.1%                                                        | ± 0.3%                                                  | ± 0.1%                                                  |                                 |
| v) Surface Flatness                                                                                |                                                               |                                                         |                                                         |                                 |
| a) Center curvature (%) ( max.Deviation)                                                           | ± 0.5%                                                        | ± 0.4%                                                  | ± 0.2 %                                                 |                                 |
| b) Edge curvature (%) { max.Deviation)                                                             | ± 0.5%                                                        | ± 0.4%                                                  | ± 0.2 %                                                 |                                 |
| c) Corner warpage (%) ( max.Deviation)                                                             | ± 0.5%                                                        | ± 0.4%                                                  | ± 0.2 %                                                 |                                 |
| vi) Surface Quality                                                                                | Min. 95 % of tiles will be<br>free from visible defects       | Min. 95 % of tiles will be<br>free from visible defects | Min. 95 % of tiles will be<br>free from visible defects |                                 |
| B) Physical Properties                                                                             |                                                               |                                                         |                                                         |                                 |
| I) Water Absorption                                                                                | Av E ≤ 0.08 %,<br>Individual 0.1 max                          | Av ≤ 0.5 %, Individual<br>0.6% max                      | Avg. E≤ 0.08 %                                          | IS 13630 Part 2/ ISO 10545-3    |
| ii) Modulus of Rupture [N/mm2]                                                                     | Av 35, Individual 32 min                                      | Av 35, Individual 32 min                                | Avg, 35 Ind 32                                          | IS 13630 Part 6/ISO 10545-4     |
| iii) Breaking Strength in N                                                                        | Min. 1300                                                     | Min. 1300                                               | Min. 1300                                               |                                 |
| iv) Moisture Expansion in mm/m                                                                     | 0.02                                                          | Test Method Available                                   | 0.02                                                    | IS 13630 Part 3/ISO-10545-10    |
| v) Scratch Hardness of surface (Mohs)                                                              | Min 5                                                         | N/A                                                     | Min.5 (for VC & RT),<br>Min.3 (for Polished)            | IS 13630 Part 13                |
| vi) Resistance to Abrasion of<br>glazed tiles( Class I to V )                                      | Min II                                                        | Abrasion Class &<br>Cycle passed                        | Class-V (for VC & RT),<br>Class-III (for Polished)      | IS 13630 Part 11 /ISO 10545-7   |
| vii) Coefficient of linear thermal expansion<br>from ambient temperature to 100° c                 | 6 X 10 <sup>-6</sup> K <sup>-1</sup> Max                      | Test Method Available                                   | Max 6 X 10 <sup>-6</sup> K <sup>-1</sup> max            | IS 13630 Part 4/ ISO 10545-8    |
| viii) Thermal Shock Resistance                                                                     | 10 cycle min                                                  | Test Method Available                                   | 10 cycle passed                                         | IS 13630 Part 5/ISO-10545-9     |
| ix) Crazing Resistance                                                                             | 4 cycle @ 7.5bar min                                          | Required                                                | 4 cycle passed                                          | IS 13630 Part 9/ISO 10545-11    |
| x) Impact Resistance as Co-efficient<br>of Re stitution                                            | 0.55 min                                                      | Required                                                | Min 0.55                                                | ISO 10545-5                     |
| xi) Frost Resistance                                                                               | Required                                                      | Required                                                | 100 Cycle Passed                                        | IS 13630 Part 10/ISO 10545-12   |
| C) Chemical Resistance (glazed Tiles)                                                              |                                                               |                                                         |                                                         |                                 |
| I) Stain Resistance                                                                                | Min. Class 1 ( For Matt )<br>Min. Class 2 ( For Polished )    | Min Class 3                                             | Min Class-1                                             | IS 13630 Part 8 &ISO 10545-14   |
| ii) Resistance to household chemicals                                                              | Min Class AA                                                  | Min Class GB                                            | Min Class AA                                            | IS 13630 Part 8/ ISO 10545-13   |
| iii) Resistance to acids and alkalis<br>(with exception of hydrofluoric acid<br>and its compounds) | Required if agreed                                            | Declared Value <sup>1</sup>                             | Min Class AA                                            |                                 |

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. “ Technical Specification” for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.



**SOMANY**  
Bathware

# Our PORTFOLIO



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

**SOMANY**

**Ezy Fix**  
TILE ADHESIVE



## HIGH STRENGTH POLYMER MODIFIED TILE ADHESIVE



### BENEFITS

- » READY AND EASY TO USE
- » EXCELLENT BONDING WITH ALL SURFACES
- » FAST SETTING
- » SELF-CURING

### USES

- » FOR FIXING ALL TYPE OF TILES
- » FOR NEW FLOORING AND RENOVATION
- » CAN BE USED FOR TILE ON TILE



NOTE

[illegible]

## NOTE

[illegible]