



Power of Desire



SOMANY

Somany Ceramics Limited : Noida: F-36, Sector-6; Ph.: 0120-4627900.
Ahmedabad: Office no. 7-14, 4th Floor, Aggarwal Mall, Opp. Sola Bhagwat Vidyapeeth, S.G. Road, Sola, Ph.: 079-66042500 to 599
Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913
www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic



Find us at:
www.twitter.com/SomanyCeramic



DURAGRES / CAT / OCTOBER 2021

DURAGRES
Timeless Elegance

SOMANY
Tiles | Bathware

ZAMEEN SE JUDEY

new
arrival

**1200 x
1800mm**

GLAZED VITRIFIED TILES

UNIT-4 FOR SOUTH

MAX
Architectural Surfaces



1200x1800mm

MAX 180 COLLECTION

WE HAVE
REDEFINED
THE MEANING
OF BIG

INDEX

HIGH GLOSS	04
FULL POLISH	08
CARVING	26

1200 X 1800 MM
GLAZED VITRIFIED TILES

SOMANY⁷
DURAGRES

1200 X 1800MM

MAX 180 LUCIDO OMNIA NERO HG

HIGH GLOSS



04




05


MAX 180 LUCIDO NORDEN DARK HG

HIGH GLOSS

1200 X 1800MM

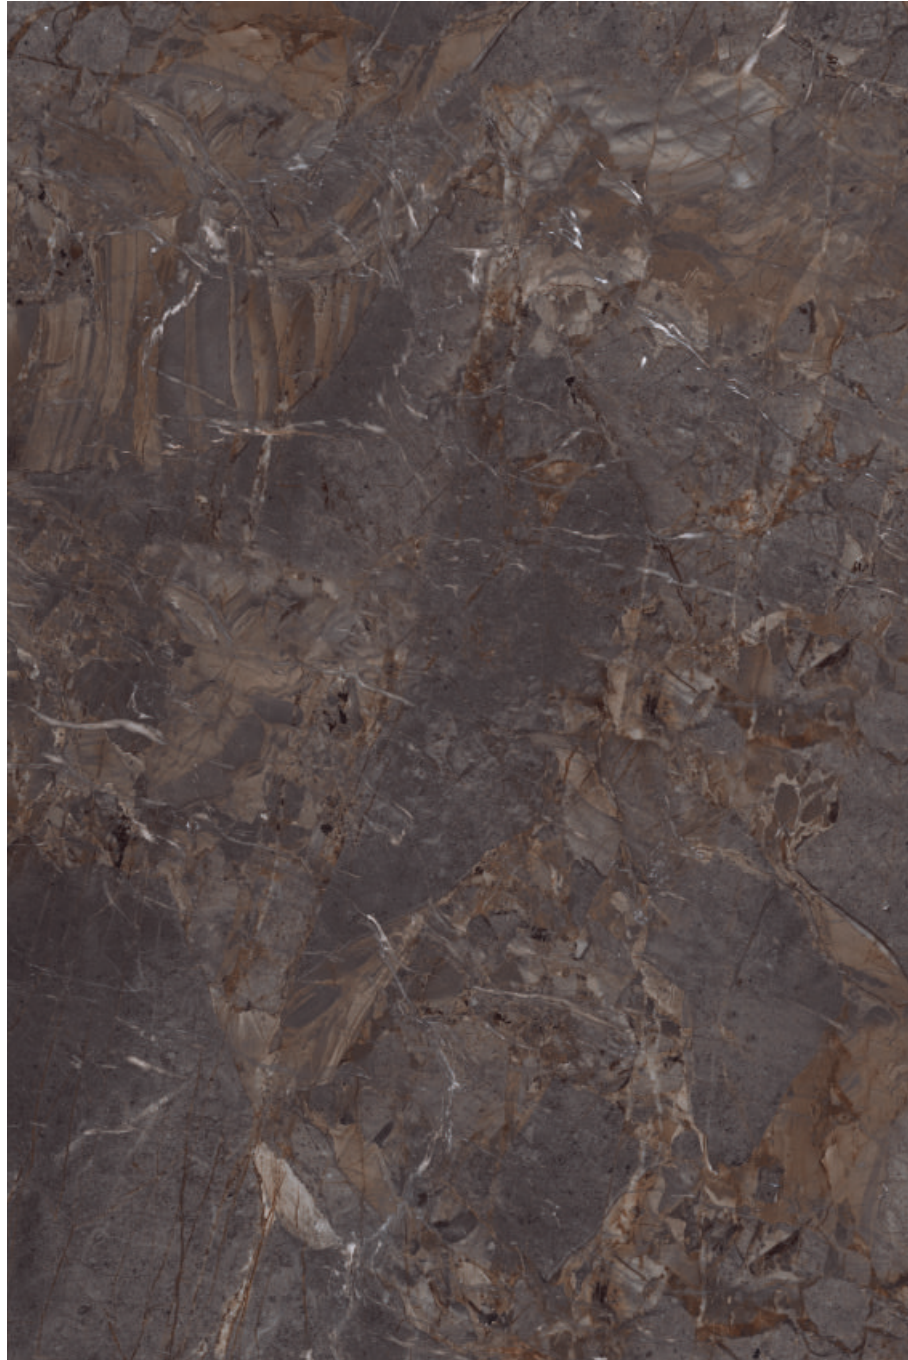


V2

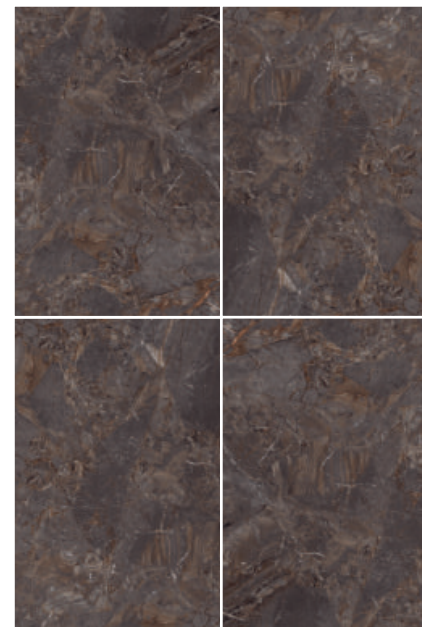


MAX 180 LUCIDO OMNIA NERO HG

HIGH GLOSS

1200 X 1800MM

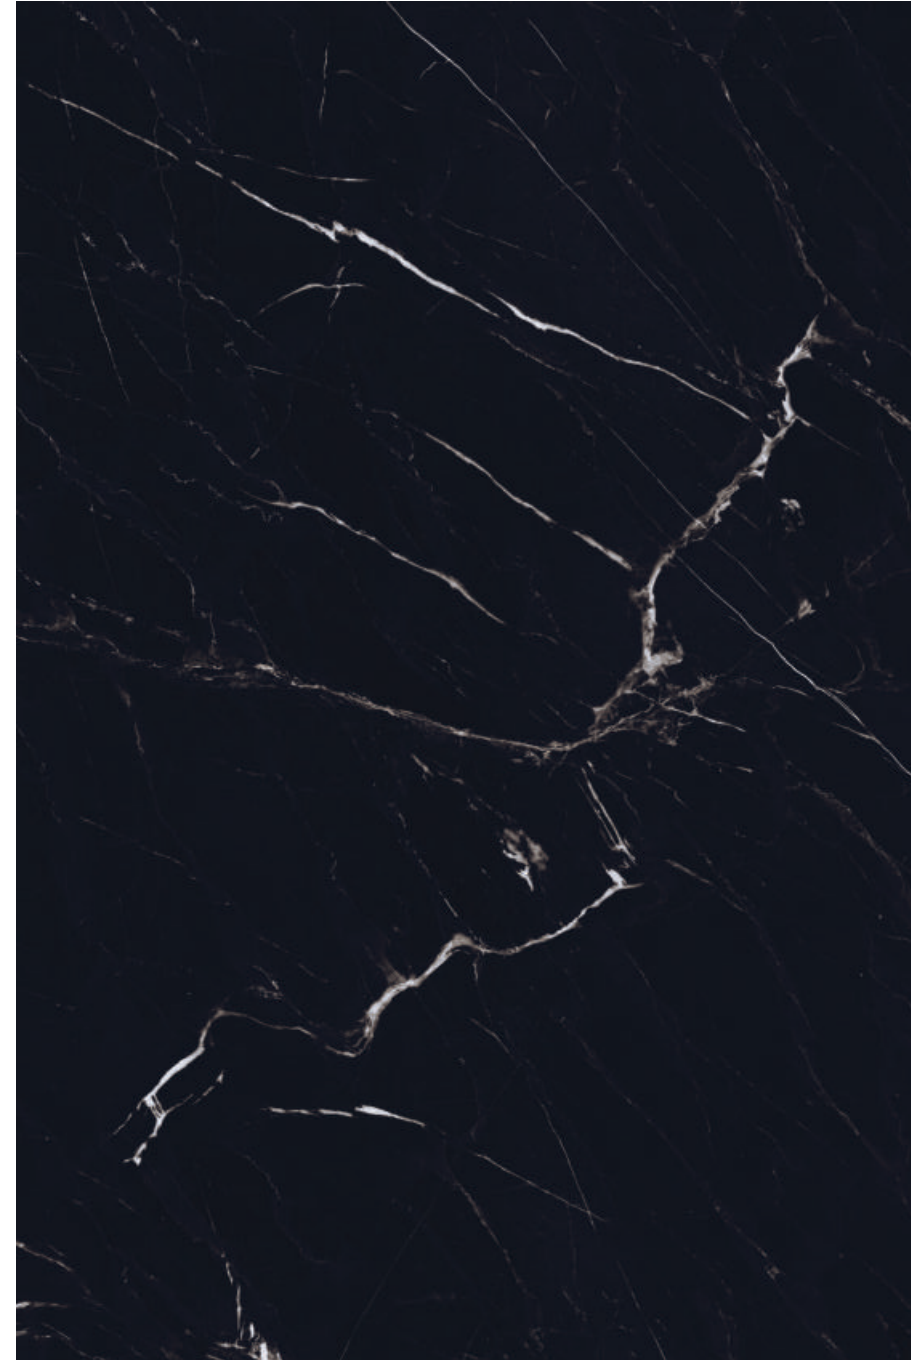

V3

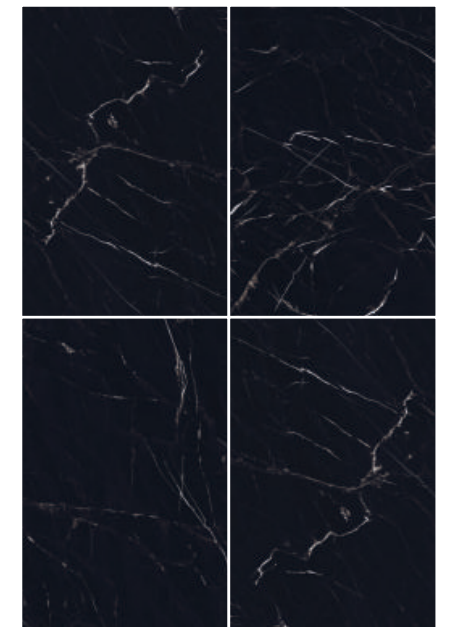

SOMANY
DURAGRES

1200 X 1800MM

MAX 180 AVA ARMANI GREY FP

FULL POLISH



08



09


MAX 180 AVA ARMANI GREY FP

FULL POLISH

1200 X 1800MM



V2 ✦ ✎ ✎

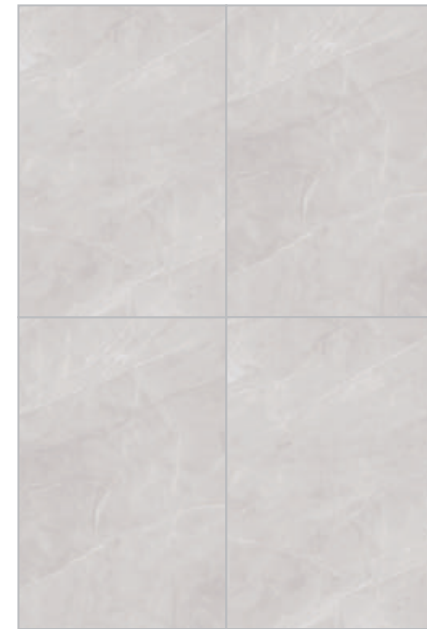

MAX 180 EXTERNA BEIGE FP

FULL POLISH

1200 X 1800MM



V3 ✦ ✎ ✎



SOMANY
DURAGRES

1200 X 1800MM

MAX 180 LUCIDO NORDEN DARK HG

MAX 180 NOVA BRECCIA BEIGE FP


HIGH GLOSS / FULL POLISH







MAX 180 GLACIER WHITE FP


FULL POLISH

1200 X 1800MM



-  STAIN RESISTANT
-  EASY TO LAY
-  EASY TO CLEAN
-  RESISTANT TO ACID
-  FROST RESISTANT

V1   

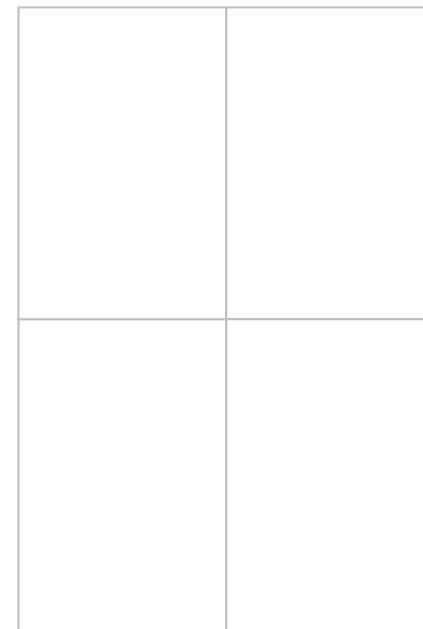






MAX 180 NOVA BRECCIA BEIGE FP

FULL POLISH

1200 X 1800MM



-  STAIN RESISTANT
-  EASY TO LAY
-  EASY TO CLEAN
-  RESISTANT TO ACID
-  FROST RESISTANT

V2   



SOMANY[®]
DURAGRES

1200 X 1800MM

MAX 180 LUCIDO NORDEN DARK HG

MAX 180 ROMA STATUARIO FP


HIGH GLOSS / FULL POLISH



MAX 180 PRIME ATLAS CREMA FP

FULL POLISH

1200 X 1800MM

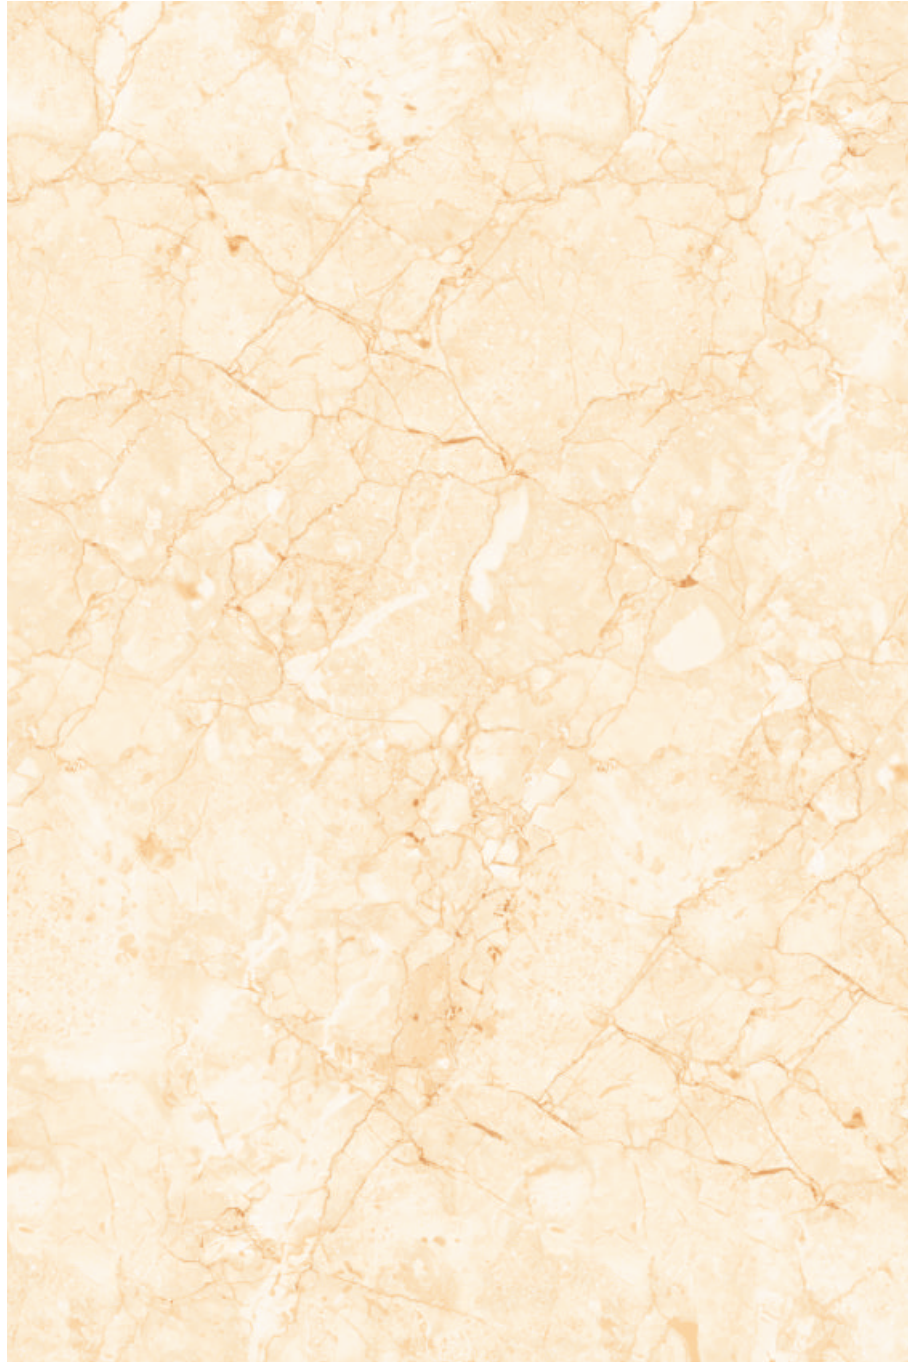

STAIN RESISTANT



EASY TO LAY



EASY TO CLEAN




RESISTANT TO ACID



FROST RESISTANT

V2

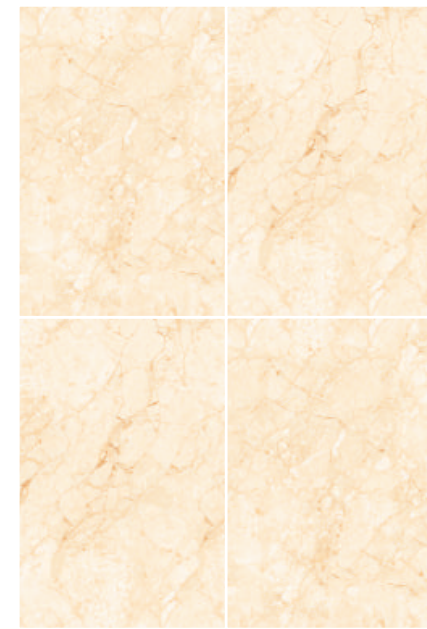

MAX 180 ROMA STATUARIO FP

FULL POLISH

1200 X 1800MM



STAIN RESISTANT



EASY TO LAY



EASY TO CLEAN




RESISTANT TO ACID



FROST RESISTANT

V2

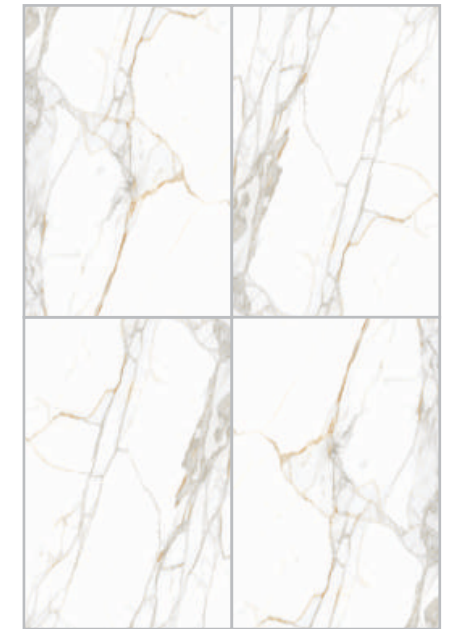

SOMANY
DURAGRES

1200 X 1800MM

MAX 180 SCALEA BEIGE FP

FULL POLISH



MAX 180 REGGIO GREY FP

FULL POLISH

1200 X 1800MM



STAIN RESISTANT



EASY TO LAY



EASY TO CLEAN



RESISTANT TO ACID



FROST RESISTANT

V2



MAX 180 SCALEA BEIGE FP

FULL POLISH

1200 X 1800MM



STAIN RESISTANT



EASY TO LAY



EASY TO CLEAN



RESISTANT TO ACID



FROST RESISTANT

V2



MAX 180 UNO BOTTICCHINO BEIGE FP

FULL POLISH

1200 X 1800MM



STAIN RESISTANT



EASY TO LAY



EASY TO CLEAN



RESISTANT TO ACID



FROST RESISTANT

V2



SOMANY
DURAGRES

SOMANY
DURAGRES

1200 X 1800MM

MAX 180 IMPRESSION ALZATA BEIGE

MATT WITH CARVING



MAX 180 IMPRESSION ALZATA BEIGE

MATT WITH CARVING

1200 X 1800MM



- STAIN RESISTANT
- EASY TO LAY
- EASY TO CLEAN
- RESISTANT TO ACID
- FROST RESISTANT

V2



MAX 180 IMPRESSION BULGARY

MATT WITH CARVING

1200 X 1800MM



- STAIN RESISTANT
- EASY TO LAY
- EASY TO CLEAN
- RESISTANT TO ACID
- FROST RESISTANT

V2




Technical Specification

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.

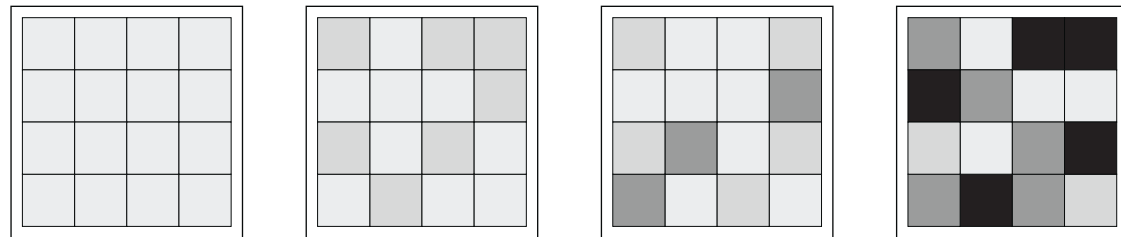

V1 Uniform Appearance **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follow:

V1 Minimal Variation **V3** Random Variation **V2** Slight Variation **V4** Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles.

For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder

Notes

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixd. Complaints will not be entertained for Borders, Highlighters & Motifs.

PACKAGING DETAIL FOR 1200x1800MM GVT TILES				
Nominal Size(mm)	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton
1200 x 1800	9.0	87.00	2	4.32sq.mtr. / 46.50sq.ft.

TECHNICAL SPECIFICATION FOR 1200x1800MM GVT TILES				
Characteristics	Requirement as per IS 15622 :2017 0.08 < E ≤ 3% Group Blb	Requirement as per ISO 13006 ≤ 0.5% Group Bla	Our Values	Test Method
A) Dimension & Surface Quality				
i) Length & Width	± 0.10%	± 0.3%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	± 0.10%	± 0.3%	± 0.10%	
iv) Rectangularity	± 0.10%	± 0.3%	± 0.10%	
v) Surface Flatness				
a) Center curvature (%) (max.Deviation)	± 0.50%	± 0.4%	± 0.2 %	
b) Edge curvature (%) { max.Deviation)	± 0.50%	± 0.4%	± 0.2 %	
c) Corner warpage (%) (max.Deviation)	± 0.50%	± 0.4%	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Av. 0.08<E ≤ 3 %, Individual 3.3 max	Av ≤ 0.5 %, Individual 0.6% max	Avg. E≤ 0.08%	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Av 30, Individual 27 min	Av 35, Individual 32 min	Avg.35	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1100	1300	Min, 1500	
v) Scratch Hardness of surface (Mohs)	Min 5	N/A	Min-5(for Matt & RT), Min.3(for Polished)	IS 13630 Part 13
vi) Resistance to Abrasion of glazed tiles(Class I to V)	Min II	Abrasion Class & Cycle passed	Class-V (for Matt & RT), Class - III(for polished)	IS 13630 Part 11 /ISO 10545-7
vii) Coefficient of linear thermal expansion from embiant temperature to 100° C	7 X 10 ⁻⁶ K ⁻¹ max	Test Method Available	Max 6 X 10 ⁻⁶ K ⁻¹ max	IS 13630 Part 4/ ISO 10545-8
viii) Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9
ix) Crazing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
x) Impact Resistance as Co-efficient of Re stitution (COR)	0.55 min	Test Method Available	Min 0.55	IS 13630 Part 14/ISO 10545-5
xi) Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistance (glazed Tiles)				
i) Stain Resistance	Min Class 1	Min Class 3	Min Class-1(For Matt), Class-2(for polished)	IS 13630 Part 8 &ISO 10545-14
ii) Resistance to household chemicals	Min Class AA	Min B	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value	Min Class AA	