



SOMANY

Somany Ceramics Limited : Noida: F-36, Sector-6; Ph.: 0120-4627900.
Ahmedabad: Office no. 7-14, 4th Floor, Aggarwal Mall, Opp. Sola Bhagwat Vidyapeeth, S.G. Road, Sola, Ph.: 079-66042500 to 599
Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913
www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic



Find us at:
www.twitter.com/SomanyCeramic



DURAGRES / CAT / JULY-2020

SOMANY
Tiles | Bathware

ZAMEEN SE JUDEY

800x800MM



UNIT - IV

**FULL BODY GLAZED
VITRIFIED TILES**

SOMANY
DURAGRES



▶ I N D E X

LUCIDO
800x800mm

04

FULL POLISH
800x800mm

07

MATT FINISH
800x800mm

14

RUSTIC FINISH
800x800mm


16

FULL POLISH

Tiles shown:
800x800mm

**MARBO
ELEGANT
LUCINA CAFÉ
FP**

LUCIDO — 800x800MM COLLECTION

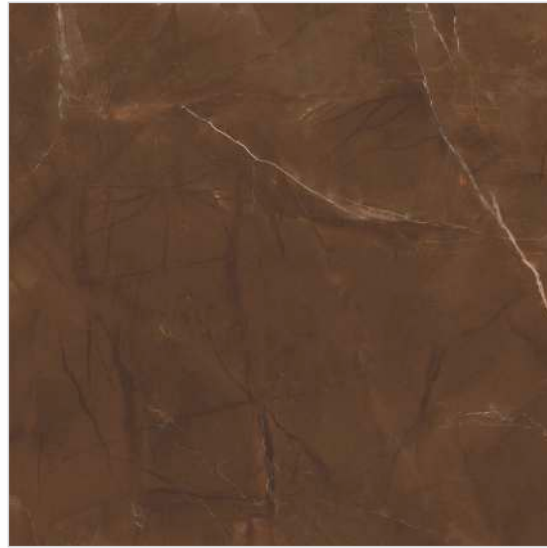

MARBO LUCIDO ACE ARMANI CAFÉ
High Gloss, 800x800mm



MARBO LUCIDO BLACK PORTORO
High Gloss, 800x800mm



MARBO LUCIDO DEEP OCEAN BLUE
High Gloss, 800x800mm

FULL POLISH — 800x800MM COLLECTION



MARBO ELEGANTE ACE ARMANI CREMA FP
Full Polish, 800x800mm



MARBO ELEGANTE ACE ARMANI GREY DARK FP
Full Polish, 800x800mm



MARBO ELEGANTE BRECCIA NATURAL FP
Full Polish, 800x800mm



MARBO ELEGANTE LUCINA CAFÉ FP
Full Polish, 800x800mm

FULL POLISH — 800x800MM COLLECTION



MARBO ELEGANTE MALLORCA BEIGE FP V2
Full Polish, 800x800mm



MARBO ELEGANTE REGINA BEIGE FP V2
Full Polish, 800x800mm



MARBO ACE ARMANI GREY LIGHT FP V4
Full Polish, 800x800mm



MARBO BOTTICHINO BROWN FP V4
Full Polish, 800x800mm

FULL POLISH — 800x800MM COLLECTION



MARBO BOTTICHINO FP V4
Full Polish, 800x800mm



MARBO DAINO BEIGE FP V4
Full Polish, 800x800mm



MARBO DAINO GREY FP V4
Full Polish, 800x800mm



MARBO ENTOX BEIGE FP V4
Full Polish, 800x800mm

SOMANY⁷
DURAGRES



Tiles shown:
800x800mm


**MARBO
ENTOX
NATURAL FP**

FULL POLISH

FULL POLISH — 800x800MM COLLECTION



MARBO ENTOX NATURAL FP
Full Polish, 800x800mm



MARBO GLACIER WHITE FP
Full Polish, 800x800mm




MARBO LAURENCE DARK FP
Full Polish, 800x800mm



MARBO LAURENCE LIGHT FP
Full Polish, 800x800mm



FULL POLISH — 800x800MM COLLECTION

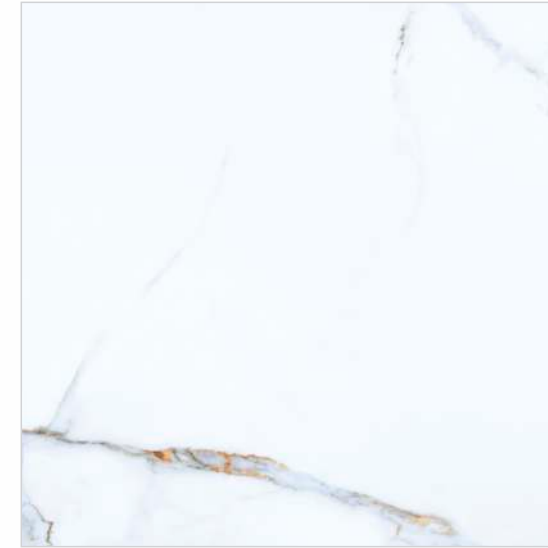

MARBO NUOVO STATUARIO FP
Full Polish, 800x800mm



MARBO SEGESTA BIANCO FP
Full Polish, 800x800mm



MARBO SEGESTA GOLD FP
Full Polish, 800x800mm



MARBO STATUARIO FP
Full Polish, 800x800mm



MATT FINISH — 800x800MM COLLECTION



MARBO BOTTICHINO VC
Matt, 800x800mm



MARBO DAINO BEIGE VC
Matt, 800x800mm



MARBO DAINO GREY VC
Matt, 800x800mm




MARBO SEGESTA GOLD FP
Full Polish, 800x800mm



MATT FINISH — 800x800MM COLLECTION

SOMANY
DURAGRES

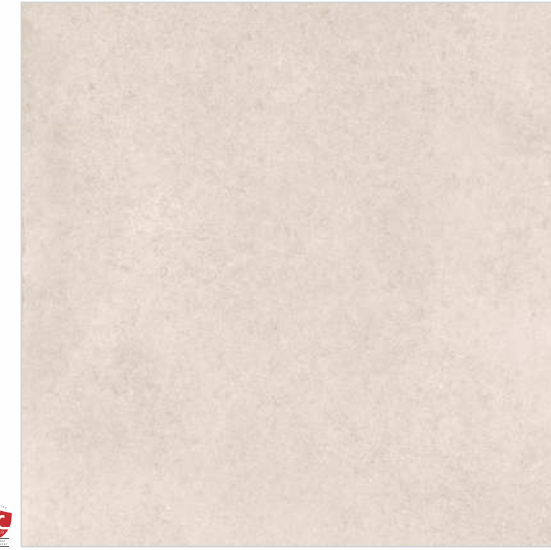

MARBO NEVADA GREY
Matt, 800x800mm



MARBO IMPRESSION SORRENTO BROWN
Carving, 800x800mm



MARBO IMPRESSION TORTORA GRIS
Carving, 800x800mm



RUSTIC FINISH


Tiles shown:
800x800mm

**MARBO
SANDSTONE
BROWN**

RUSTIC FINISH — 800x800MM COLLECTION



MARBO CRANFIS BRONCE
Rustic, 800x800mm

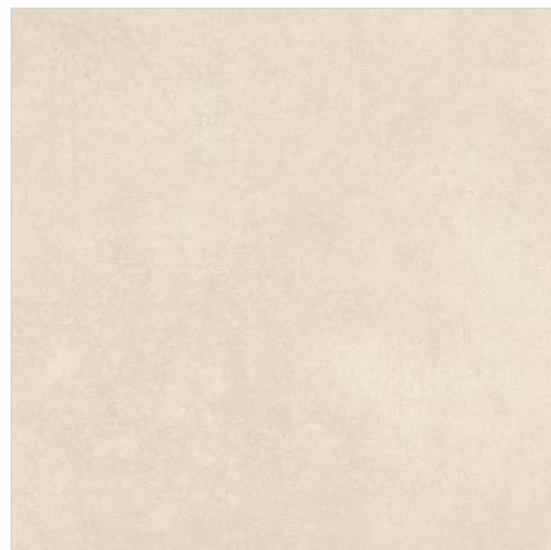

MARBO CRANFIS MARFIL
Rustic, 800x800mm



MARBO IRVEN BEIGE
Rustic, 800x800mm




MARBO IRVEN GREY
Rustic, 800x800mm




RUSTIC FINISH — 800x800MM COLLECTION


SOMANY
DURAGRES

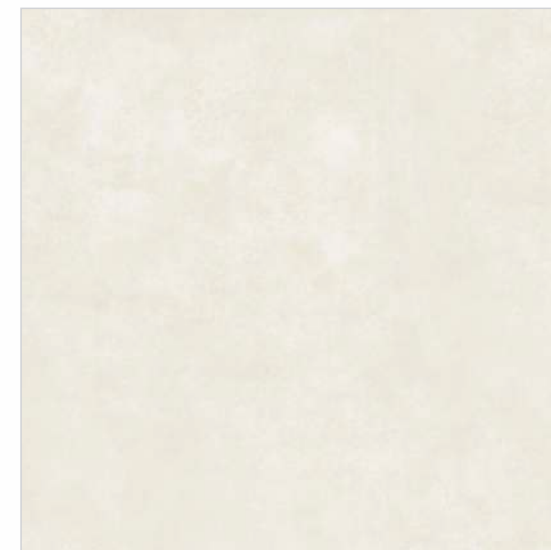

MARBO LISTON BEIGE
Rustic, 800x800mm

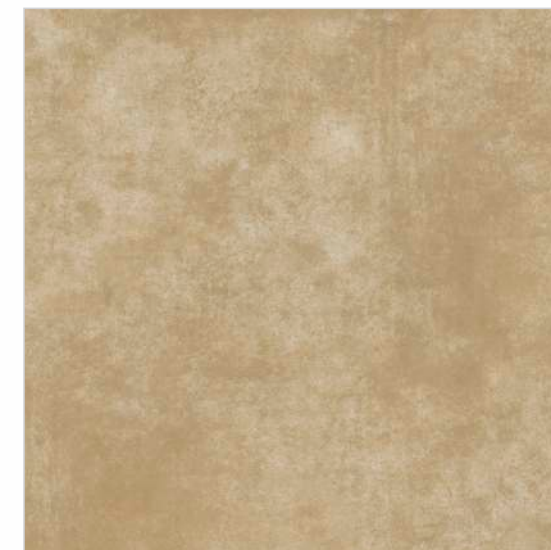

MARBO LISTON BROWN
Rustic, 800x800mm

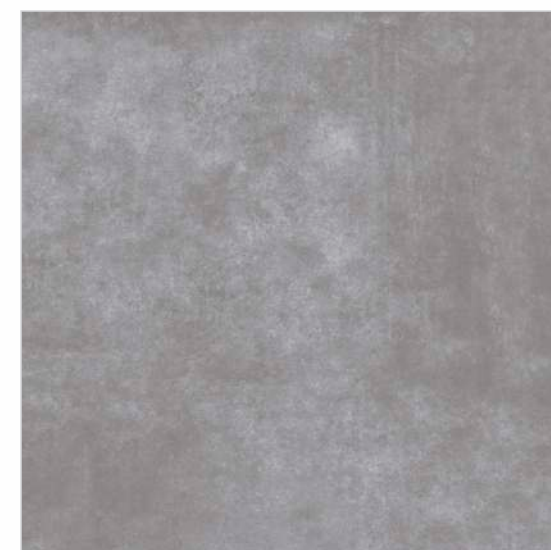

MARBO LISTON GREY DARK
Rustic, 800x800mm



MARBO LISTON LIGHT GREY
Rustic, 800x800mm



RUSTIC FINISH — 800x800MM COLLECTION



MARBO SANDSTONE BEIGE
Rustic, 800x800mm



MARBO SANDSTONE BROWN
Rustic, 800x800mm



MARBO SANDSTONE LIGHT GREY
Rustic, 800x800mm



MARBO SANDSTONE DARK GREY
Rustic, 800x800mm



RUSTIC FINISH — 800x800MM COLLECTION

SOMANY
DURAGRES



MARBO TALLADO GREY
Rustic, 800x800mm



MARBO VERANDA BEIGE
Rustic, 800x800mm



MARBO TERRAIN BEIGE
Rustic, 800x800mm



MARBO TERRAIN COTTO
Rustic, 800x800mm






DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.

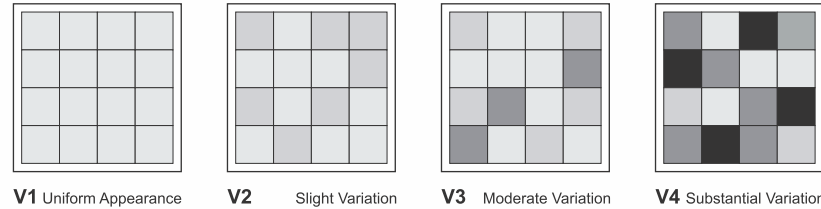

V1 Uniform Appearance **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation
The classification is as follows:
V1 Minimal Variation **V2** Random Variation **V3** Slight Variation **V4** Substantial Variation




While laying the tiles please follow the arrow on the back of the tiles.
For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder




VEILCRAFT (VC) SHIELD

Not only look and style; the buzz word for the Gen X tile is timeless elegance. Here comes the revolutionary patented "VeilCraft (VC) Shield" technology, a 'high abrasion resistant glaze composition', known as VC (VeilCraft) Shield. This is the first ever patented technology in Indian Ceramic Industry. This not only gives you the perfect aesthetics for your space but also the lifelong protection to your floor.

Result Of The abrasion test at 25,000 revolutions as per the PEI Methodology

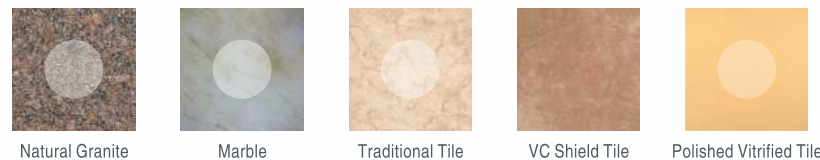

Patent Certificate for "High Abrasion Resistant Glaze" applied on VC Shield Tiles

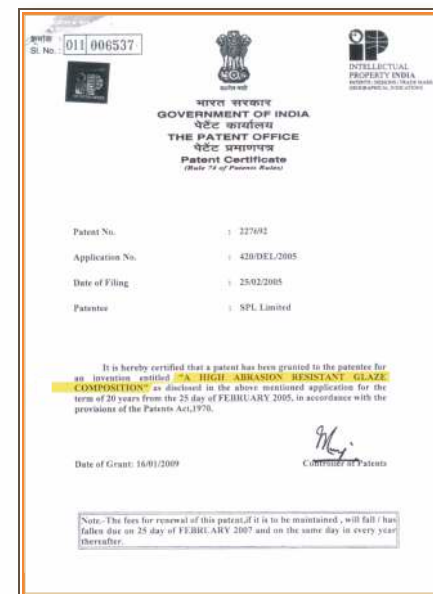

PACKAGING DETAIL FOR 800x800MM FLOOR TILES				
Nominal Size	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton
800x800MM	9.0 mm	38.5 Kg.	3 Pcs	1.92 Sq.mt / 20.67 Sq.ft

TECHNICAL SPECIFICATIONS FOR 800x800MM FLOOR TILES				
Characteristics	Requirement as per IS 15622 :2017 0.08 < E ≤ 3% Group B I b	Requirements as per ISO 13006 ≤ 0.5% Group Bla	Our Values	Test Method
A) Dimension & Surface Quality				
i) Length & Width	±0.10%	±0.5%	±0.10%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	±0.10%	±0.50%	±0.10%	
iv) Rectangularity	±0.10%	±0.60%	±0.10%	
v) Surface Flatness				
a) Center curvature (%) (max.Deviation)	±0.50 %	±0.50 %	±0.2 %	
b) Edge curvature (%) (max.Deviation)	±0.50 %	±0.50 %	±0.2 %	
c) Corner warpage (%) (max.Deviation)	± 0.50 %	± 0.50 %	± 0.2 %	
vi) Surface Quality	>95 % free from visible defects	>95 % free from visible defects	>95 % free from visible defects	
B) Physical Properties				
i) Water Absorption	Av 0.08 < E ≤ 3 %, Individual 3.3 max	Av ≤ 0.5 %, Individual 0.6% max	Av E ≤ 0.08 %	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm ²]	Av 30, Individual 27 min	Av 35, Individual 32 min	Avg. 35	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1100	1300	Min 1500	
iv) Moisture Expansion in mm/m	0.02	Declared Value ^f	N.A.	IS 13630 Part 3/ISO-10545-10
v) Scratch Hardness of surface (Mohs)	Min 5	N.A.	Min-6 (For VC), Min-5 (For Rustic), Min-3 (For Polished)	IS 13630 Part 13
vi) Surface Abrasion Resistance	Min II	Abrasion Class & Cycle passed	Class V(for VC), Class IV(for Rustic), Class III(for Polished)	IS 13630 Part 11 /ISO 10545-7
vii) Coefficient of linear thermal expansion from ambient temperature to 100° C	7 X 10 ⁻⁶ K ⁻¹	Declared Value ^f	Max. 6 X 10 ⁻⁶ K ⁻¹	IS 13630 Part 4/ ISO 10545-8
viii) Thermal Shock Resistance	10 cycle min	Passed According to EN-ISO 10545-1 ^g	10 cycle Passed	IS 13630 Part 5/ISO-10545-9
ix) Crazeing Resistance	4 cycle @ 7.5bar min	Passed According to EN-ISO 10545-1 ^g	4 cycle passed	IS 13630 Part 9/ISO 10545-11
x) Impact Resistance as Co-efficient of Restitution	0.55 min	Declared Value ^f	0.75-0.90	ISO 10545-5
xi) Frost Resistance	Required	Passed According to EN-ISO 10545-1 ^g	100 Cycle passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistance (glazed Tiles)				
i) Stain Resistance	Min Class-1	Min Class-3	Min Class-1(For Matt), Class-2 (For polished)	IS 13630 Part 8 & ISO 10545-14
ii) Resistance to household chemicals	Min Class AA	Min Class GB	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value ^f	Min Class AA	

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. "Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.