DURASTONE

MONTARO
collection

400 x 400mm

NEW ARRIVAL
—
SEPT 2025

UNIT 03

SOMANY



NEW ARRIVAL VOL 1 | SEPT 2025

UNIT 03

SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

MONTARO COLLECTION

Born from the soul of stone, Durastone by Somany introduces the Montaro Collection—where every tile echoes nature's timeless character, transforming outdoor spaces into grounded expressions of art. Available in a compact 400×400mm format with a 11.8mm thickness and a subtle matt finish, each piece captures the authentic texture of natural stone through rich earthy tones and nuanced patterns. From welcoming porches to romantic pergolas, enchanting gazebos to artistic trellises, these tiles boast remarkable chromatic properties that remain unfazed by UV exposure. In quiet moments and vibrant gatherings, Montaro transforms outdoor living into a lasting experience—resilient, refined, and enduringly sophisticated.





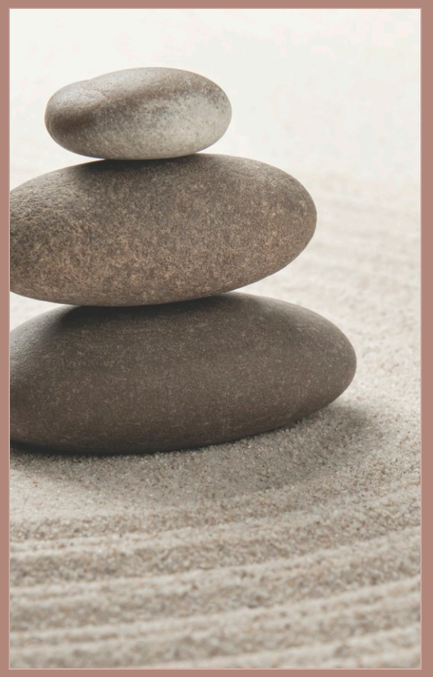

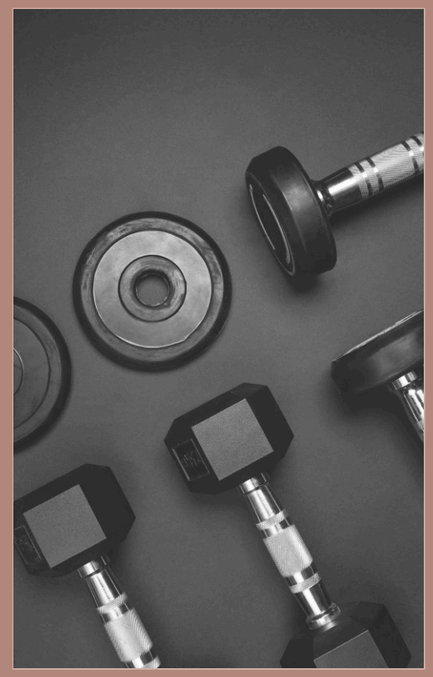

TECHNICAL FEATURES

- ANTI SKID
- EASY TO CLEAN & MAINTAIN
- CHROMATIC PROPERTIES
- CHEMICAL RESISTANT
- FROST RESISTANT
- HIGH FLEXURAL STRENGTH
- WEAR RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- INDOOR & OUTDOOR
- ECO FRIENDLY & RECYCLABLE

APPLICATION AREAS

- RESIDENTIAL AREAS
- COMMERCIAL AREAS
- HOSPITALS
- SHOPS AND MALLS
- HOTELS AND RESTAURANTS
- SCHOOLS AND COLLEGES
- OUTDOOR FURNITURE
- PUBLIC PLACES
- INDUSTRIAL AREAS
- PHARMACEUTICALS AREAS
- DIAGNOSTICS & CHEMICAL LABS





DURASTONE

Redefine your outdoors with 400×400mm vitrified tiles in a 11.8mm thickness, designed to echo the raw strength of stone while conquering demanding environments. Engineered for heavy foot traffic and extreme weather conditions, they maintain their contemporary charm through years of relentless use. Perfect for pathways, terraces, and garden sit-outs, these tiles bring uncompromising resilience and refined character to every outdoor space.

SUITABLE FOR OUTDOOR AREAS

SUITABLE FOR HIGH TRAFFIC AREAS

STRONG & DURABLE

400x 400mm

Thickness **11.8mm**

FLOOR: **AERO BROWN DECOR & AERO BROWN**
SIZE: 400X400mm

ULTRA STRONG
OUTDOOR VITRIFIED TILES







AERO BROWN DECOR



AERO BROWN



BRAX MOUSE BROWN DECOR

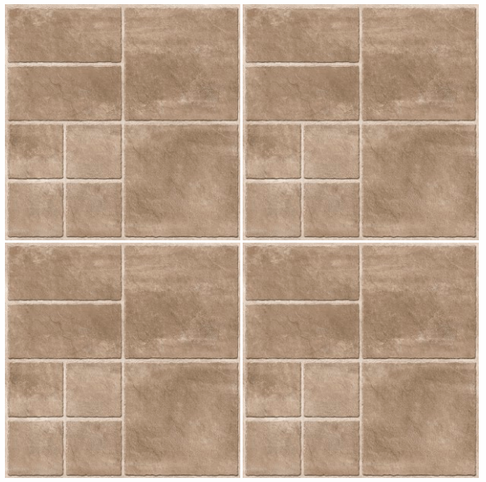

BRAX MOUSE BROWN



BRAX GREY DECOR

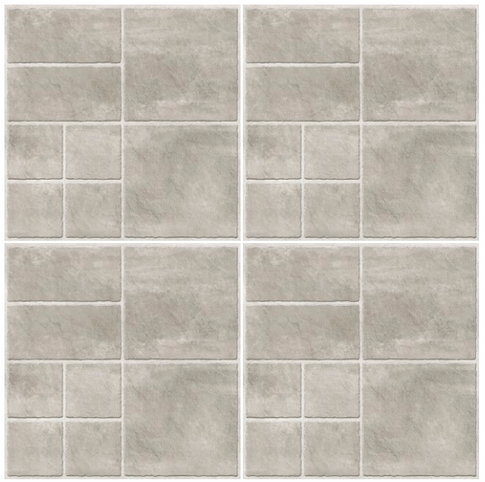

BRAX GREY

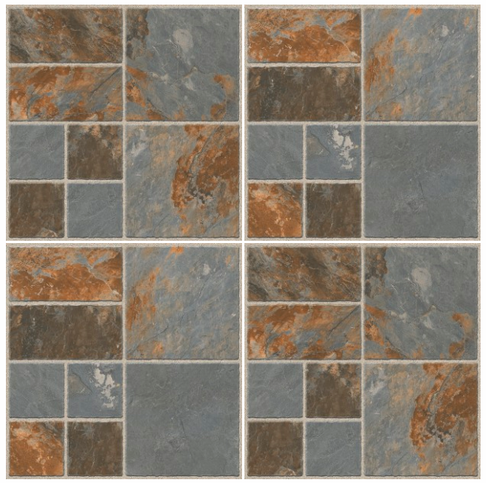

MARFIK RUST

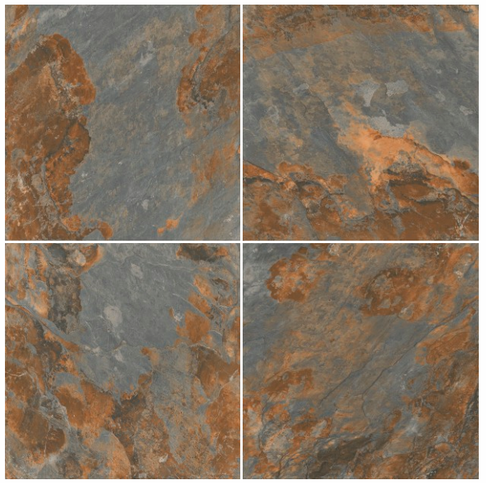

MARFIK RUST DECOR

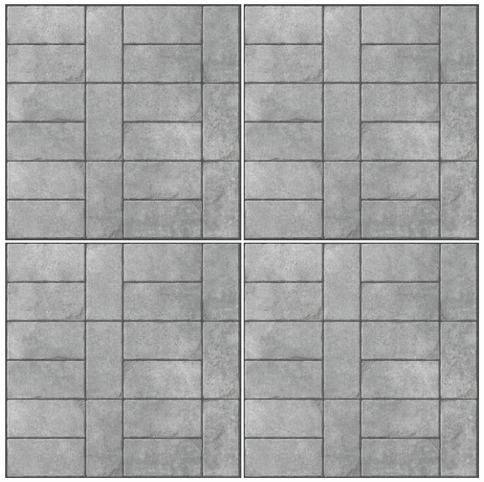

ALYA GREY

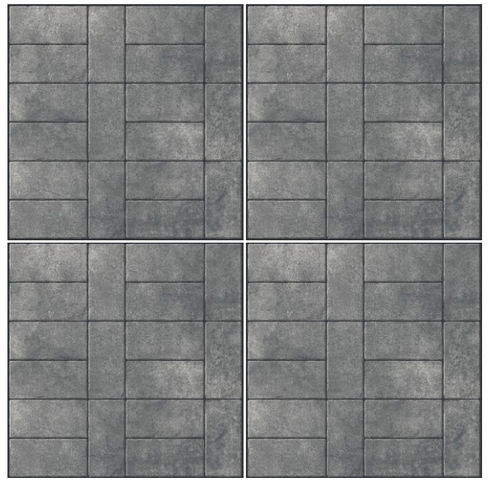

ALYA NERO

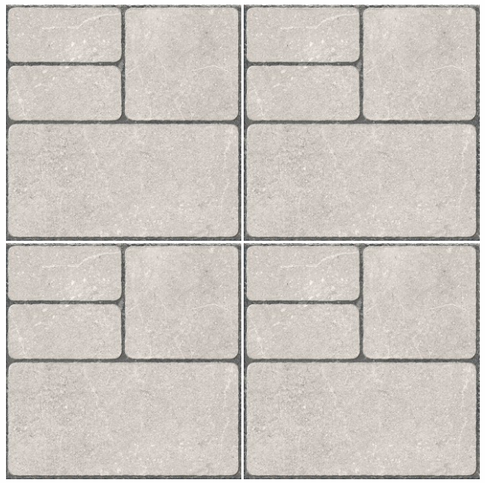

CIRO WHITE



CORTEZ NATURAL

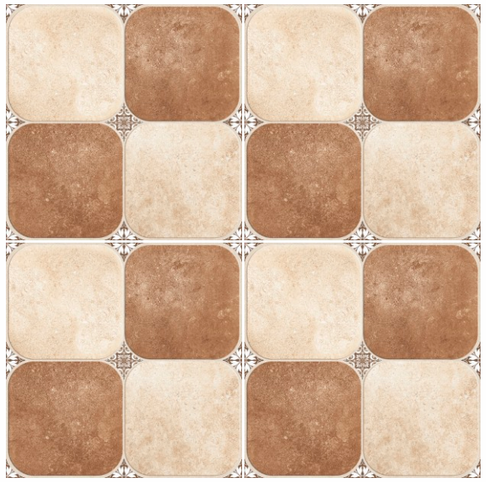

BUZON BROWN

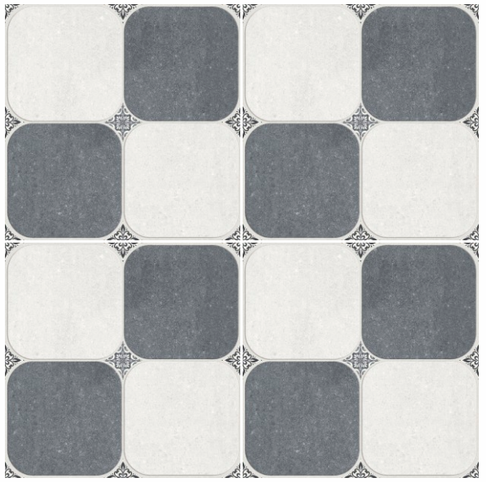

BUZON GREY



COLSEN GREY

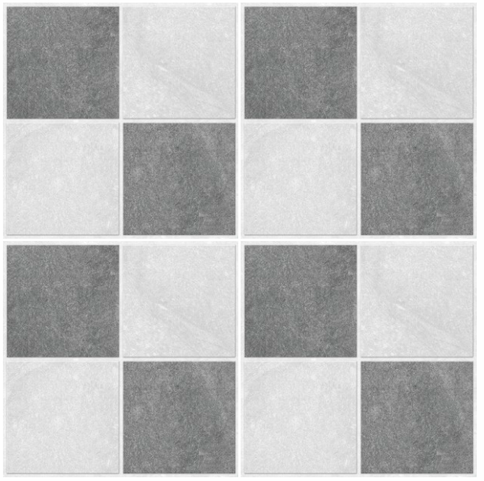

BENTO GREY

FLOOR: **FELIS BROWN DECOR & FELIS BROWN**
SIZE: 400X400mm

ULTRA STRONG
OUTDOOR VITRIFIED TILES







BOLIN BEIGE DECOR

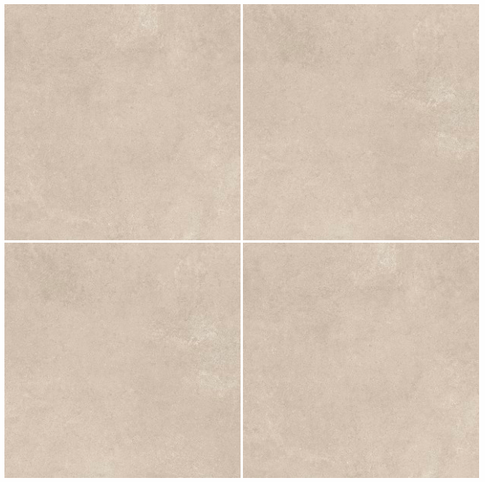

BOLIN BEIGE



FORLI NATURAL DECOR



FORLI NATURAL



FELIS BROWN DECOR



FELIS BEIGE



FELIS BROWN

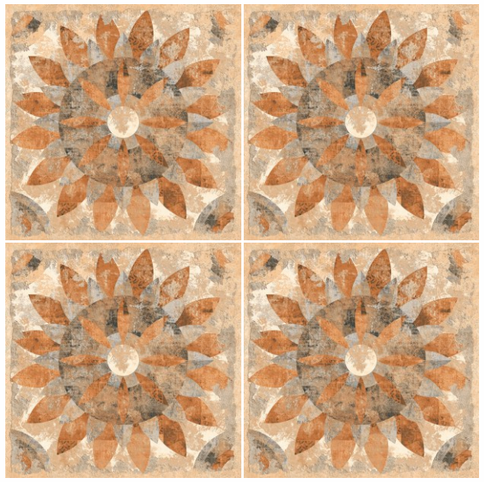

KRION BROWN DECOR 01



KRION BROWN DECOR 02

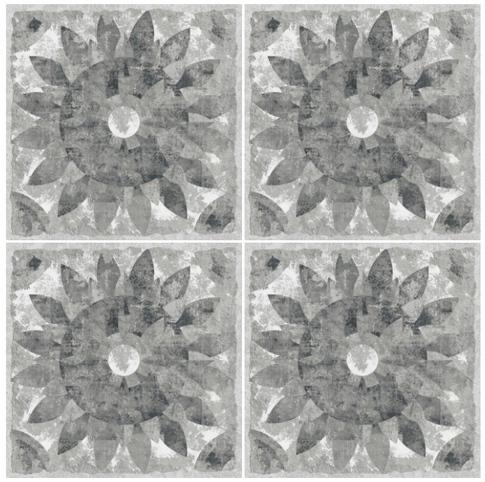

KRION GREY DECOR 01

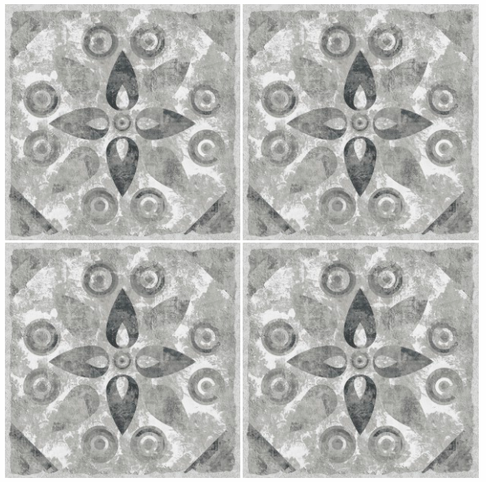

KRION GREY DECOR 02

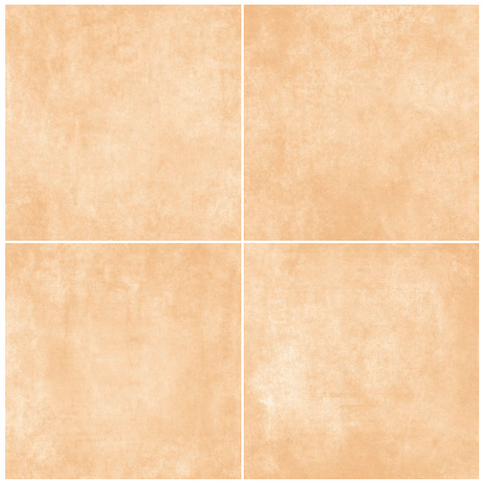

KRION BEIGE

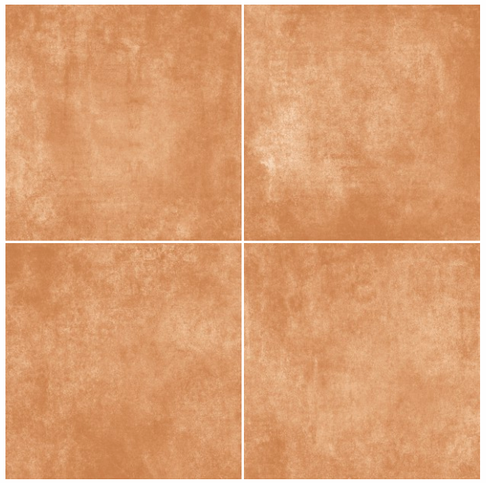

KRION BROWN

KRION BIANCO

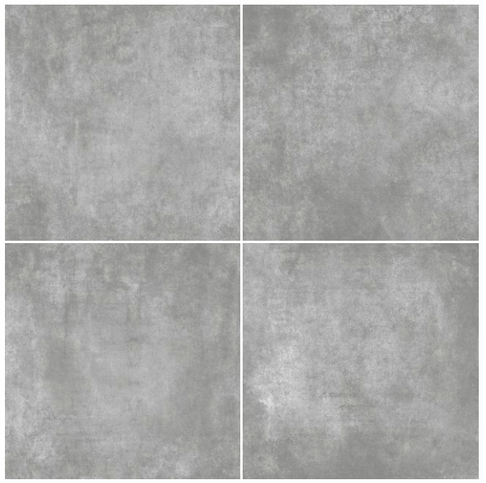

KRION GREY



GORIS BEIGE



MIRA BROWN

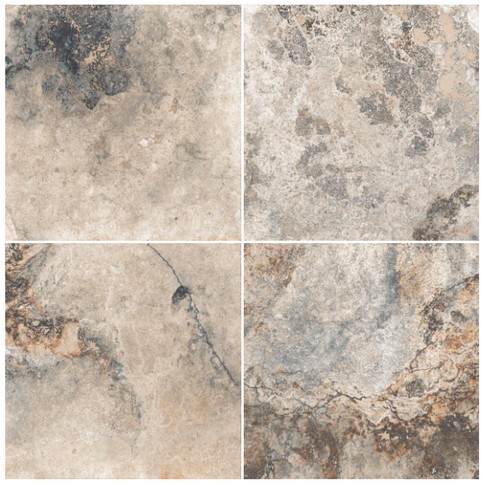

PETROS NATURAL



FLOOR: **MIRA BROWN** SIZE: 400X400mm

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.

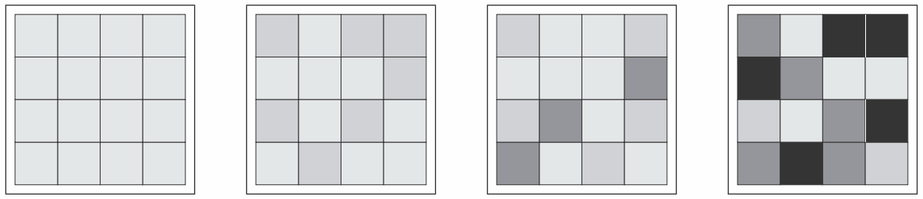

V1 Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation V3 Moderate Variation V4 Substantial Variation

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR MONTARO COLLECTION				
Nominal Size	**Thickness**	**Avg. Wt. Per Box (Kg.)**	**No. of Tiles Per Box**	**Coverage Area Per Box**
400x400mm (MONTARO)	11.8mm	20.0 kg	5	0.80 sq meter / 8.61sq feet

TECHNICAL SPECIFICATION FOR MONTARO COLLECTION				
Characteristics	**Requirement as per ISO 13006:2018 ≤ 0.5% Group B I a**	**Requirement as per IS 15622 :2017 0.08 < E < 3% Group B I b**	**Our value**	**Test Method**
Dimension & Surface Quality				
Length & Width	± 0.3%	± 0.1%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
Thickness	± 5.0%	± 5.0%	± 4.0%	
Straightness of Side	± 0.30%	± 0.1%	± 0.10%	
Rectangularity	± 0.30%	± 0.1%	± 0.10%	
Surface Flatness				
Center curvature (%) (max.Deviation)	± 0.40%	± 0.5%	± 0.2%	
Edge curvature (%) (max.Deviation)	± 0.40%	± 0.5%	± 0.2%	
Corner warpage (%)(max.Deviation)	± 0.40%	± 0.5%	± 0.2%	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	Avg. 0.5 %, Individual 0.6% max	Avg. 0.08< E < 3 %, Individual 3.3 max	Avg. < 0.5 %	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm^2]	Avg. 35, Individual 32 min	Avg. 30, Individual 27 min	Avg.> 35	IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	Min 1300 N	Min 1100 N	Min 2500 N	
Moisture Expansion in mm/m	Test Method Available	0.02	Max,0.02	IS 13630 Part 3/ISO-10545-10
Scratch Hardness of surface (Mohs)	N/A	Min. 5	Min. 6	IS 13630 Part 13
Surface Abrasion Resistant	Min Class II	Min II	Gr IV	IS 13630 Part 11/ISO 10545-Part 7
Coefficient of linear thermal expansion from ambient temperature to 100° C	Test Method Available	Max 7 X 10 $^{-6}$ K^{-1} max	Max 6 X 10 $^{-6}$ K^{-1} max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistant	Required	10 cycle Min	10 cycle passed	IS 13630 Part 5/ISO-10545-9
Crazing Resistant	N/A	4 cycle @ 7.5bar min	4 cycle passed	IS 13630 Part 9/ISO 10545-11
Impact Resistant as Co-efficient of Restitution (COR)	Test Method Available	0.55 Min	Min 0.55	IS 13630 Part-14/ISO 10545-5
Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
Chemical Resistant (Glazed Tiles)				
Stain Resistant	Min Class 3	Not Available	Min Class 2	IS 13630 Part 8 &ISO 10545-14
Resistant to household chemicals	Minimum B	Test Method Available	Min Class AA	IS 13630 Part 8/ ISO 10545-13
Resistant to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Declared Value^f	Test Method Available	A	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE

TILE VISUALISER

SOMANY

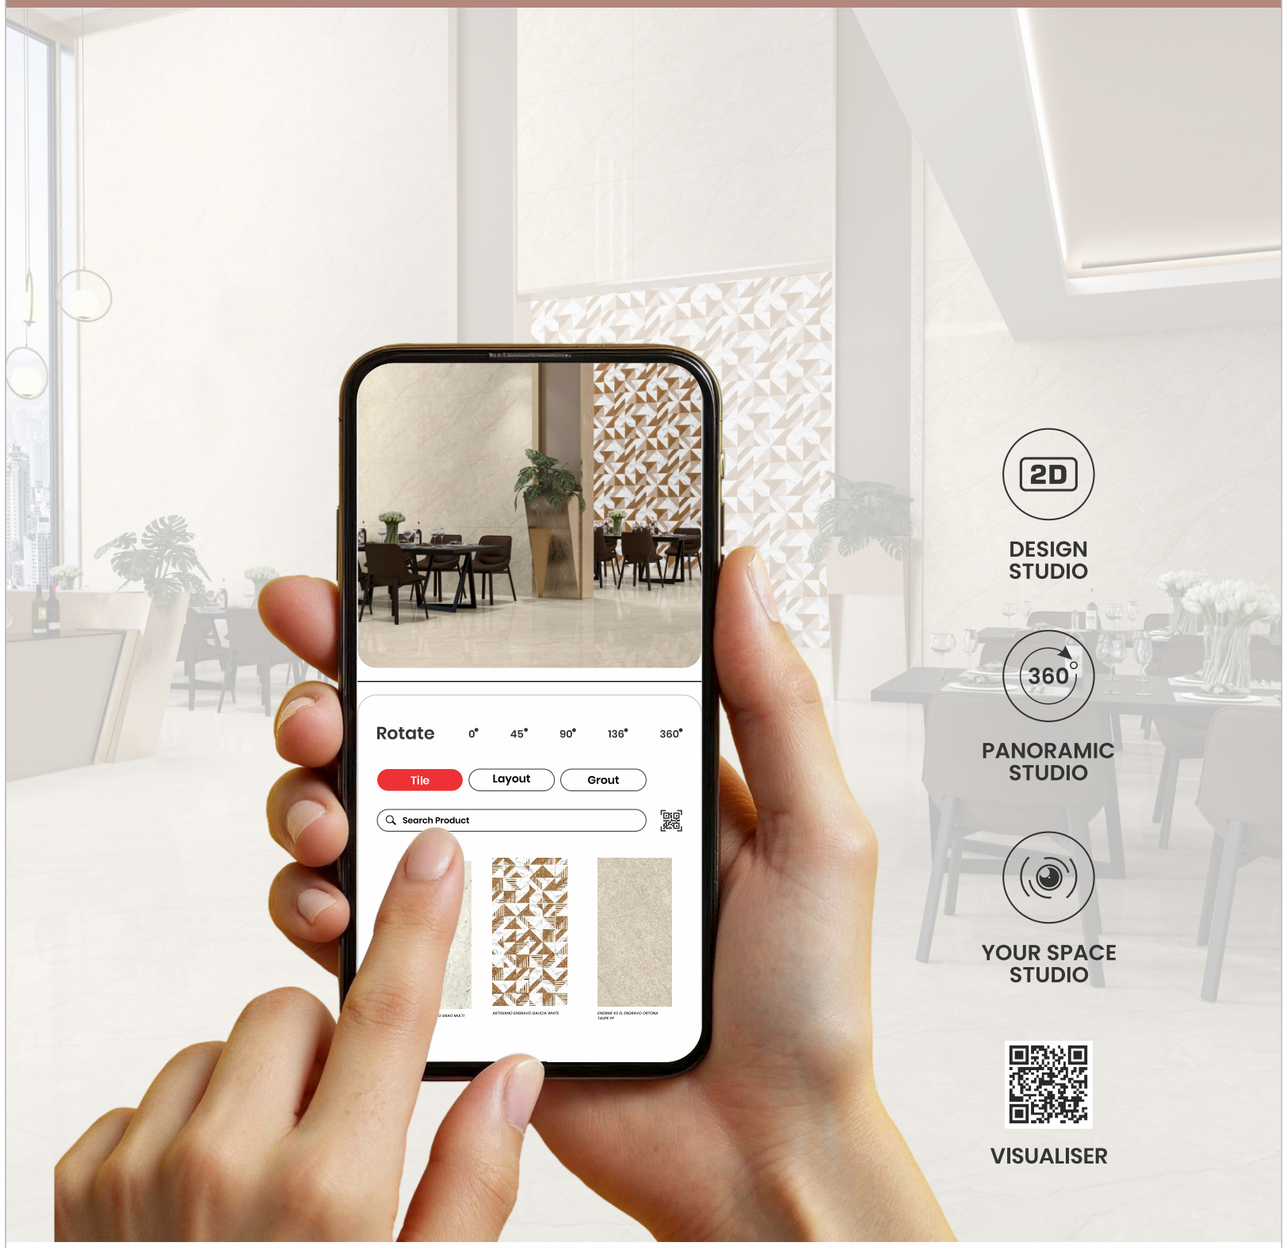

Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at **www.somanyceramics.com** or call on **Toll Free: 1800 103 0004**

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome

Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com