# DURASTONE

## PAVEZZA
collection

400 x 400mm

NEW ARRIVAL
—
SEPT 2025

UNIT 03

SOMANY



**NEW ARRIVAL** VOL 1 | SEPT 2025

UNIT 03

SOMANY


**Somany Ceramics Limited**
**Corporate Office:** F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
**Ahmedabad Office:** 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
**Registered Office:** 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
**www.somanyceramics.com | E-mail: customer.care@somanyceramics.com**

**Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)**

## PAVEZZA COLLECTION

Durastone by Somany introduces the Pavezza Collection—where stone's ancient wisdom meets contemporary innovation, and every tile embodies stone's perpetual elegance, sculpting spaces into artistic statements. Available in a 400×400mm format with a 11.5mm thickness and a refined matt finish, each piece captures the authentic texture of natural stone through rich earthy tones and nuanced patterns. Engineered to meet the demands of high-traffic zones and withstand harsh weather conditions, this collection blends resilience with refinement. From tranquil courtyards to graceful arbors, inviting porches to charming trellises to sun-kissed patios, these tiles boast remarkable chromatic properties that remain unfazed by UV exposure. Pavezza's pristine beauty stands the test of time—create outdoor spaces as enduring as your memories.



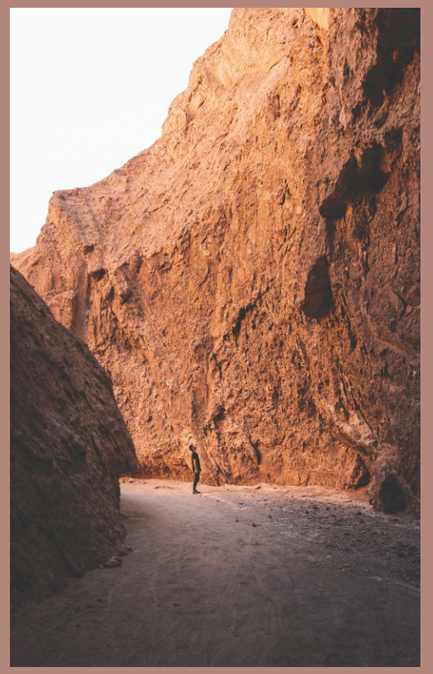

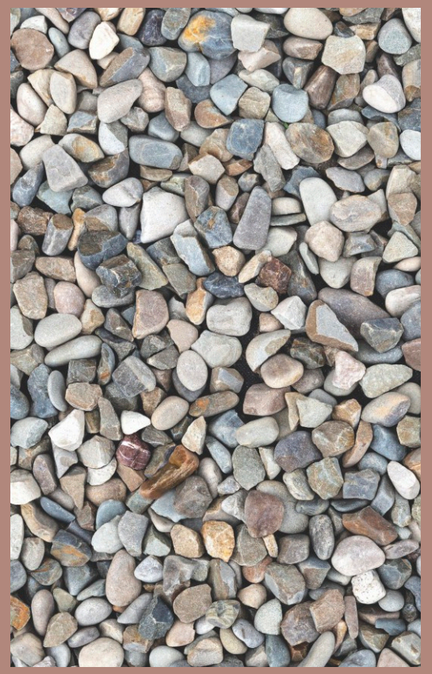

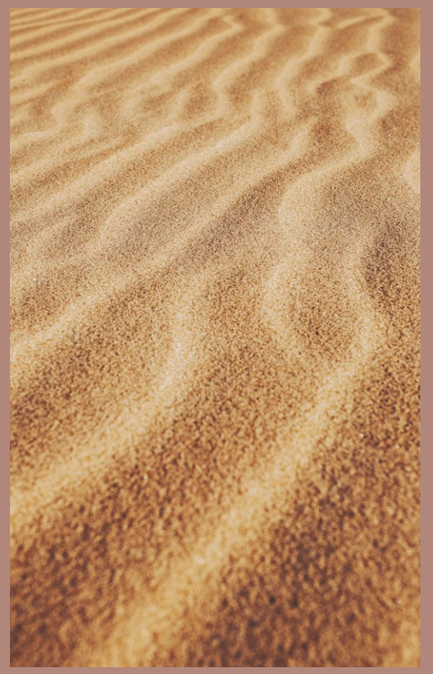

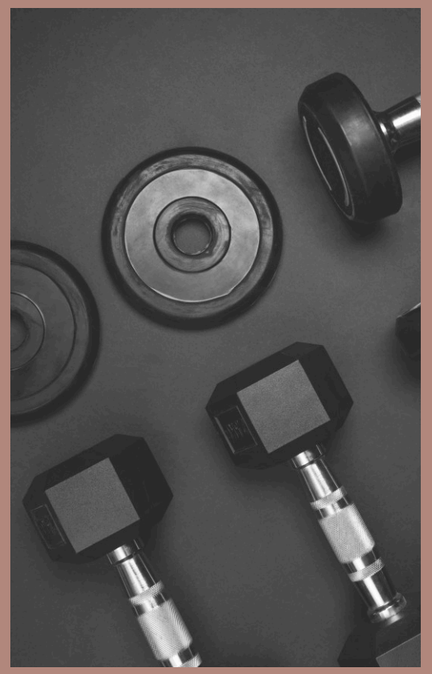

## TECHNICAL FEATURES

- ANTI SKID
- EASY TO CLEAN & MAINTAIN
- CHROMATIC PROPERTIES
- CHEMICAL RESISTANT
- FROST RESISTANT
- HIGH FLEXURAL STRENGTH
- WEAR RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- INDOOR & OUTDOOR
- ECO FRIENDLY & RECYCLABLE

## APPLICATION AREAS

- RESIDENTIAL AREAS
- COMMERCIAL AREAS
- HOSPITALS
- SHOPS AND MALLS
- HOTELS AND RESTAURANTS
- SCHOOLS AND COLLEGES
- OUTDOOR FURNITURE
- PUBLIC PLACES
- INDUSTRIAL AREAS
- PHARMACEUTICALS AREAS
- DIAGNOSTICS & CHEMICAL LABS



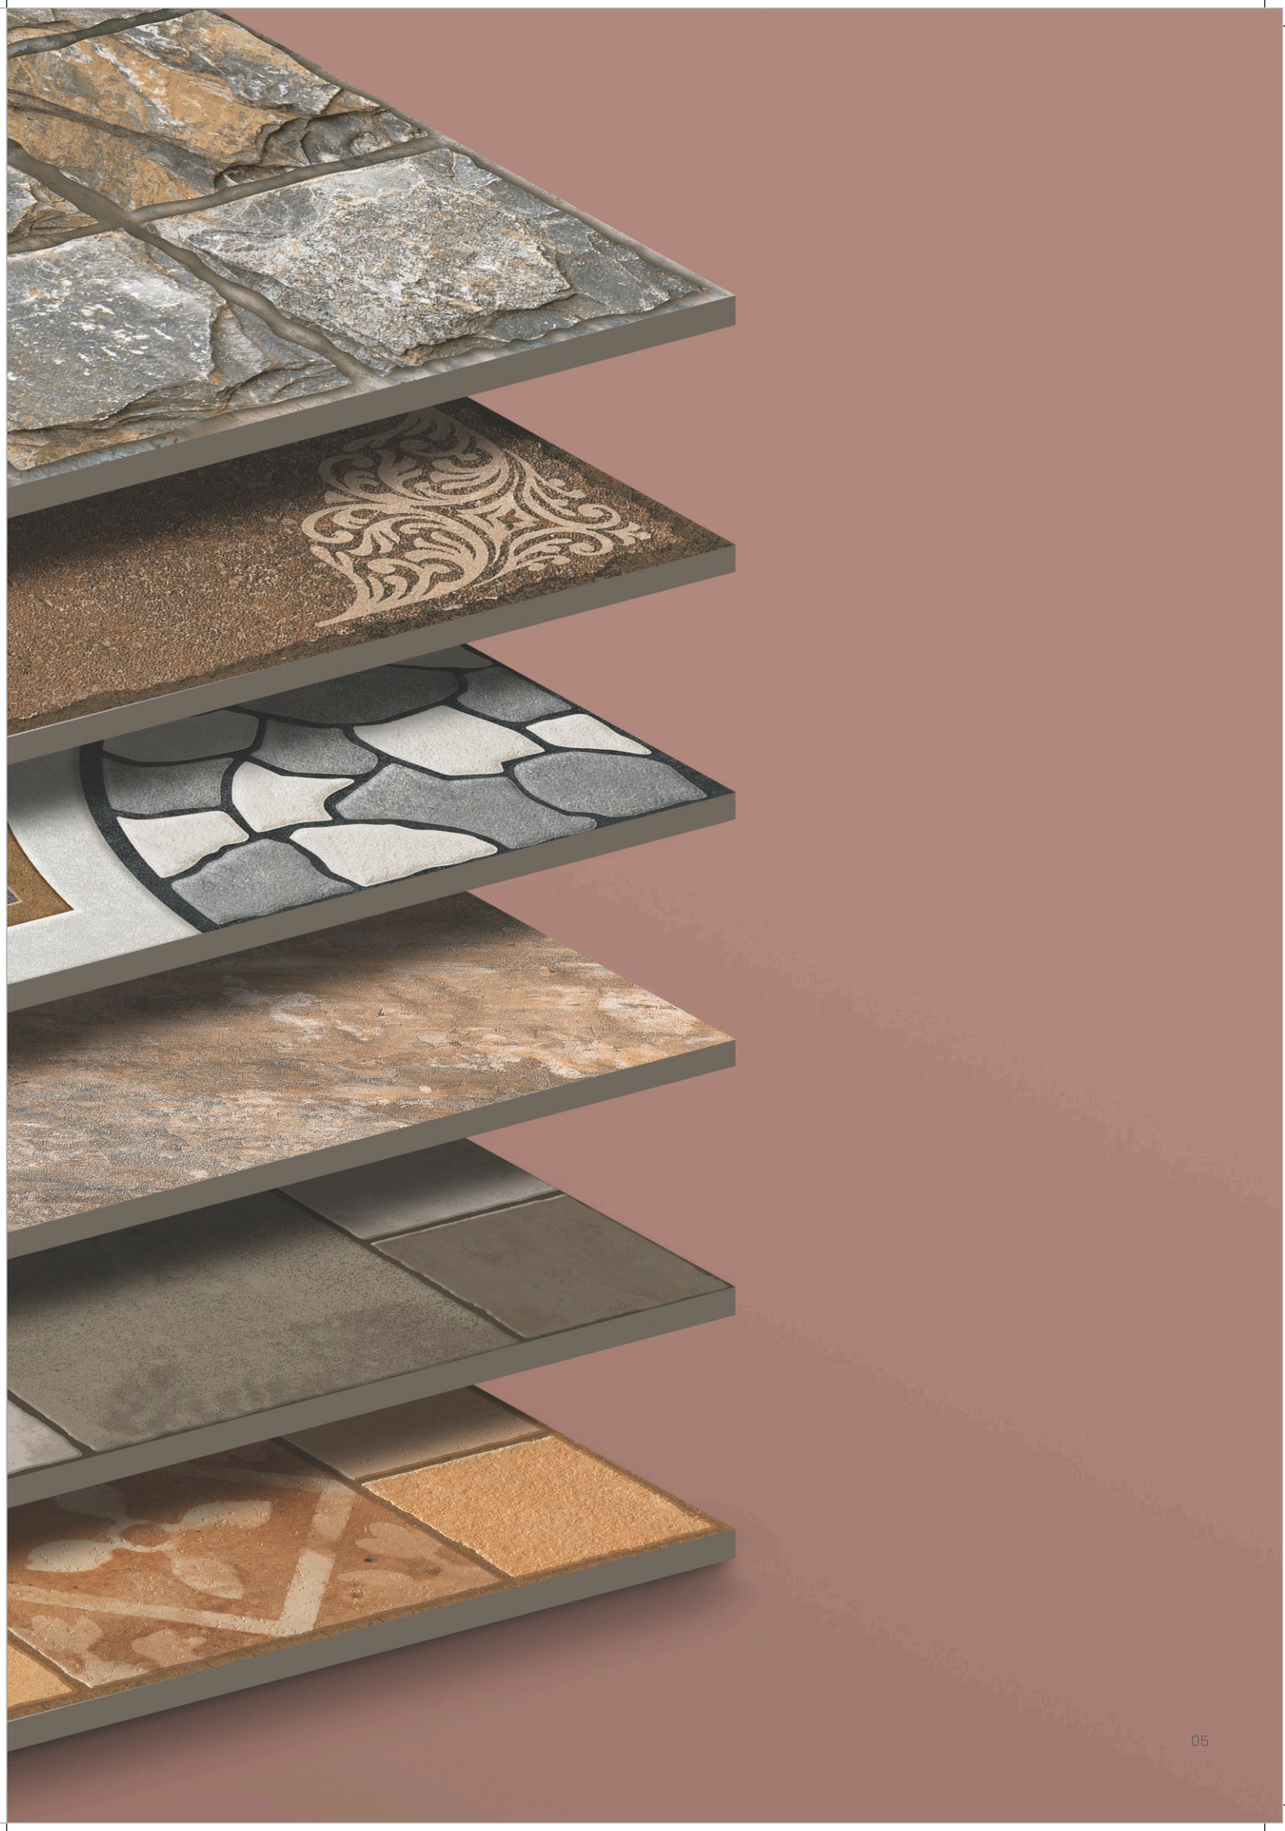



## DURASTONE

Reimagine your outdoor spaces with 400×400mm vitrified tiles in a 11.5mm thickness, echoing stone's timeless character with contemporary strength. Designed to endure heavy foot traffic and harsh weather, they preserve their natural textures and earthy elegance through years of use. Perfect for patios, courtyards, porches, trellises, and arbors, these tiles offer a perfect harmony of durability and elegance for every outdoor setting.

SUITABLE FOR OUTDOOR AREAS

SUITABLE FOR HIGH TRAFFIC AREAS

STRONG & DURABLE

**400x 400mm**

Thickness **11.5mm**

FLOOR: **CINZIA BROWN DECOR & CINZIA BROWN**
SIZE: 400X400mm

**HEAVY DUTY**
VITRIFIED TILES







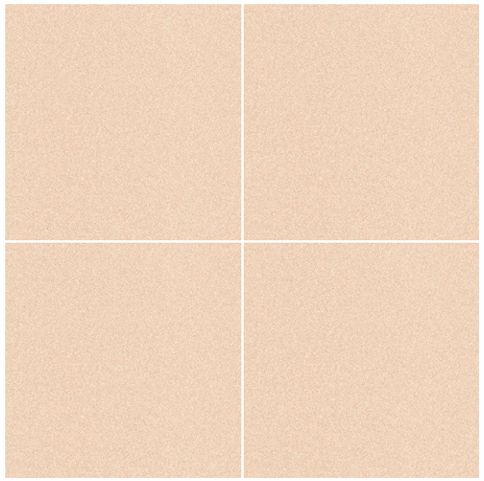

AINE BEIGE

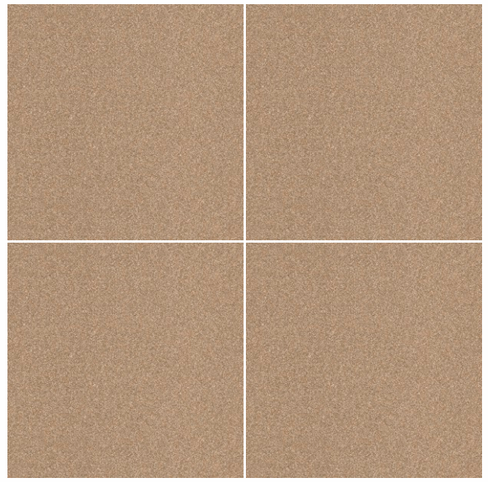

AINE BROWN

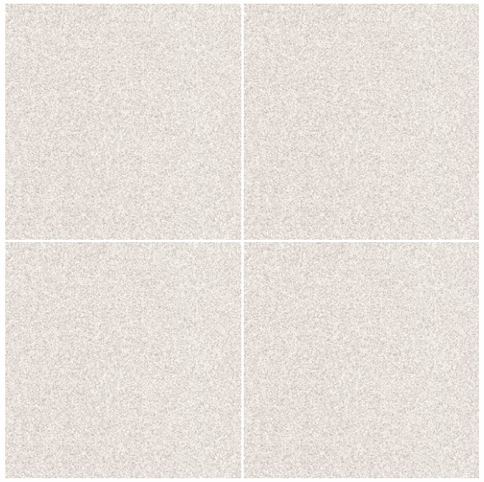

AINE BIANCO

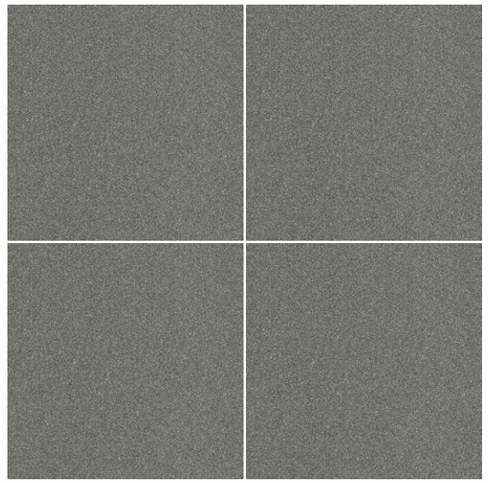

AINE NERO

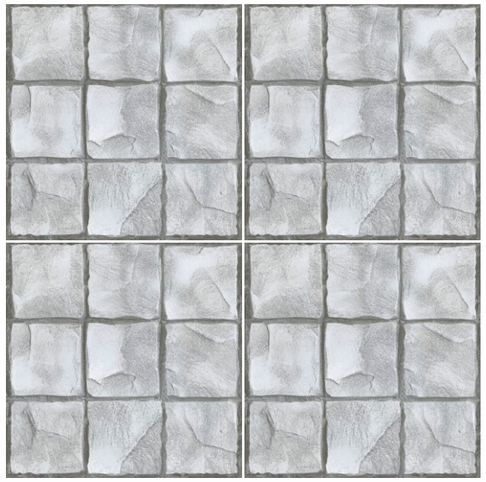

ALTA GREY



ALTA NATURAL

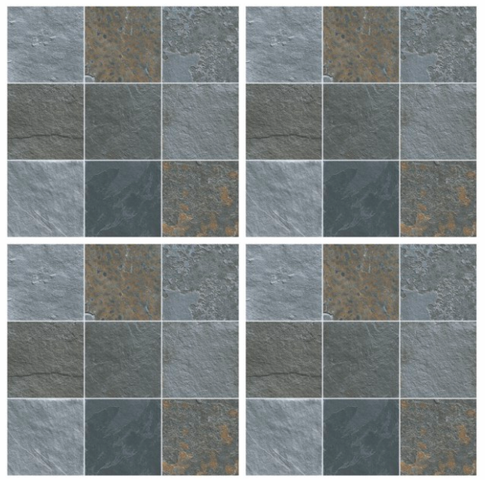

CORIN RUST



AJAX GREY



AJAX GREY DECOR

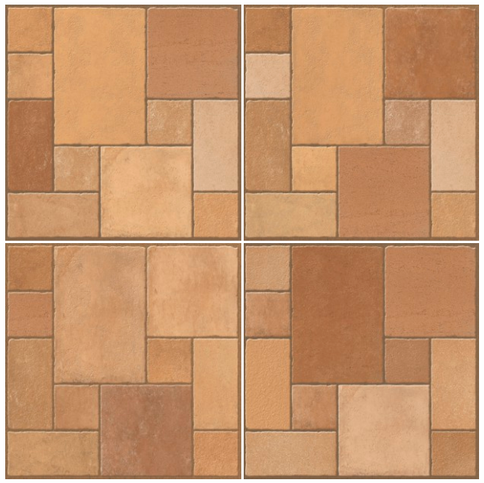

CINZIA BROWN



CINZIA BROWN DECOR





LUCIA COFFEE



LUCIA COFFEE DECOR

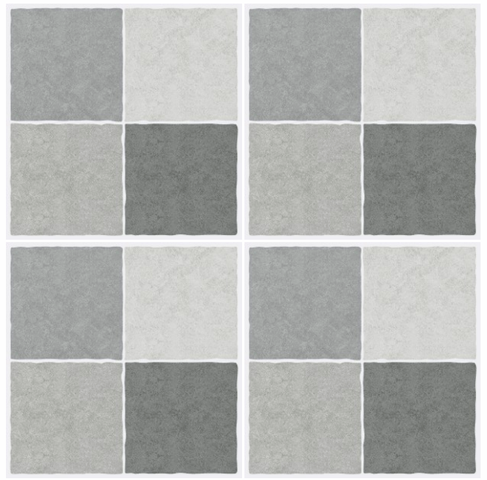

BICE GREY



BICE BROWN

FLOOR: **FRAZ GREY**
SIZE: 400X400mm

**HEAVY DUTY**
VITRIFIED TILES







CARITA GREY



CARITA BROWN



CARITA MULTY

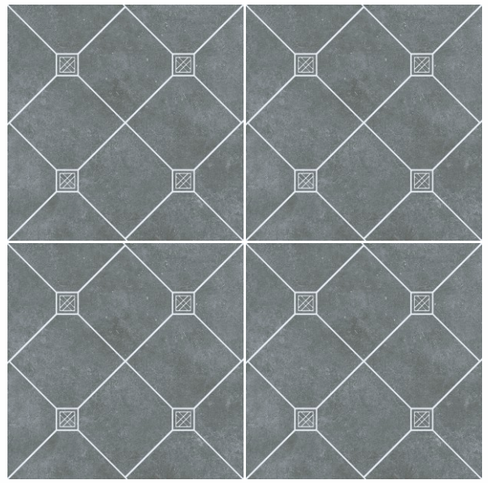

FRAZ GREY



CLIO GREY



CLIO BROWN

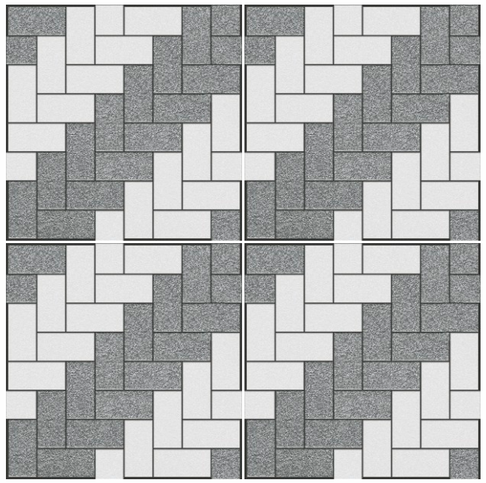

OGMA GREY

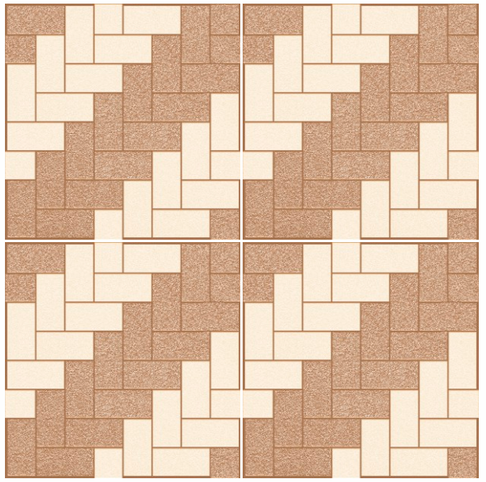

OGMA BROWN

ENTIS LIGHT



ENTIS DARK



PAX BEIGE

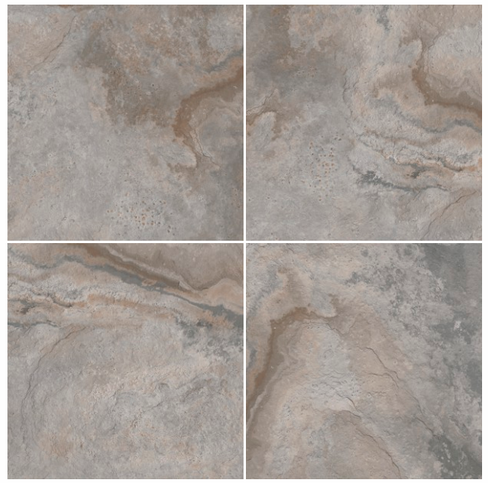

ERATO GREY



FLOOR: **ENTIS DARK** 400X400MM | HEAVY DUTY VITRIFIED TILES



ENID NERO



ENID NERO DECOR



FERRIS BEIGE



FERRIS BROWN



ENID COFFEE

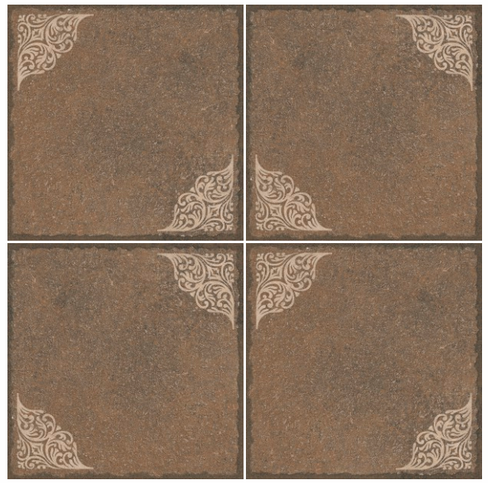

ENID COFFEE DECOR

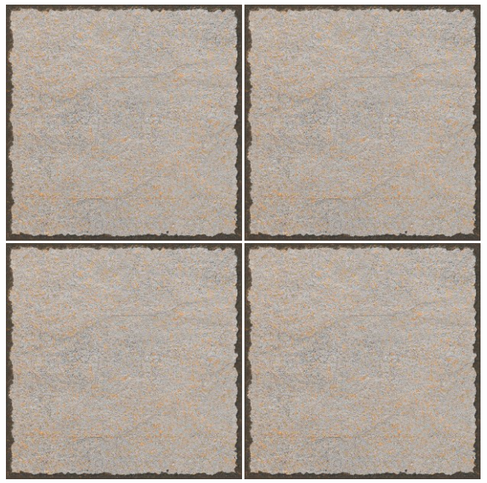

MATZA NATURAL



MATZA CHOCO

## DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.

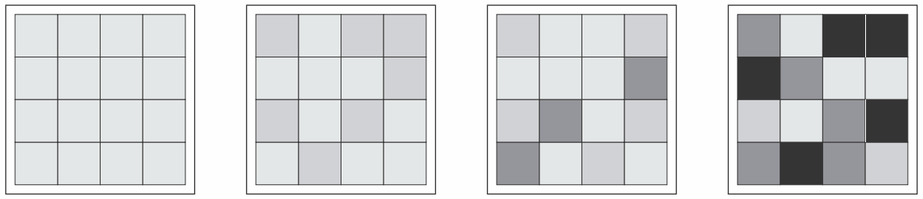

**V1** Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation V3 Moderate Variation V4 Substantial Variation





## TECHNICAL SPECIFICATION

| PACKAGING DETAIL FOR PAVEZZA COLLECTION | | | | |
|---|---|---|---|---|
| **Nominal Size** | **Thickness** | **Avg. Wt. Per Box (Kg.)** | **No. of Tiles Per Box** | **Coverage Area Per Box** |
| 400x400mm (PAVEZZA) | 11.5mm | 19.5 kg | 5 | 0.80 sq meter / 8.61sq feet |

| TECHNICAL SPECIFICATION FOR PAVEZZA COLLECTION | | | | |
|---|---|---|---|---|
| **Characteristics** | **Requirement as per ISO 13006:2018 ≤ 0.5% Group B I a** | **Requirement as per IS 15622:2017 0.08≤E≤3.0 Group BIb** | **Our value** | **Test Method** |
| Dimension & Surface Quality | | | | |
| Length & Width | ± 0.3% | ± 0.1% | ± 0.10% | IS 13630 Part 1/ ISO 10545-2 |
| Thickness | ± 5.0% | ± 5.0% | ± 4.0% | |
| Straightness of Side | ± 0.30% | ± 0.1% | ± 0.10% | |
| Rectangularity | ± 0.30% | ± 0.1% | ± 0.10% | |
| Surface Flatness | | | | |
| Center curvature (%) ( max.Deviation) | ± 0.40% | ± 0.5% | ± 0.2% | |
| Edge curvature (%) ( max.Deviation) | ± 0.40% | ± 0.5% | ± 0.2% | |
| Corner warpage (%)( max.Deviation) | ± 0.40% | ± 0.5% | ± 0.2% | |
| Surface Quality | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | |
| Physical Properties | | | | |
| Water Absorption | Avg. 0.5 %, Individual 0.6% max | Avg. 0.08 ≤ E ≤ 3 % | Avg. < 3.0 % | IS 13630 Part 2/ ISO 10545-3 |
| Modulus of Rupture [N/mm$^2$] | Avg. 35, Individual 32 min | Avg. 30, Individual 27 min | Avg.> 35 | IS 13630 Part 6/ISO 10545-4 |
| Breaking Strength in N | Min 1300 N | Min 1100 N | Min 1300 N | |
| Moisture Expansion in mm/m | Test Method Available | 0.02 Max | Max, 0.02 | IS 13630 Part 3/ISO-10545-10 |
| Scratch Hardness of surface (Mohs) | N/A | Min. 5 | Min. 6 | IS 13630 Part 13 |
| Surface Abrasion Resistant | Min Class II | Min II | Gr IV | IS 13630 Part 11/ISO 10545-Part 7 |
| Coefficient of linear thermal expansion from ambient temperature to 100$^o$ C | Test Method Available | Max 7 X 10 $^{-6}$ K$^{-1}$ max | Max 6 X 10 $^{-6}$ K$^{-1}$ max | IS 13630 Part 4/ ISO 10545-8 |
| Thermal Shock Resistant | Required | Min 10 cycle passed | 10 cycle passed | IS 13630 Part 5/ISO-10545-9 |
| Crazing Resistant | N/A | Min 4 cycles @ 7.5bar min | 4 cycle passed | IS 13630 Part 9/ISO 10545-11 |
| Impact Resistant as Co-efficient of Restitution (COR) | Test Method Available | Min 0.55 | Min 0.55 | IS 13630 Part-5/ISO 10545-14 |
| Frost Resistant | Required | Required | 100 Cycle Passed | IS 13630 Part 10/ISO 10545-12 |
| Chemical Resistant (Glazed Tiles) | | | | |
| Stain Resistant | Min Class 3 | Min Class 1 | Min Class 2 | IS 13630 Part 8 / ISO 10545-14 |
| Resistant to household chemicals | Minimum B | Test Method Available | Min Class AA | IS 13630 Part 8 / ISO 10545-14 |
| Resistant to acids and alkalis (with exception of hydrofluoric acid and its compounds) | Declared Value$^f$ | Test Method Available | Min Class A | |

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE



# TILE VISUALISER

SOMANY

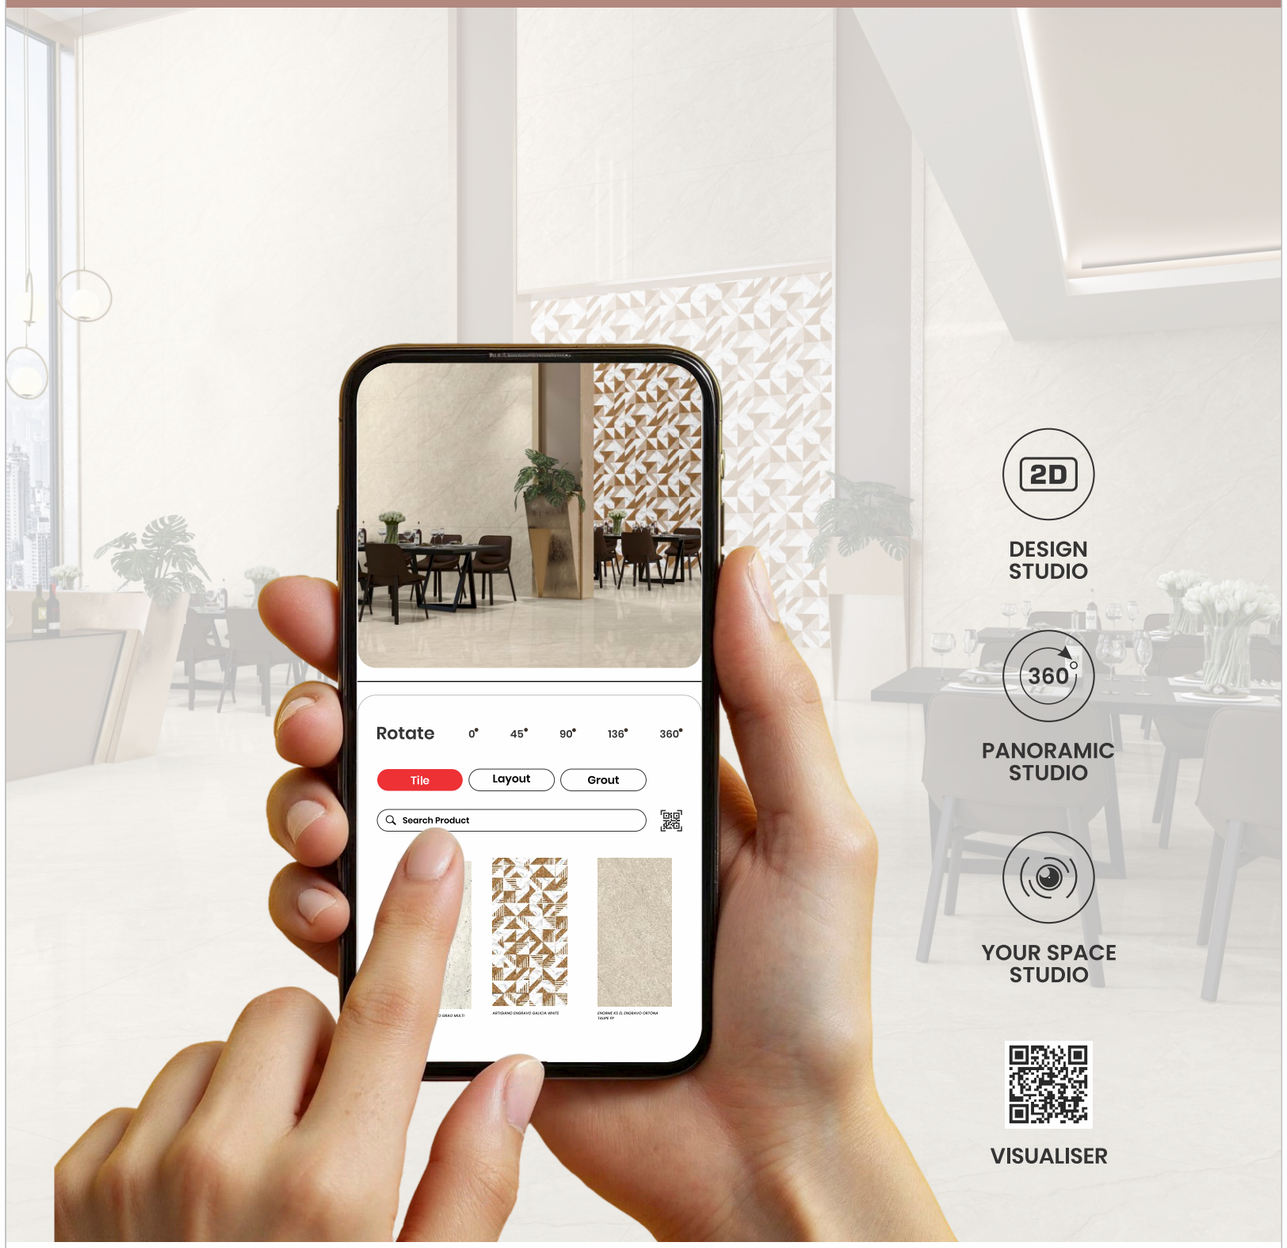


**Choosing the perfect tile for your dream home should be exciting, not overwhelming!** With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

**Your dream tile? Just a click away.**

Toll Free: 1800-103-0004 | www.somanyceramics.com

# SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner




## Lasting Bonds Made Ezy

**Behind Every Stunning Tile, there's a Stronger Bond!**
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at **www.somanyceramics.com** or call on **Toll Free: 1800 103 0004**

# SOMANY Bathware

# SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome

Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com