SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

ELARA
collection

1200 x 1800mm

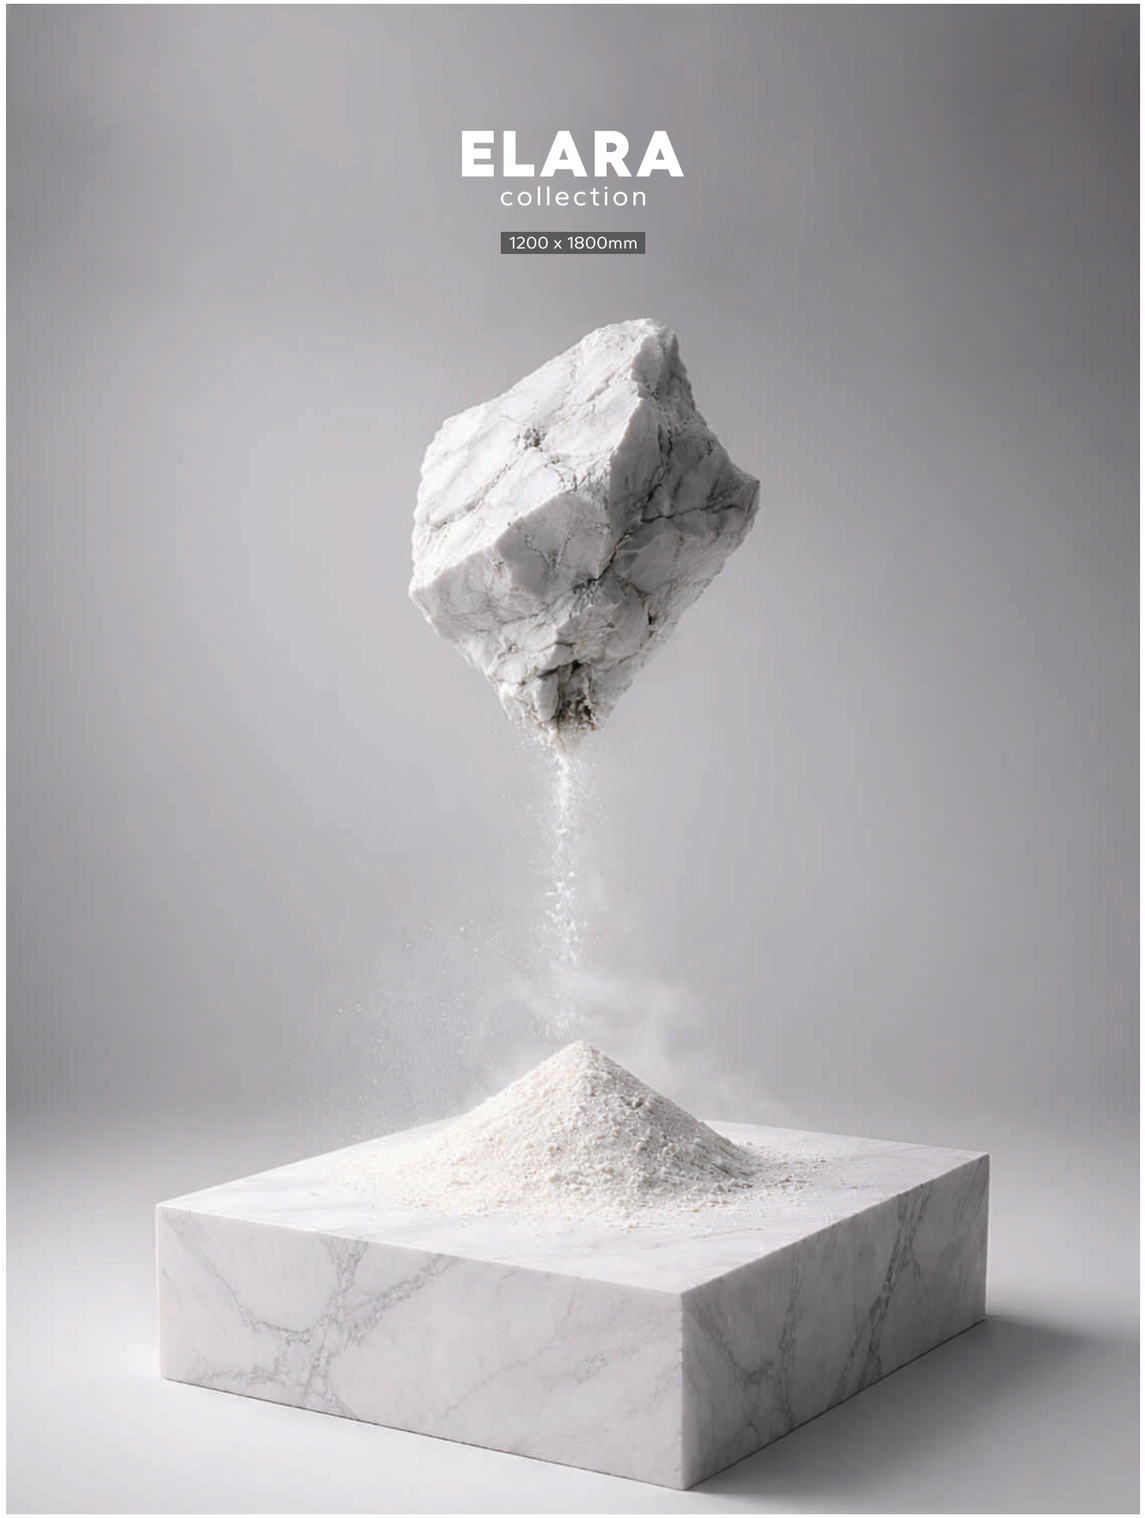

SOMANY

SOMANY

ELARA
collection

Across centuries and civilizations, marble has stood as an eternal symbol of sophistication, opulence, and transcendent beauty. The Elara collection is born from this ancient embrace, its silhouette having moved through history's most celebrated interiors into the boldest spaces of today, never fading, never faltering.

Offered in 1200x1800mm, the ultimate expression of architectural elegance, Elara enhances every surface it inhabits, accentuating finish and pattern with quiet authority. Its Full Polished finish draws light deep into the surface, releasing it with a luminous, mirror-like brilliance that lends every interior a quiet, enduring radiance.

From living rooms and bedrooms to hotel lobbies, shopping malls, and showrooms, and across the demanding expanse of office floors, conference rooms, hospitals, and feature walls, with Elara, spaces are not merely finished. They are defined.





TECHNICAL FEATURES



HIGH GLOSS SURFACE

Our strong High-gloss finish that elevates any space. The reflective surface amplifies light, creating a brighter and more luxurious ambience with Gloss Unit(GU): 95-100.



ABRASION RESISTANT FOR MODERATE TO HIGH TRAFFIC AREAS

Our tiles are designed to withstand the test of time, even in high-traffic areas. Their superior abrasion resistance of PEI-III ensures durability and maintains their pristine appearance for years.



EASY TO CLEAN

They are easy to clean and maintain, thanks to their non-porous surface that resists dirt and stains.



WATER REPELLENT



BLENDED SMOOTHNESS



NON-REFLECTIVE



THERMAL RESISTANT



CHEMICAL RESISTANT



TEMPERATURE RESISTANT



HYGIENIC SURFACE



FROST RESISTANT



LOAD & STRESS RESISTANT



ABRASION & WEAR RESISTANT

APPLICATION AREAS



RESIDENTIAL AREAS



COMMERCIAL AREAS



HOSPITALS



SHOPS AND MALLS



HOTELS AND RESTAURANTS



SCHOOLS AND COLLEGES



OUTDOOR FURNITURE



PUBLIC PLACES



INDEX

1200x1800mm


ELARA 1801 EL 12


ELARA 1802 EL 12

ELARA 1803 EL 18


ELARA 1804 EL 18

ELARA 1805 EL 24

ELARA 1806 EL 24


ELARA 1807 EL 30


ELARA 1808 EL 30

ELARA 1809 EL 36


ELARA 1810 EL 36


ELARA 1811 EL 42


ELARA 1812 EL 42


ELARA 1813 EL 48


ELARA 1814 EL 48


ELARA 1815 EL 54


ELARA 1816 EL 54


ELARA 1817 EL 60


ELARA 1818 EL 60


ELARA 1819 EL 66

ELARA 1820 EL 66



WALL & FLOOR:
ELARA 1801 EL

SIZE:
1200x1800mm

THICKNESS:
9mm



WALL & FLOOR:

ELARA 1801 EL

SIZE:

1200x1800mm

THICKNESS:

9mm







ELARA 1801 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm





ELARA 1802 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm



WALL & FLOOR:
ELARA 1804 EL

SIZE:
1200x1800mm

THICKNESS:
9mm



WALL & FLOOR:

ELARA 1804 EL

SIZE:

1200x1800mm

THICKNESS:

9mm

ELARA 1803 EL

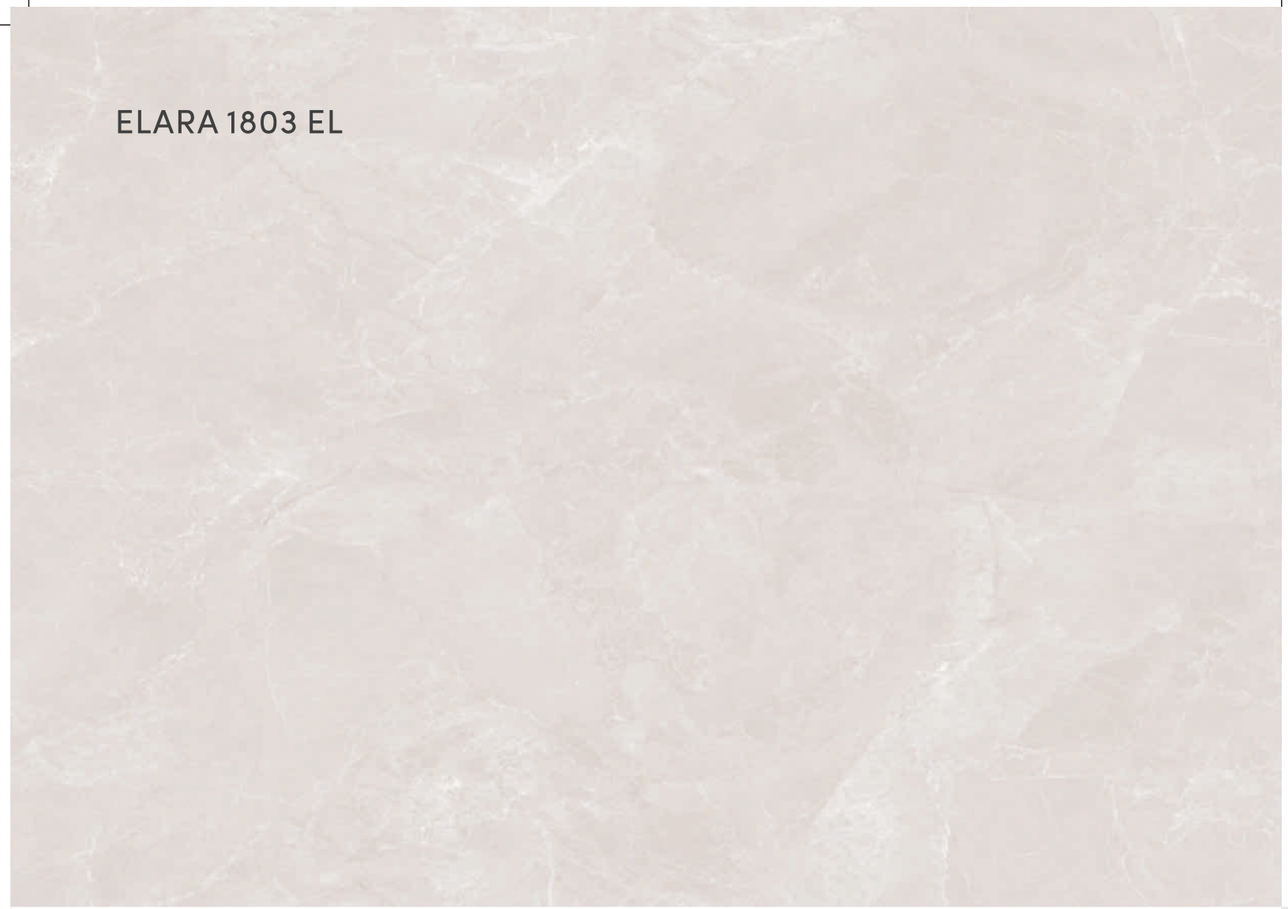

ELARA 1803 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm

ELARA 1804 EL





ELARA 1804 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm



WALL & FLOOR:
ELARA 1805 EL

SIZE:
1200x1800mm

THICKNESS:
9mm



WALL & FLOOR:

ELARA 1805 EL

SIZE:

1200x1800mm

THICKNESS:

9mm



ELARA 1805 EL

ELARA 1805 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm

ELARA 1806 EL

ELARA 1806 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm



WALL & FLOOR:
ELARA 1807 EL

SIZE:
1200x1800mm

THICKNESS:
9mm



WALL & FLOOR:

ELARA 1807 EL

SIZE:

1200x1800mm

THICKNESS:

9mm







ELARA 1807 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm





ELARA 1808 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm



WALL & FLOOR:
ELARA 1809 EL

SIZE:
1200x1800mm

THICKNESS:
9mm



WALL & FLOOR:

ELARA 1809 EL

SIZE:

1200x1800mm

THICKNESS:

9mm



ELARA 1809 EL

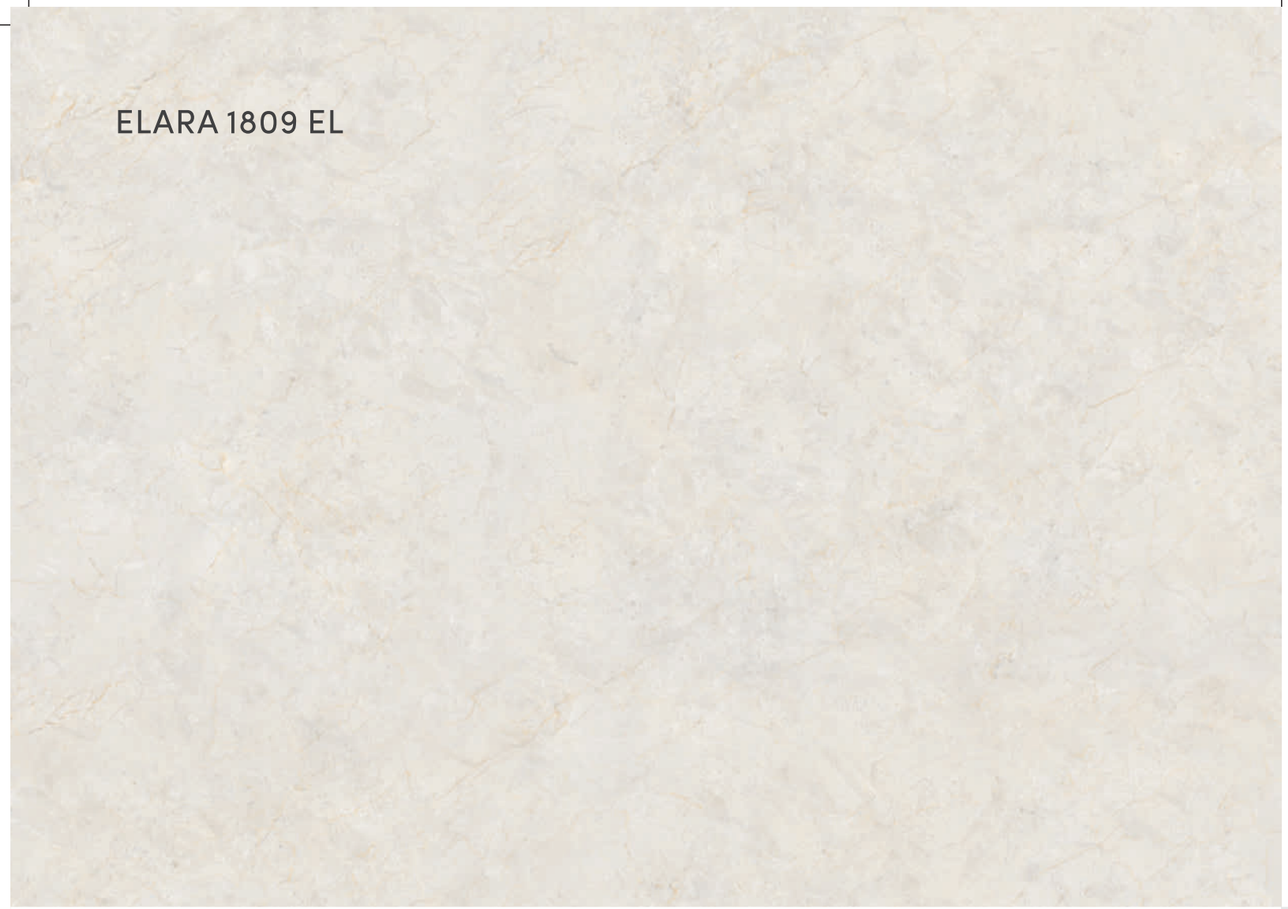

ELARA 1809 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm

ELARA 1810 EL

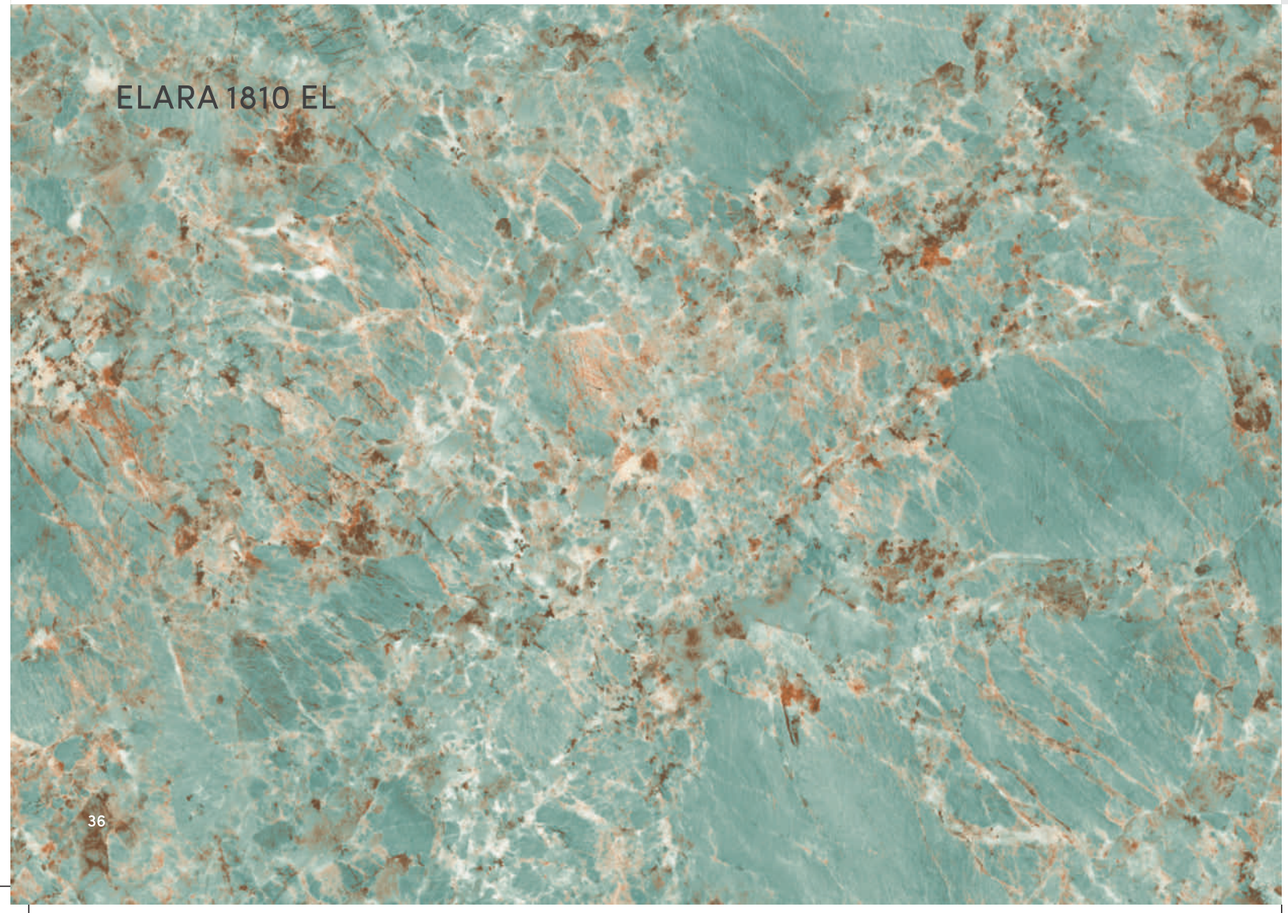

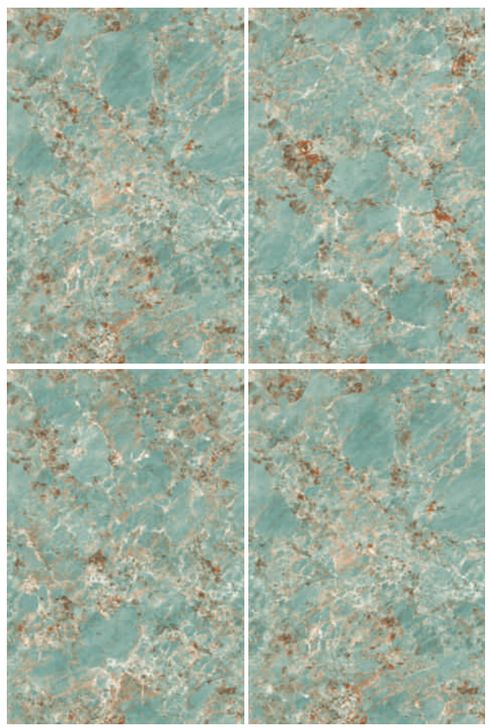

ELARA 1810 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm



WALL & FLOOR:
ELARA 18011 EL
ELARA 18012 EL

SIZE:
1200x1800mm

THICKNESS:
9mm



WALL & FLOOR:

ELARA 1811 EL
ELARA 1812 EL

SIZE:

1200x1800mm

THICKNESS:

9mm







ELARA 1811 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm



ELARA 1812 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm

WALL & FLOOR:
ELARA 1813 EL

SIZE:
1200x1800mm

THICKNESS:
9mm



WALL & FLOOR:

ELARA 1813 EL

SIZE:

1200x1800mm

THICKNESS:

9mm



ELARA 1813 EL



ELARA 1813 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm

ELARA 1814 EL



ELARA 1814 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm



WALL & FLOOR:
ELARA 1815 EL

SIZE:
1200x1800mm

THICKNESS:
9mm



WALL & FLOOR:

ELARA 1815 EL

SIZE:

1200x1800mm

THICKNESS:

9mm



ELARA 1815 EL



ELARA 1815 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm

ELARA 1816 EL



ELARA 1816 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm



WALL & FLOOR:
ELARA 1818 EL
ELARA 1817 EL

SIZE:
1200x1800mm

THICKNESS:
9mm



WALL & FLOOR:

ELARA 1818 EL
ELARA 1817 EL

SIZE:

1200x1800mm

THICKNESS:

9mm



ELARA 1817 EL



ELARA 1817 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm

ELARA 1818 EL

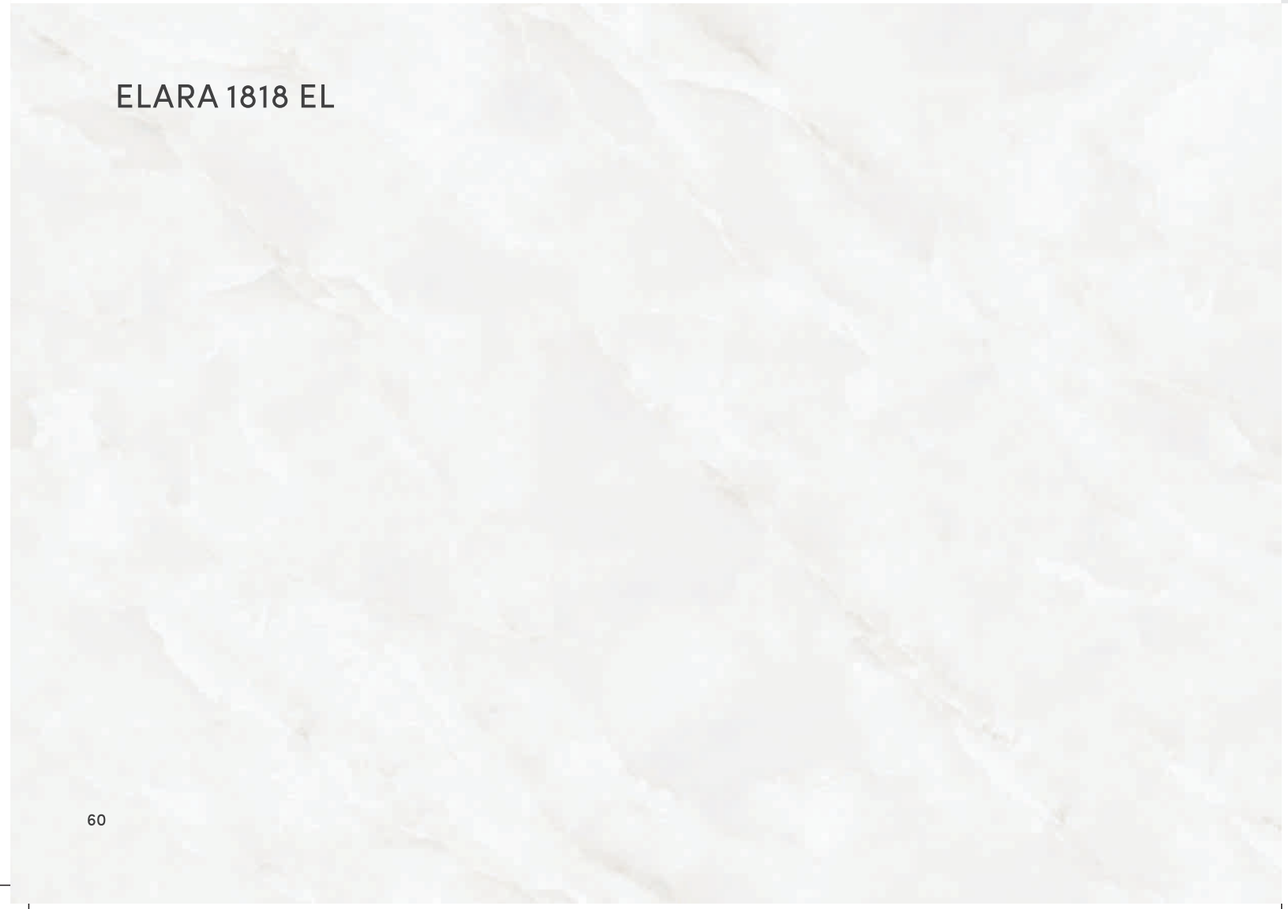



ELARA 1818 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm



WALL & FLOOR:
ELARA 1819 EL

SIZE:
1200x1800mm

THICKNESS:
9mm



WALL & FLOOR:

ELARA 1819 EL

SIZE:

1200x1800mm

THICKNESS:

9mm



ELARA 1819 EL





ELARA 1819 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm

ELARA 1820 EL

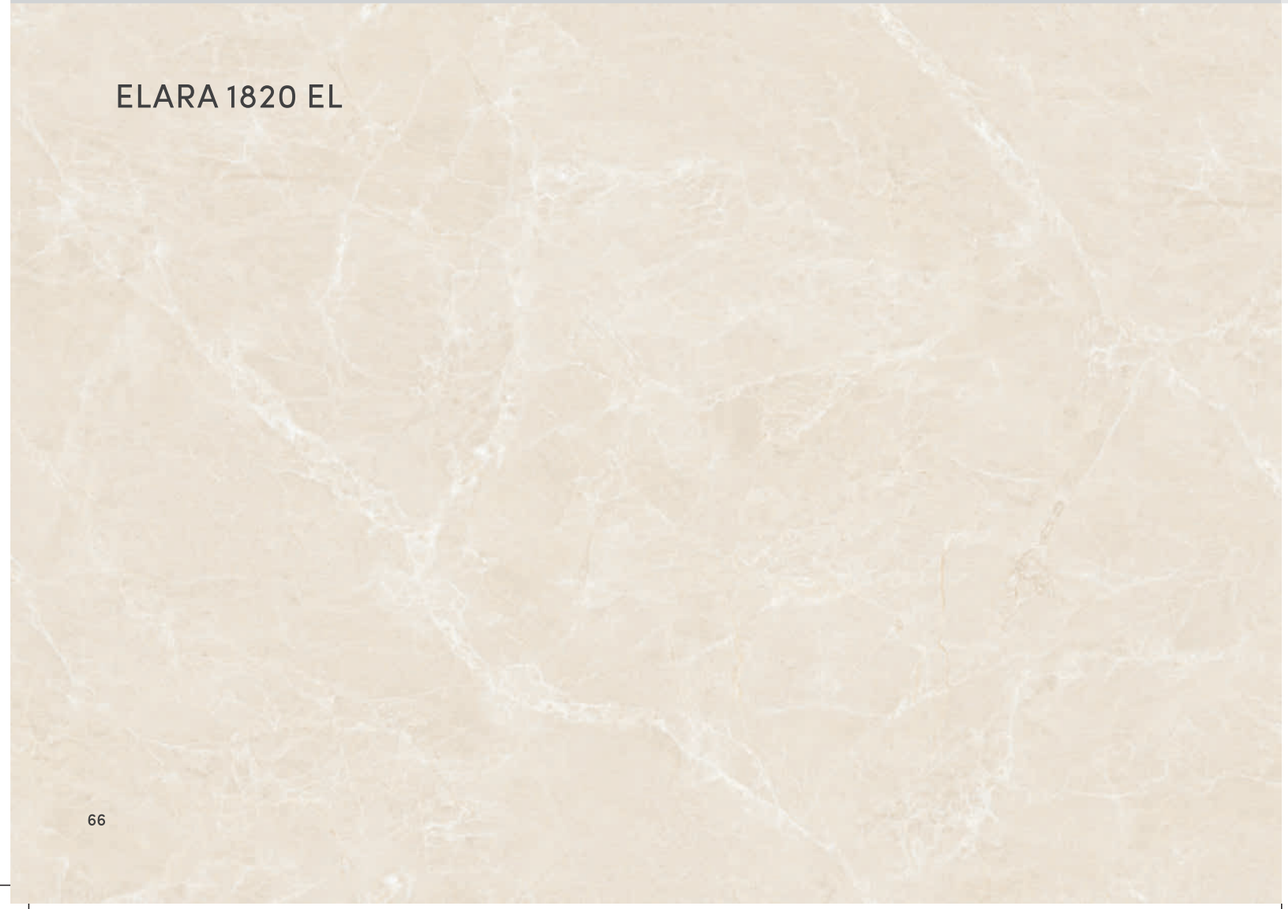

ELARA 1820 EL

SURFACE:

FULL POLISHED

SIZE:

1200x1800mm

THICKNESS:

9mm

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.



V1 Minimal Variation



V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation

V3 Moderate Variation V4 Substantial Variation

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR ELARA COLLECTION				
Nominal Size (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
1200x1800mm	9.0	87	2	4.32 Sq. Mtr. / 46.50 Sq. Ft.

TECHNICAL SPECIFICATION FOR ELARA COLLECTION				
Characteristics	Requirement as per IS 15622 : 2017 E ≤ 0.08 Group B I a	Requirement as per ISO 13006 : 2018 ≤ 0.5% Group B I a	Our Values	Test Method
A) Dimension & Surface Quality				
I) Length & Width	± 0.1%	± 0.3%	± 0.1%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	± 0.1%	± 0.3%	± 0.1%	
iv) Rectangularity	± 0.1%	± 0.3%	± 0.1%	
v) Surface Flatness				
a) Center Curvature (%) (Max. Deviation)	± 0.5%	± 0.4%	± 0.2%	
b) Edge Curvature (%) (Max. Deviation)	± 0.5%	± 0.4%	± 0.2%	
c) Corner Warpage (%) (Max. Deviation)	± 0.5%	± 0.4%	± 0.2%	
vi) Surface Quality	Min. 95% of surface will be free from visible defects	Min. 95% of surface will be free from visible defects	Min. 95% of surface will be free from visible defects	
B) Physical Properties				
I) Water Absorption	Avg. ≤ 0.08% Individual Max. 0.1%	Avg. ≤ 0.05% Individual Max. 0.6%	Avg. ≤ 0.08%	IS 13630 Part 2/ISO 10545-3
ii) Modulus of Rupture [N/mm^2]	Avg. 35, Individual 32 Min.	Avg. 35, Individual 32 Min.	Avg. > 35	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1300 N	Min 1300 N	Min 1800 N	
iv) Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO 10545-10
v) Scratch Hardness of Surface (Mohs)	Min 5	N/A	Min.3	IS 13630 Part 13
vi) Resistant to Abrasion of Glazed Tiles (Class I to V)	Min II	Abrasion Class & Cycle Passed	Class 3	IS 13630 Part 11/ISO 10545-7
vii) Coefficient of Linear Thermal Expansion From Ambient Temperature to 100^{0} C	Max 6 X 10^{-6} K^{-1} Max	Test Method Available	Max 6 X 10^{-6} K^{-6} Max	IS 13630 Part 4/ISO 10545-8
viii) Thermal Resistant	10 Cycle Min	Test Method Available	10 Cycle Passed	IS 13630 Part 5/ISO 10545-9
ix) Crazing Resistant	4 Cycle @ 7.5 bar Min	Required	4 Cycle Passed	IS 13630 Part 9/ISO 10545-11
x) Impact Resistant Coefficient of Restitution (COR)	0.55 Min	Test Method Available	Min 0.55	IS 13630 Part 14/ISO 10545-5
xi) Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistant (Glazed Tiles)				
I) Stain Resistant	Min Class 1	Min Class 3	Class 2 (For Polished)	IS 13630 Part 8/ISO 10545-14
ii) Resistant to Household Chemicals	Min Class AA	Min Class B	Min Class AA	IS 13630 Part 8/ISO 10545-13
iii) Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if Agreed	Declared Value	Min Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE

SOMANY

TILE VISUALISER

SOMANY

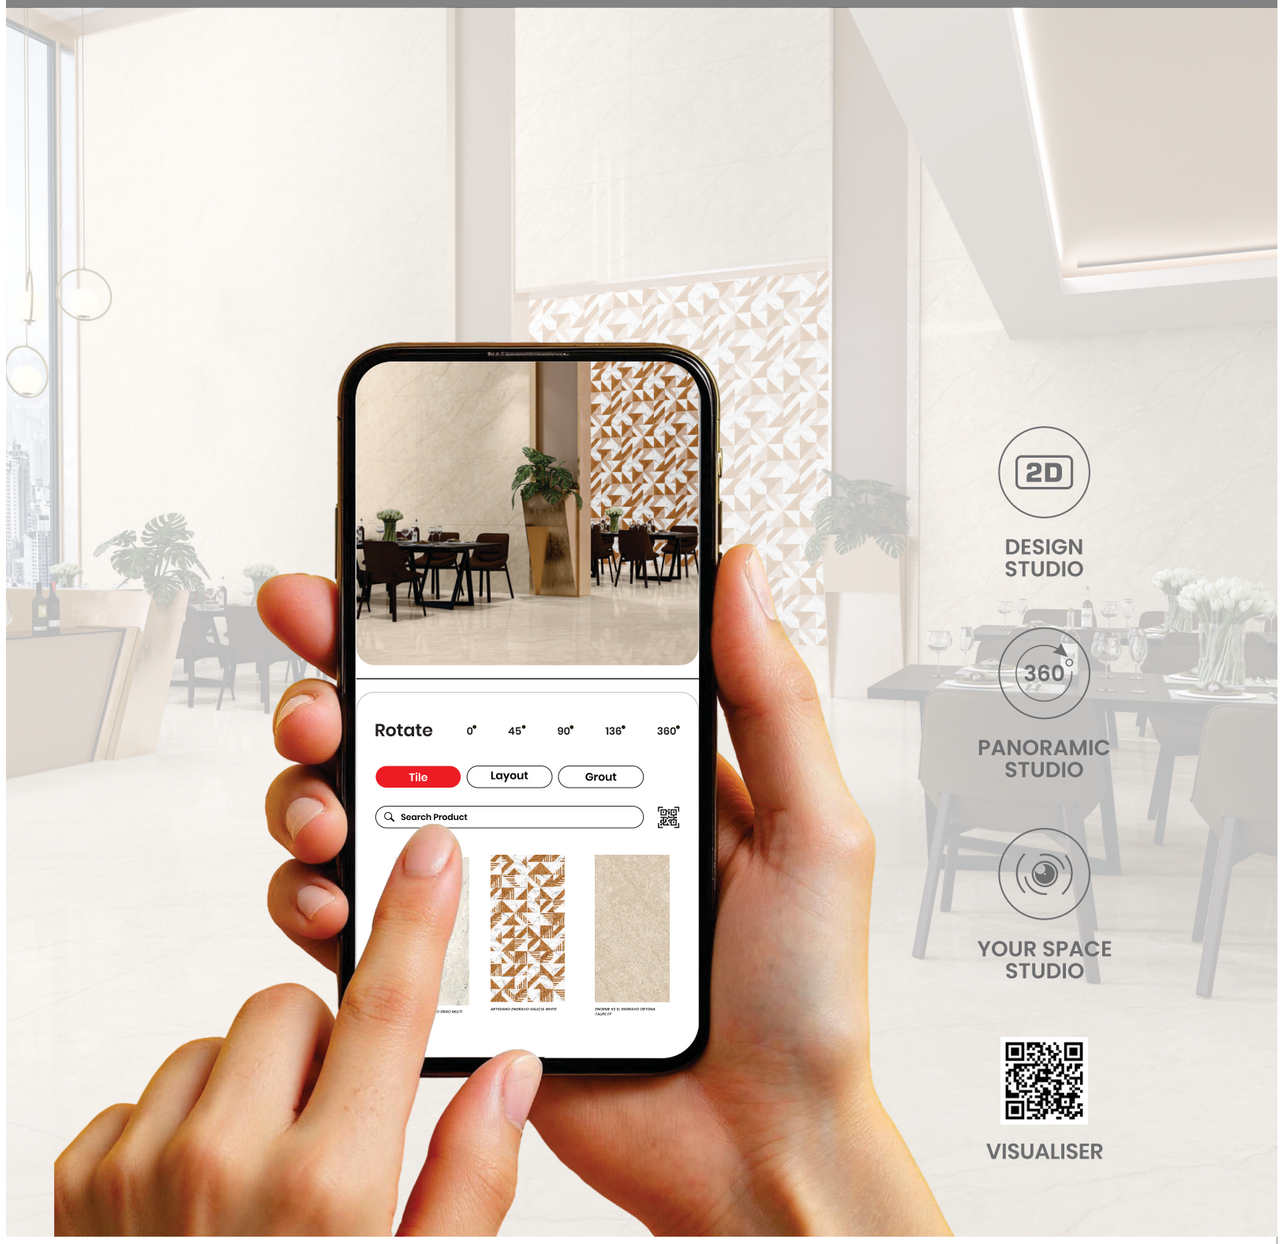

Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at **www.somanyceramics.com** or call on **Toll Free: 1800 103 0004**

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome

Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com