

DURAGRES

EVERSTONE

collection

800x1600mm

9mm thickness



SOMANY

SOMANY
TILES | BATHWARE

Somany Ceramics Limited

Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph.: 0120-4627900

Ahmedabad Office: 601 to 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad-382481; Ph.: 079-27661103 & 04

Registered Office: 2, Red Cross Place, Kolkata-700001; Ph.: 033-22487406/5913

www.somanyceramics.com | e-mail: customer.care@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00 am to 6:30 pm; Mon-Fri)

UNIT-1 / EVERSTONE / CAT / MARCH 2025



**GLOWING IN EARTHY HUE,
WHISPERING TALES OF
ROCK AND SAND**

EVERSTONE

collection

The power of stone, the grace of artistry

The Everstone Collection is a testament to the artistry of natural stone replication, meticulously crafted to evoke the raw, organic beauty of quarried rock. Its precision-engineered surface seamlessly blends the intricate textures and tonal variations of genuine stone, enriched by a delicately textured matte finish with a subtle sheen that enhances depth and dimension.

Developed for exceptional durability, Everstone is composed of high-density ceramic, ensuring superior resistance to scratches, stains, and moisture absorption. This makes it an ideal choice for high-traffic commercial and residential spaces, where longevity and aesthetic integrity are paramount.

Its low porosity and advanced surface treatment create a protective barrier against dirt accumulation, making it remarkably easy to clean and maintain. Additionally, its enhanced slip resistance makes it well-suited for outdoor installations, wet areas, and high-humidity environments, providing both safety and style.

1 Design 4 Shades 1 Punch

Size: 800x1600mm | Thickness: 9mm | Design: 1 | Shades: 4 | Punch: 1



ENORME KS EVERSTONE
AVARIO ROBUSTO PEDRO

ENORME KS EVERSTONE
BEIGE ROBUSTO PEDRO

ENORME KS EVERSTONE
CHIARO ROBUSTO PEDRO

ENORME KS EVERSTONE
SCURO ROBUSTO PEDRO



Actual Size Image

POWERED BY
Robusto
surface

Engineered to withstand temperature fluctuations, UV exposure, and heavy footfall, the Everstone Collection is a versatile solution for indoor flooring, outdoor patios, pool decks, and facades, delivering an enduring blend of natural allure and cutting-edge performance.

Size	Surface	Thickness	Random
800x1600mm - Punch (PEDRO)	Robusto	9	V3

TECHNICAL FEATURES



MOH'S SCALE HARDNESS >7

High density sintering for a robust surface which is a crucial factor to consider when choosing tiles, especially for high-traffic & high-stress areas.

ABRASION RESISTANCE PEI-V

Our tiles are designed to withstand the test of time, even in high-traffic areas. Their superior abrasion resistance ensures durability and maintains their pristine appearance for years.

SLIP RESISTANCE R 10

R 10 slip resistance tiles are a great choice for areas that may get wet. They offer a good balance of slip resistance and aesthetics, making them suitable for both residential and commercial settings.



WATER
REPELLENT



BLENDED
SMOOTHNESS



NON-
REFLECTIVE



EASY TO
CLEAN



ABRASION AND
WEAR-RESISTANT



HYGIENIC
AND SAFE



RESISTS THERMAL
SHOCKS



FROST-
PROOF



RESISTS LOAD
AND STRESS



RESISTS
CHEMICALS



RESISTS HIGH
TEMPERATURES

APPLICATION AREAS



RESIDENTIAL
AREAS



COMMERCIAL
AREAS



HOSPITALS



SHOPS
AND MALLS



HOTELS AND
RESTAURANTS



SCHOOLS
AND COLLEGES



OUTDOOR
FURNITURE



PUBLIC
PLACES

EVERSTONE
collection

ENORME KS
EVERSTONE
AVARIO ROBUSTO
PEDRO

ENORME KS
EVERSTONE
BEIGE ROBUSTO
PEDRO

ENORME KS
EVERSTONE
CHIARO ROBUSTO
PEDRO

ENORME KS
EVERSTONE
SCURO ROBUSTO
PEDRO



ENORME KS EVERSTONE AVARIO ROBUSTO PEDRO



V3



Actual Size Image



Size:
800x1600mm


Surface:
Robusto (Pedro Punch)



360 VIEW



WALL: ENORME KS EVERSTONE AVARIO ROBUSTO PEDRO | SIZE: 800X1600MM
SURFACE: ROBUSTO (Pedro Punch)



9mm Thickness


FLOOR: ENORME KS EVERSTONE AVARIO ROBUSTO PEDRO | SIZE: 800X1600MM | SURFACE: ROBUSTO (Pedro Punch)



WALL: ENORME KS EVERSTONE AVARIO ROBUSTO PEDRO | SIZE: 800X1600MM | SURFACE: ROBUSTO (Pedro Punch)



FLOOR: ENORME KS EVERSTONE AVARIO ROBUSTO PEDRO | SIZE: 800X1600MM | SURFACE: ROBUSTO (Pedro Punch)

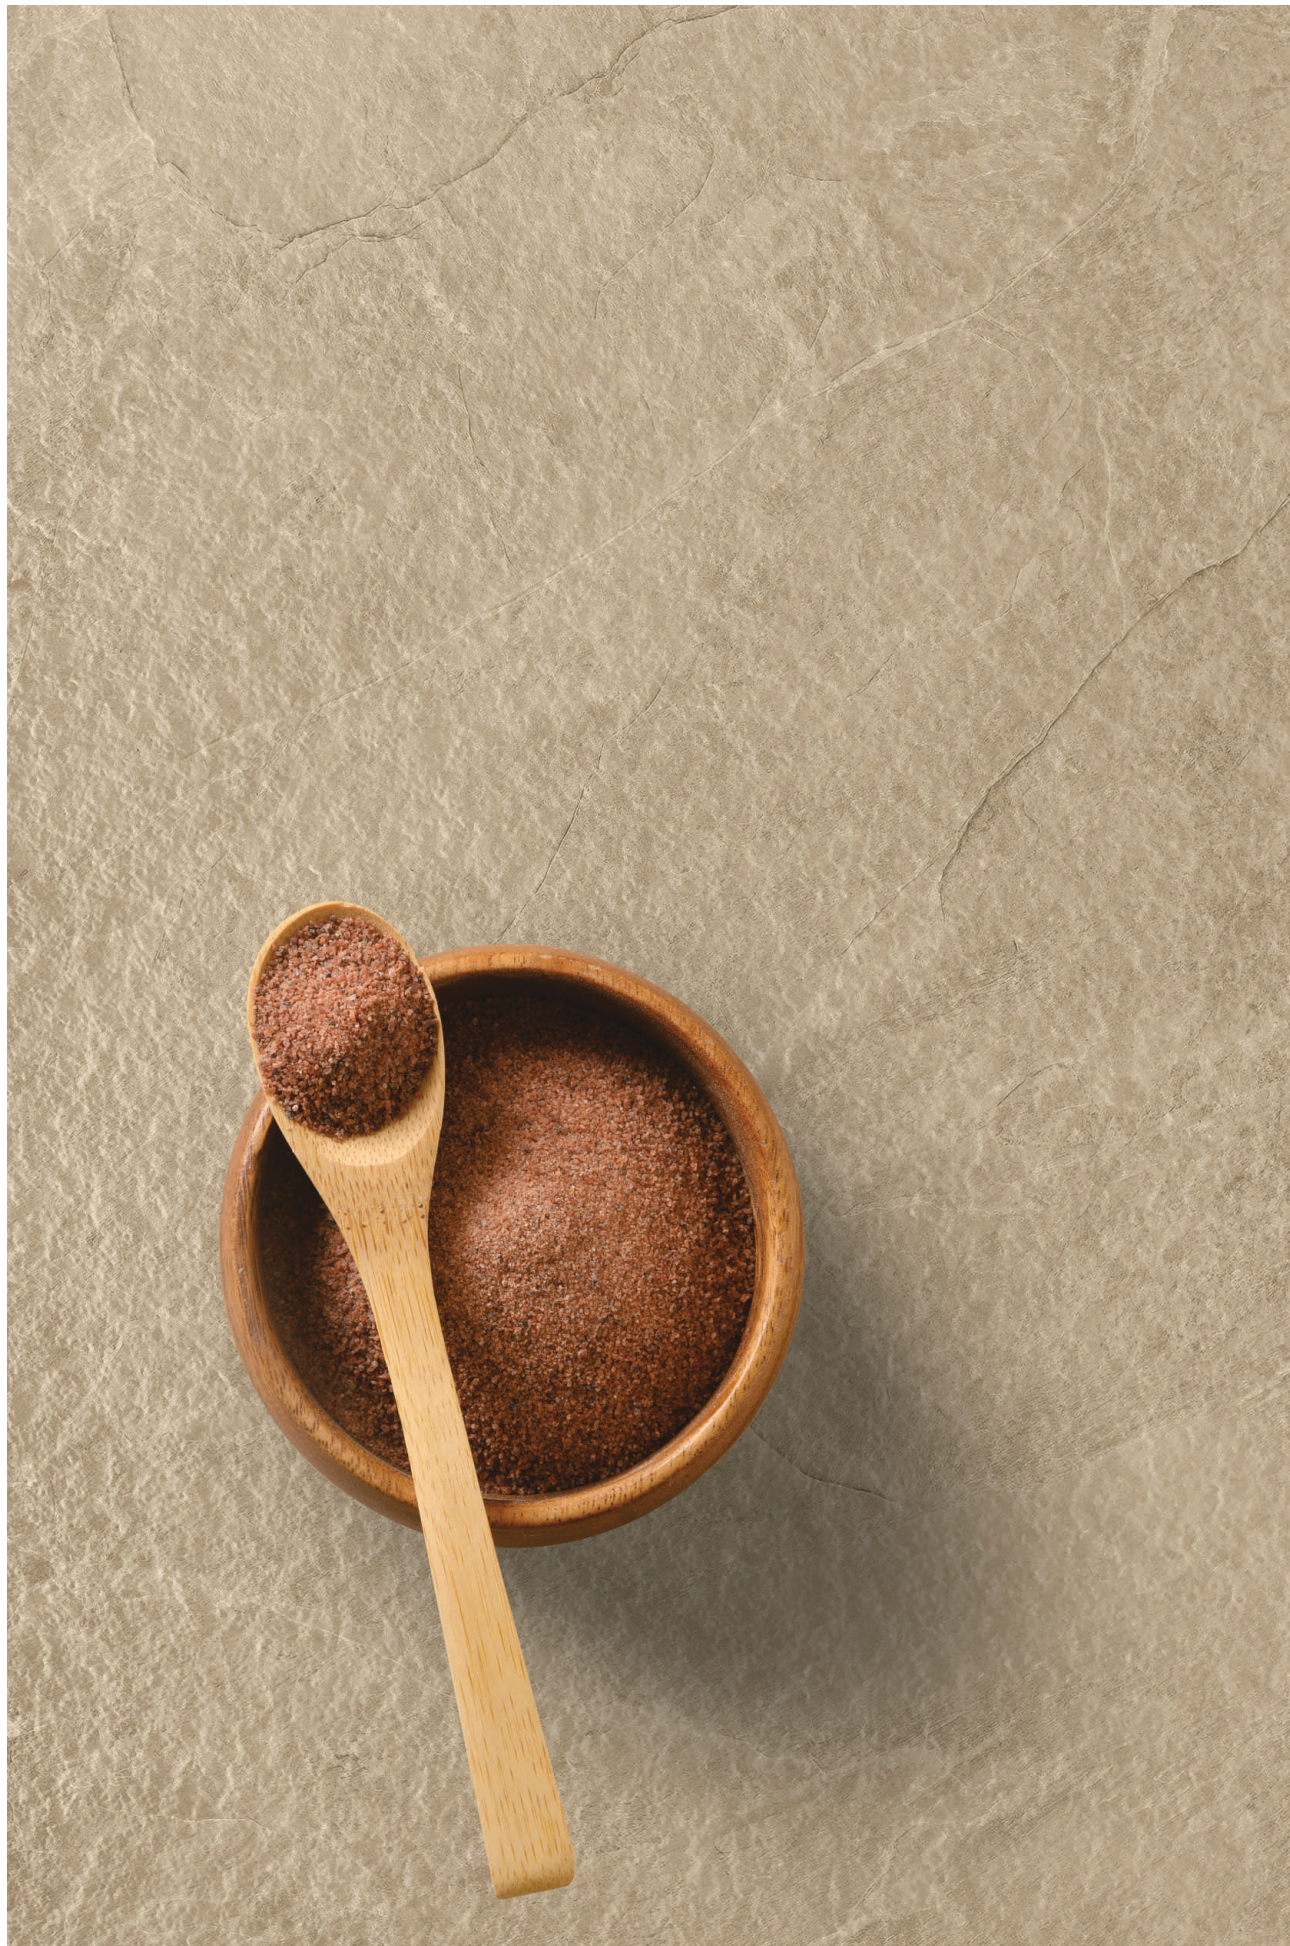

ENORME KS EVERSTONE BEIGE ROBUSTO PEDRO



V3



Actual Size Image



Size:
800x1600mm

Surface:
Robusto (Pedro Punch)



360 VIEW



WALL: ENORME KS EVERSTONE BEIGE ROBUSTO PEDRO | SIZE: 800X1600MM
SURFACE: ROBUSTO (Pedro Punch)

9mm Thickness

FLOOR: ENORME KS EVERSTONE BEIGE ROBUSTO PEDRO | SIZE: 800X1600MM | SURFACE: ROBUSTO (Pedro Punch)




WALL: ENORME KS EVERSTONE BEIGE ROBUSTO PEDRO | SIZE: 800X1600MM | SURFACE: ROBUSTO (Pedro Punch)



FLOOR: ENORME KS EVERSTONE BEIGE ROBUSTO PEDRO | SIZE: 800X1600MM | SURFACE: ROBUSTO (Pedro Punch)



ENORME KS EVERSTONE CHIARO ROBUSTO PEDRO

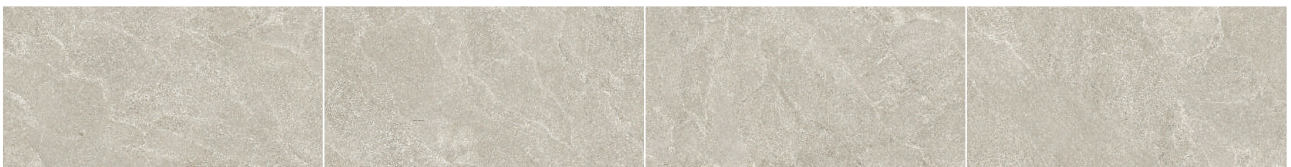

V3



Actual Size Image



Size:
800x1600mm

Surface:
Robusto (Pedro Punch)



360 VIEW



WALL: ENORME KS EVERSTONE CHIARO ROBUSTO PEDRO | SIZE: 800X1600MM
SURFACE: ROBUSTO (Pedro Punch)

9mm Thickness

FLOOR: ENORME KS EVERSTONE CHIARO ROBUSTO PEDRO | SIZE: 800X1600MM | SURFACE: ROBUSTO (Pedro Punch)



3	Office
2	Meeting Room
1	Reception
0	Waiting Area
-1	Parking


WALL & FLOOR: ENORME KS EVERSTONE CHIARO ROBUSTO PEDRO | SIZE: 800X1600MM | SURFACE: ROBUSTO (Pedro Punch)



FLOOR: ENORME KS EVERSTONE CHIARO ROBUSTO PEDRO | SIZE: 800X1600MM | SURFACE: ROBUSTO (Pedro Punch)



ENORME KS EVERSTONE SCURO ROBUSTO PEDRO

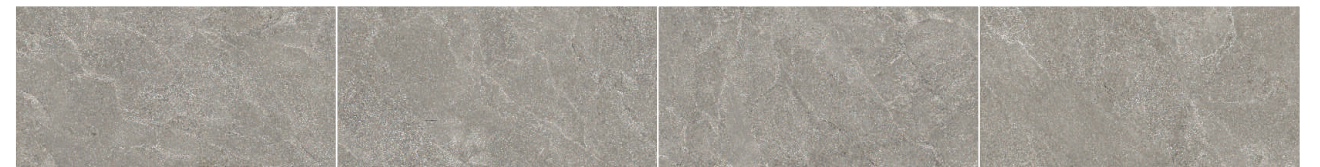

V3



Actual Size Image



Size:
800x1600mm


Surface:
Robusto (Pedro Punch)



360 VIEW



WALL: ENORME KS EVERSTONE SCURO ROBUSTO PEDRO | SIZE: 800X1600MM
SURFACE: ROBUSTO (Pedro Punch)



FLOOR: ENORME KS EVERSTONE SCURO ROBUSTO PEDRO | SIZE: 800X1600MM | SURFACE: ROBUSTO (Pedro Punch)



WALL: ENORME KS EVERSTONE SCURO ROBUSTO PEDRO | SIZE: 800X1600MM | SURFACE: ROBUSTO (Pedro Punch)




FLOOR: ENORME KS EVERSTONE SCURO ROBUSTO PEDRO | SIZE: 800X1600MM | SURFACE: ROBUSTO (Pedro Punch)

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.

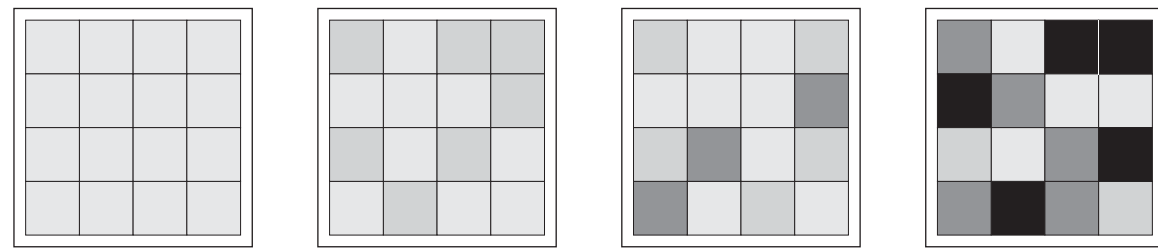

V1 Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follows:

V1 Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

PACKAGING DETAIL FOR 800X1600MM EVERSTONE COLLECTION				
Nominal Size(mm)	Thickness(mm)	Avg. weight per carton(Kgs)	No. of tiles per carton	Coverage area per carton
800x1600mm	9 mm	51.0 kgs	2	2.56 Square Meter

TECHNICAL SPECIFICATIONS FOR 800X1600MM EVERSTONE COLLECTION				
Characteristics	Requirement as per IS 15622 :2017 E ≤ 0.08 Group B I a	Requirement as per ISO 13006:2018 Ev ≤ 0.5%-Group B I a (Annex G)	Our Values	Test Method
A) Dimension & Surface Quality				
A) Dimension & Surface Quality		Rectified		
I) Length & Width		± 0.10%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side		± 0.10%	± 0.10%	
iv) Rectangularity		± 0.10%	± 0.10%	
v) Surface Flatness				
a) Center curvature (%) (max.Deviation)	± 0.5%	± 0.4%	± 0.30%	
b) Edge curvature (%) (max.Deviation)	± 0.5%	± 0.4%	± 0.30%	
c) Corner warpage (%) (max.Deviation)	± 0.5%	± 0.4%	± 0.30%	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Average 0.8<E, Individual Max 0.1%	E ≤ 0.5, Individual max 0.6%	Av 0.08 %	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm ²]	Avg. 35, Individual 32 min	Avg 35, Individual 32 min	Avg-38	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1300	1300	Min 1400	
iv) Moisture Expansion in mm/m	0.02	Test Method Available	0.02 Max	IS 13630 Part 3/ISO-10545-10
v) Scratch Hardness of surface (Mohs)	Min 5	N/A	4-6 (depends on surface)	IS 13630 Part 13
vi) Resistance to Abrasion of glazed tiles(Class I to V)	Min II	Report abrasion class and cycles passed	Class V (for VC), Class IV (for Non VC), Class III (For polished)	IS 13630 Part 11 /ISO 10545-7
vii) Coefficient of linear thermal expansion from ambient temperature to 100° C	6 X 10 ⁻⁶ K ⁻¹ max	Test Method Available	Max 5.5 X 10 ⁻⁶ K ⁻¹	IS 13630 Part 4/ ISO 10545-8
viii) Thermal Shock Resistance	10 cycle min	Test Method Available	Passed 10 cycle	IS 13630 Part 5/ISO-10545-9
ix) Craze Resistance	4 cycle @ 7.5bar min	Required	Passed 4 cycle	IS 13630 Part 9/ISO 10545-11
x) Impact Resistance as Co-efficient of Restitution (COR)	0.55 Min	Test Method Available	0.75-0.90	IS 13630 part 14/ISO 10545-5
xi) Bulk Density (gm/cc)	2.2	N.A	2.25	IS 13630 Part 2
xii) Coefficient of Friction	Where required manufacturer to declare value	Where required manufacturer to declare value	Depends upon Glazed surface	ISO 10545-17
xiii) Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistance (glazed Tiles)				
i) Stain Resistance	Min Class 1	Min Class 3	Min Class-1/ Class-3	IS 13630 Part 8 &ISO 10545-14
ii) Resistance to household chemicals	Min Class AA	Min. Class B	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Manufacturer is to state classification	Min Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner

SOMANY Bathware

SOMANY French Collection



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces — walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.




For detailed instructions scan the QR code

Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome
Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit

- 
EASY TO USE
- 
HIGH STRENGTH POLYMER FORTIFIED ADHESIVE
- 
WIDE APPLICATION RANGE
- 
HIGHLY FLEXIBLE
- 
SUITABLE FOR WET WALL SURFACES
- 
SELF - CURING ADHESIVE
- 
SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

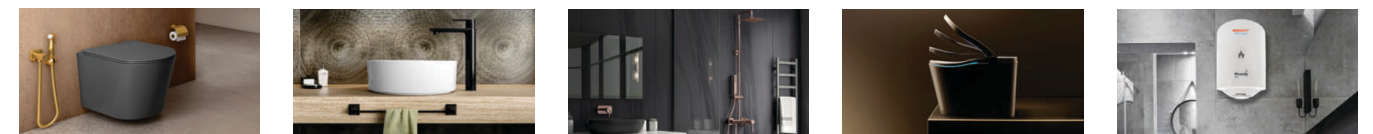

Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com