DURAGRES

EVERSTONE
collection

800x1600mm

9mm thickness



SOMANY

SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

UNIT-I / EVERSTONE / CAT / MARCH 2025


GLOWING IN EARTHY HUE,
WHISPERING TALES OF
ROCK AND SAND

EVERSTONE
collection

The power of stone, the grace of artistry

The Everstone Collection is a testament to the artistry of natural stone replication, meticulously crafted to evoke the raw, organic beauty of quarried rock. Its precision-engineered surface seamlessly blends the intricate textures and tonal variations of genuine stone, enriched by a delicately textured matte finish with a subtle sheen that enhances depth and dimension.

Developed for exceptional durability, Everstone is composed of high-density ceramic, ensuring superior resistance to scratches, stains, and moisture absorption. This makes it an ideal choice for high-traffic commercial and residential spaces, where longevity and aesthetic integrity are paramount.

Its low porosity and advanced surface treatment create a protective barrier against dirt accumulation, making it remarkably easy to clean and maintain. Additionally, its enhanced slip resistance makes it well-suited for outdoor installations, wet areas, and high-humidity environments, providing both safety and style.

1 Design 4 Shades 1 Punch

Size: **800x1600mm** | Thickness: **9mm** | Design: **1** | Shades: **4** | Punch: **1**



ENORME KS EVERSTONE AVARIO ROBUSTO PEDRO



ENORME KS EVERSTONE BEIGE ROBUSTO PEDRO



ENORME KS EVERSTONE CHIARO ROBUSTO PEDRO



ENORME KS EVERSTONE SCURO ROBUSTO PEDRO



Actual Size Image

POWERED BY
Robusto
surface

Engineered to withstand temperature fluctuations, UV exposure, and heavy footfall, the Everstone Collection is a versatile solution for indoor flooring, outdoor patios, pool decks, and facades, delivering an enduring blend of natural allure and cutting-edge performance.

Size	Surface	Thickness	Random
800x1600mm - Punch (PEDRO)	Robusto	9	V3

TECHNICAL FEATURES



MOH'S SCALE HARDNESS > 7

High density sintering for a robust surface which is a crucial factor to consider when choosing tiles, especially for high-traffic & high-stress areas.



ABRASION RESISTANCE PEI-V

Our tiles are designed to withstand the test of time, even in high-traffic areas. Their superior abrasion resistance ensures durability and maintains their pristine appearance for years.



SLIP RESISTANCE R 10

R 10 slip resistance tiles are a great choice for areas that may get wet. They offer a good balance of slip resistance and aesthetics, making them suitable for both residential and commercial settings.



WATER REPELLENT



BLENDED SMOOTHNESS



NON-REFLECTIVE



EASY TO CLEAN



ABRASION AND WEAR-RESISTANT



HYGIENIC AND SAFE



RESISTS THERMAL SHOCKS



FROST-PROOF



RESISTS LOAD AND STRESS



RESISTS CHEMICALS



RESISTS HIGH TEMPERATURES

APPLICATION AREAS



RESIDENTIAL AREAS



COMMERCIAL AREAS



HOSPITALS



SHOPS AND MALLS



HOTELS AND RESTAURANTS



SCHOOLS AND COLLEGES



OUTDOOR FURNITURE



PUBLIC PLACES

EVERSTONE
collection

ENORME KS
EVERSTONE
AVARIO ROBUSTO
PEDRO

ENORME KS
EVERSTONE
BEIGE ROBUSTO
PEDRO


ENORME KS
EVERSTONE
CHIARO ROBUSTO
PEDRO

ENORME KS
EVERSTONE
SCURO ROBUSTO
PEDRO



800x1600mm

Size: **800x1600mm** | Thickness: **9mm** | Design: **1** | Shades: **4** | Punch: **1**

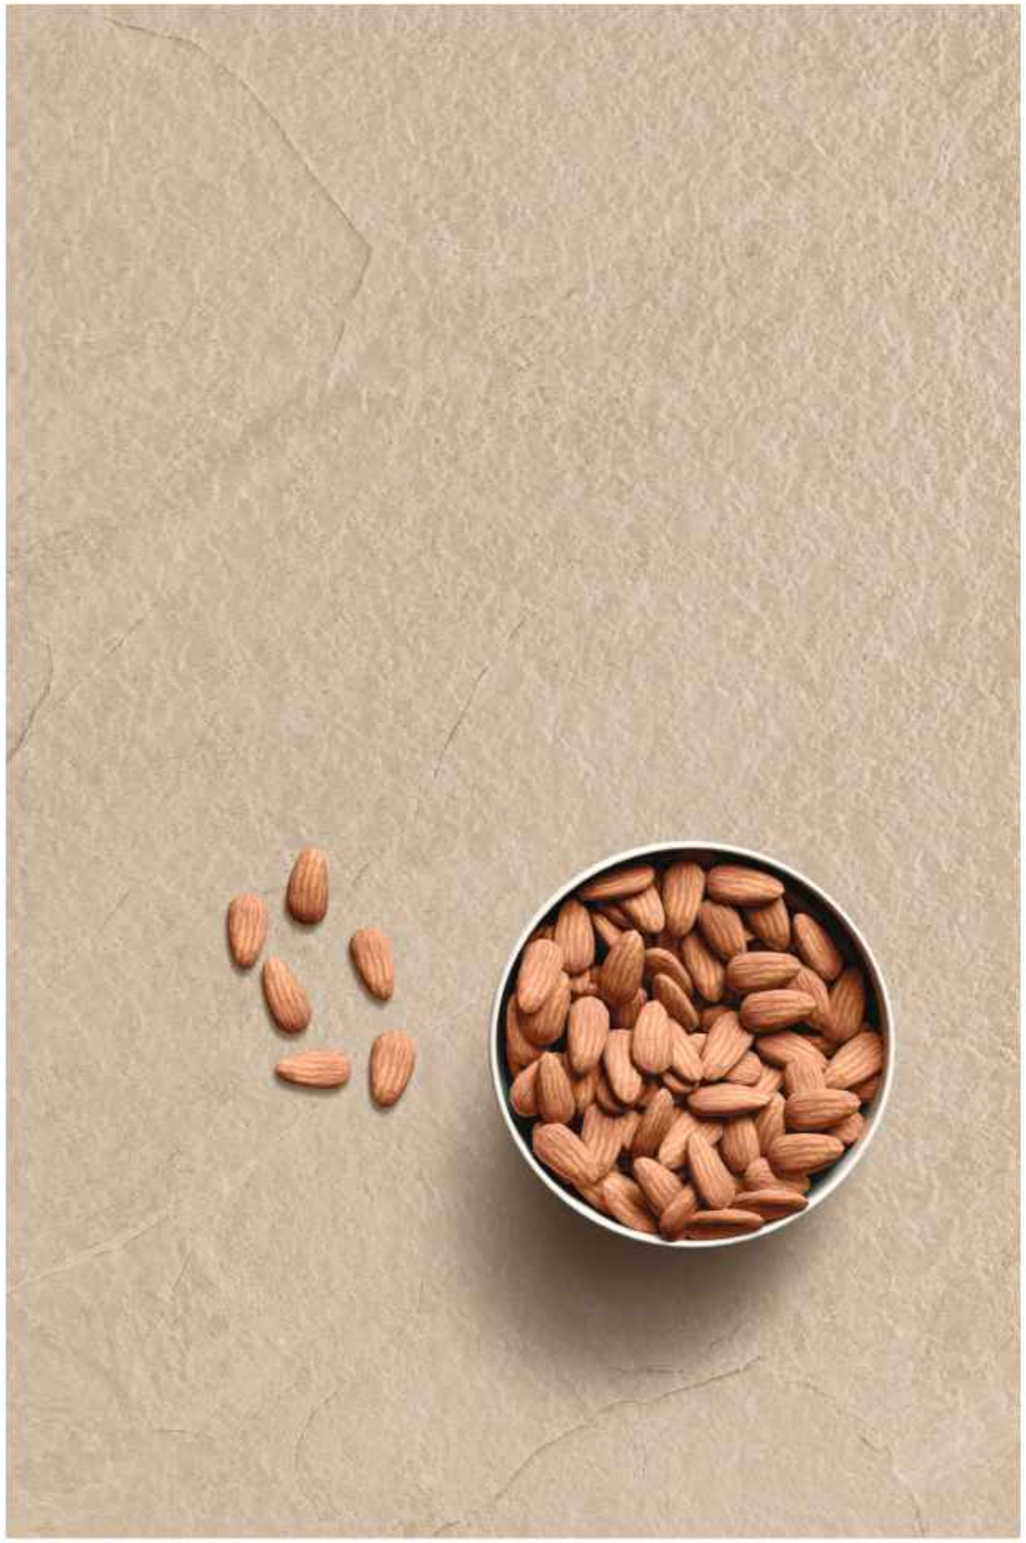

ENORME KS EVERSTONE AVARIO ROBUSTO PEDRO





V3



Actual Size Image

Size:
800x1600mm

Surface:
Robusto (Pedro Punch)

360 VIEW



WALL: **ENORME KS EVERSTONE AVARIO ROBUSTO PEDRO** | SIZE: **800X1600MM**
SURFACE: **ROBUSTO** (Pedro Punch)

9mm Thickness


FLOOR: **ENORME KS EVERSTONE AVARIO ROBUSTO PEDRO** | SIZE: **800X1600MM** | SURFACE: **ROBUSTO** (Pedro Punch)



WALL: **ENORME KS EVERSTONE AVARIO ROBUSTO PEDRO** | SIZE: **800X1600MM** | SURFACE: **ROBUSTO** (Pedra Punch)



FLOOR: **ENORME KS EVERSTONE AVARIO ROBUSTO PEDRO** | SIZE: **800X1600MM** | SURFACE: **ROBUSTO** (Pedra Punch)

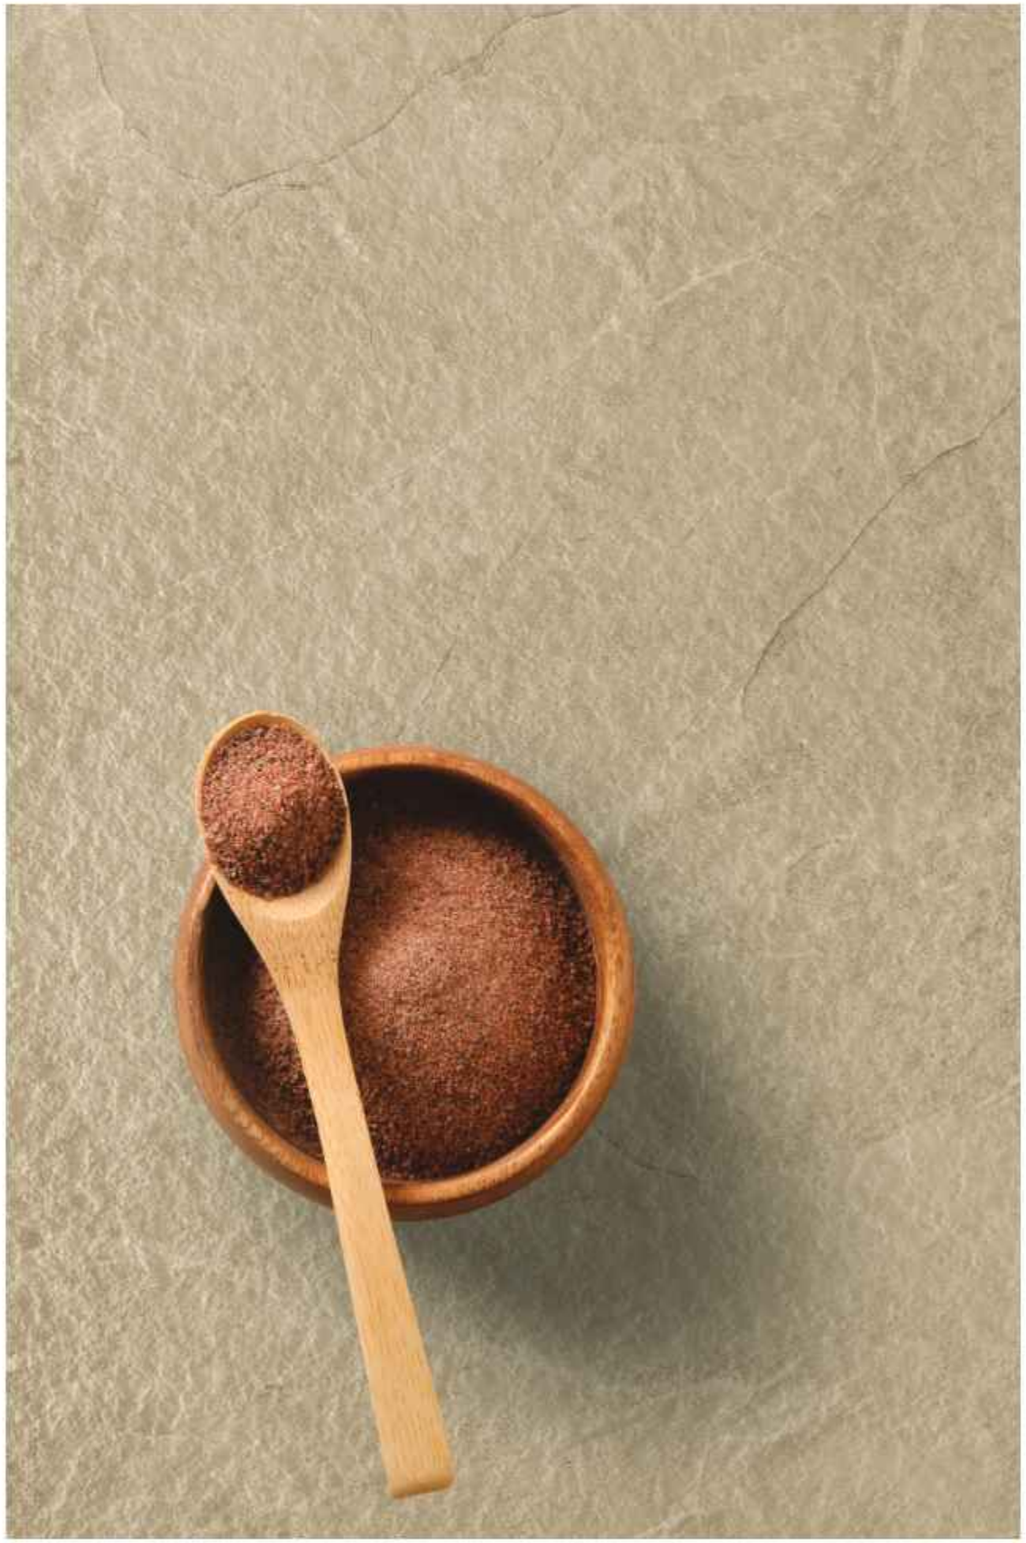

ENORME KS EVERSTONE BEIGE ROBUSTO PEDRO



V3



Actual Size Image

Size:
800x1600mm

Surface:
Robusto (Pedro Punch)


360 VIEW



WALL: **ENORME KS EVERSTONE BEIGE ROBUSTO PEDRO** | SIZE: **800X1600MM**
SURFACE: **ROBUSTO** (Pedro Punch)

9mm Thickness


FLOOR: **ENORME KS EVERSTONE BEIGE ROBUSTO PEDRO** | SIZE: **800X1600MM** | SURFACE: **ROBUSTO** (Pedro Punch)

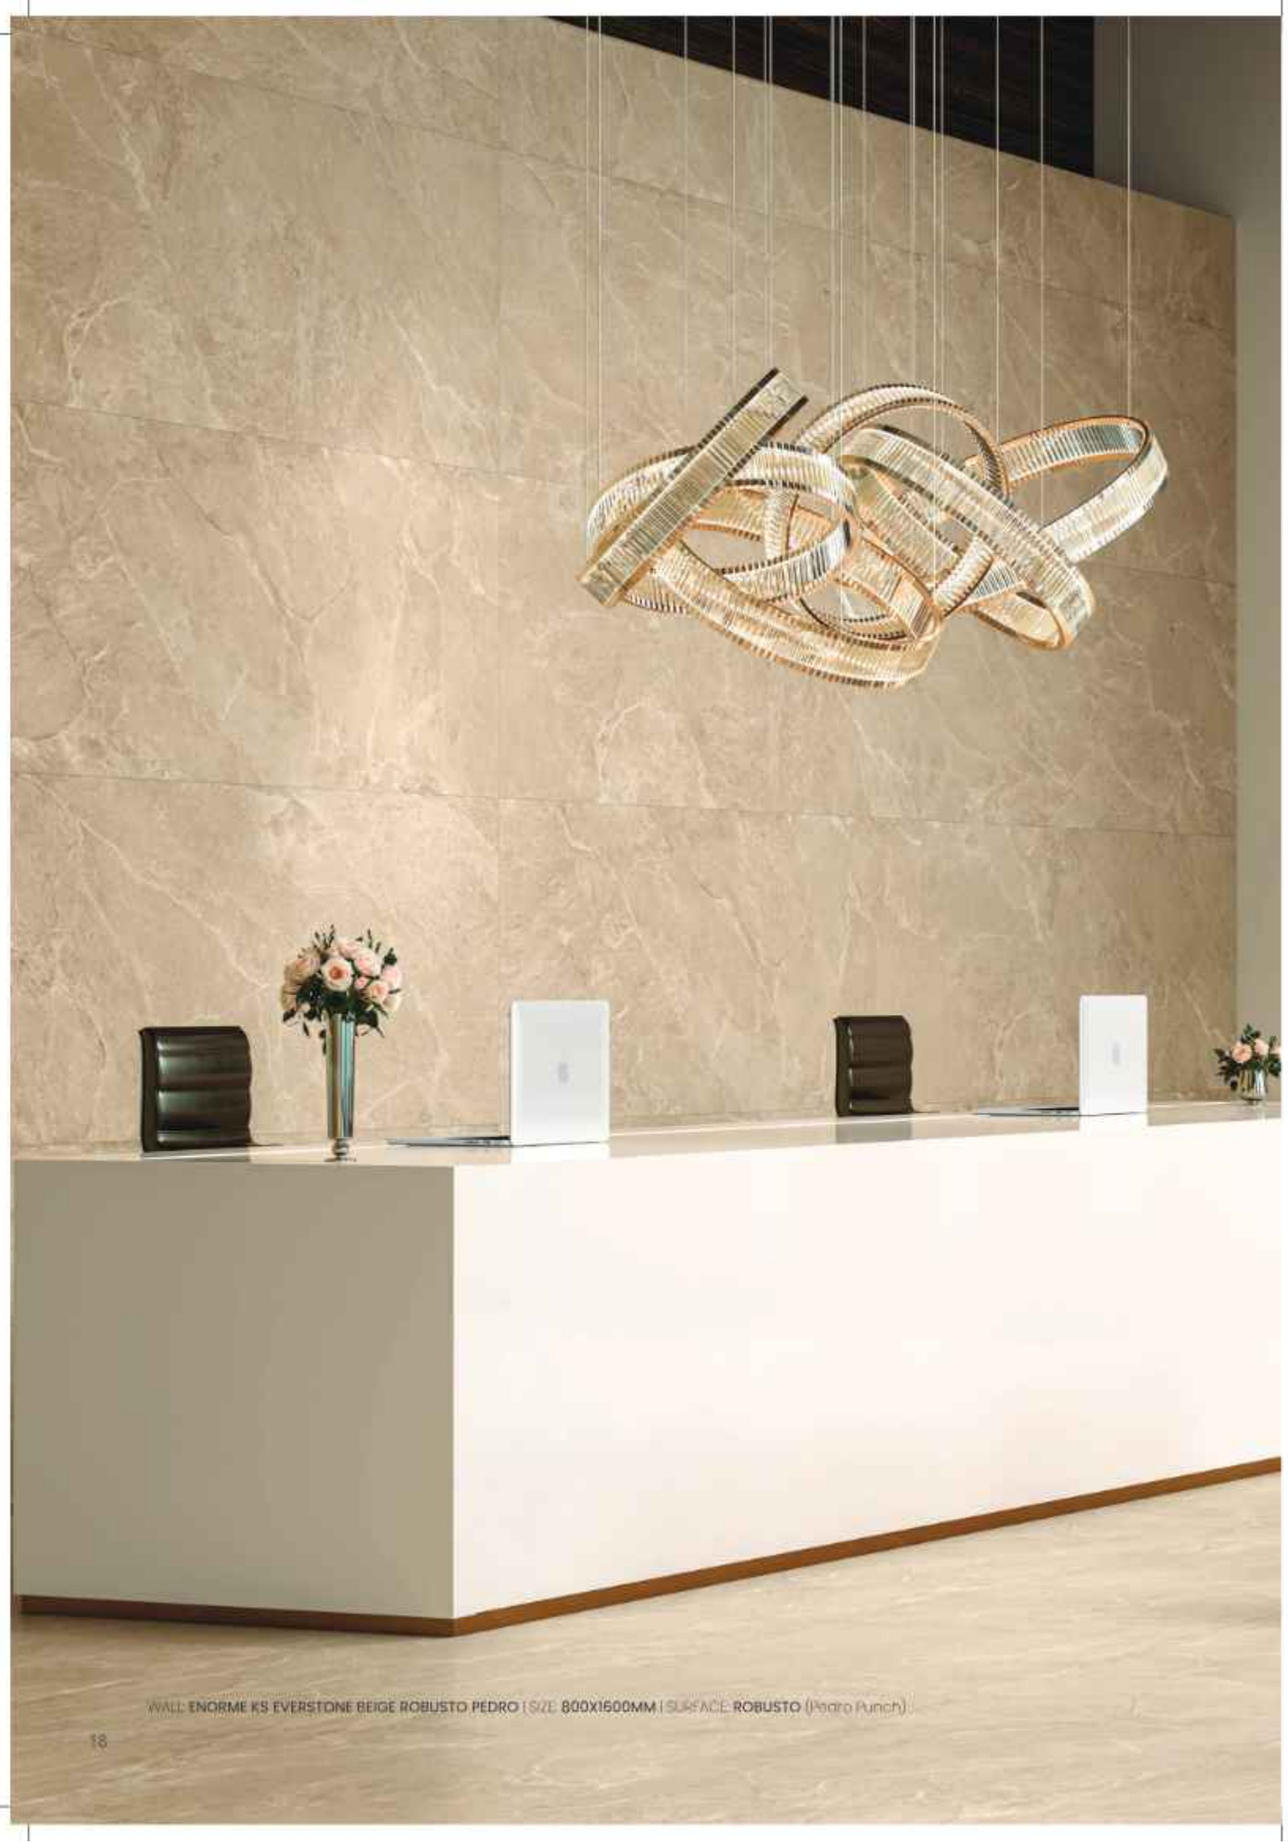

WALL: **ENORME KS EVERSTONE BEIGE ROBUSTO PEDRO** | SIZE: **800X1600MM** | SURFACE: **ROBUSTO** (Pedro Punch)



FLOOR: **ENORME KS EVERSTONE BEIGE ROBUSTO PEDRO** | SIZE: **800X1600MM** | SURFACE: **ROBUSTO** (Pedro Punch)

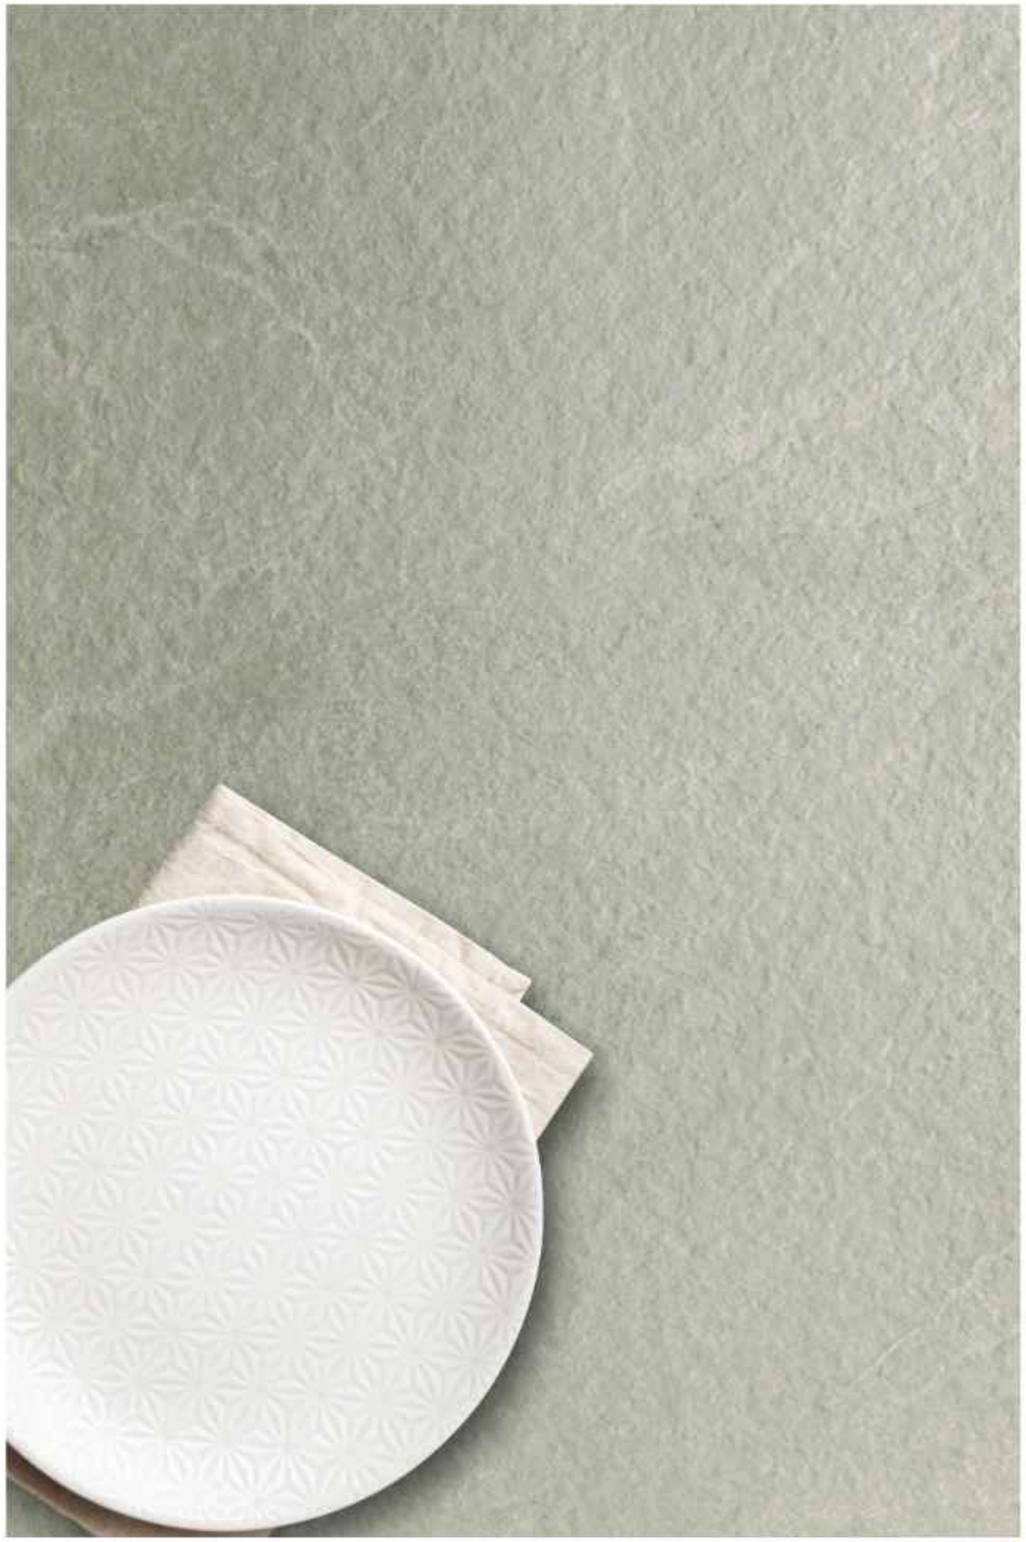

ENORME KS EVERSTONE CHIARO ROBUSTO PEDRO





V3



Actual Size Image

Size:
800x1600mm

Surface:
Robusto (Pedro Punch)

360 VIEW



WALL: **ENORME KS EVERSTONE CHIARO ROBUSTO PEDRO** | SIZE: **800X1600MM**
SURFACE: **ROBUSTO** (Pedro Punch)

9mm Thickness


FLOOR: **ENORME KS EVERSTONE CHIARO ROBUSTO PEDRO** | SIZE: **800X1600MM** | SURFACE: **ROBUSTO** (Pedro Punch)



WALLS, FLOOR: **ENORME KS EVERSTONE CHIARO ROBUSTO PEDRO** | SIZE: **800X1500MM** | SURFACE: **ROBUSTO** (Pedra Punch)



FLOOR: **ENORME KS EVERSTONE CHIARO ROBUSTO PEDRO** | SIZE: **800X1500MM** | SURFACE: **ROBUSTO** (Pedra Punch)

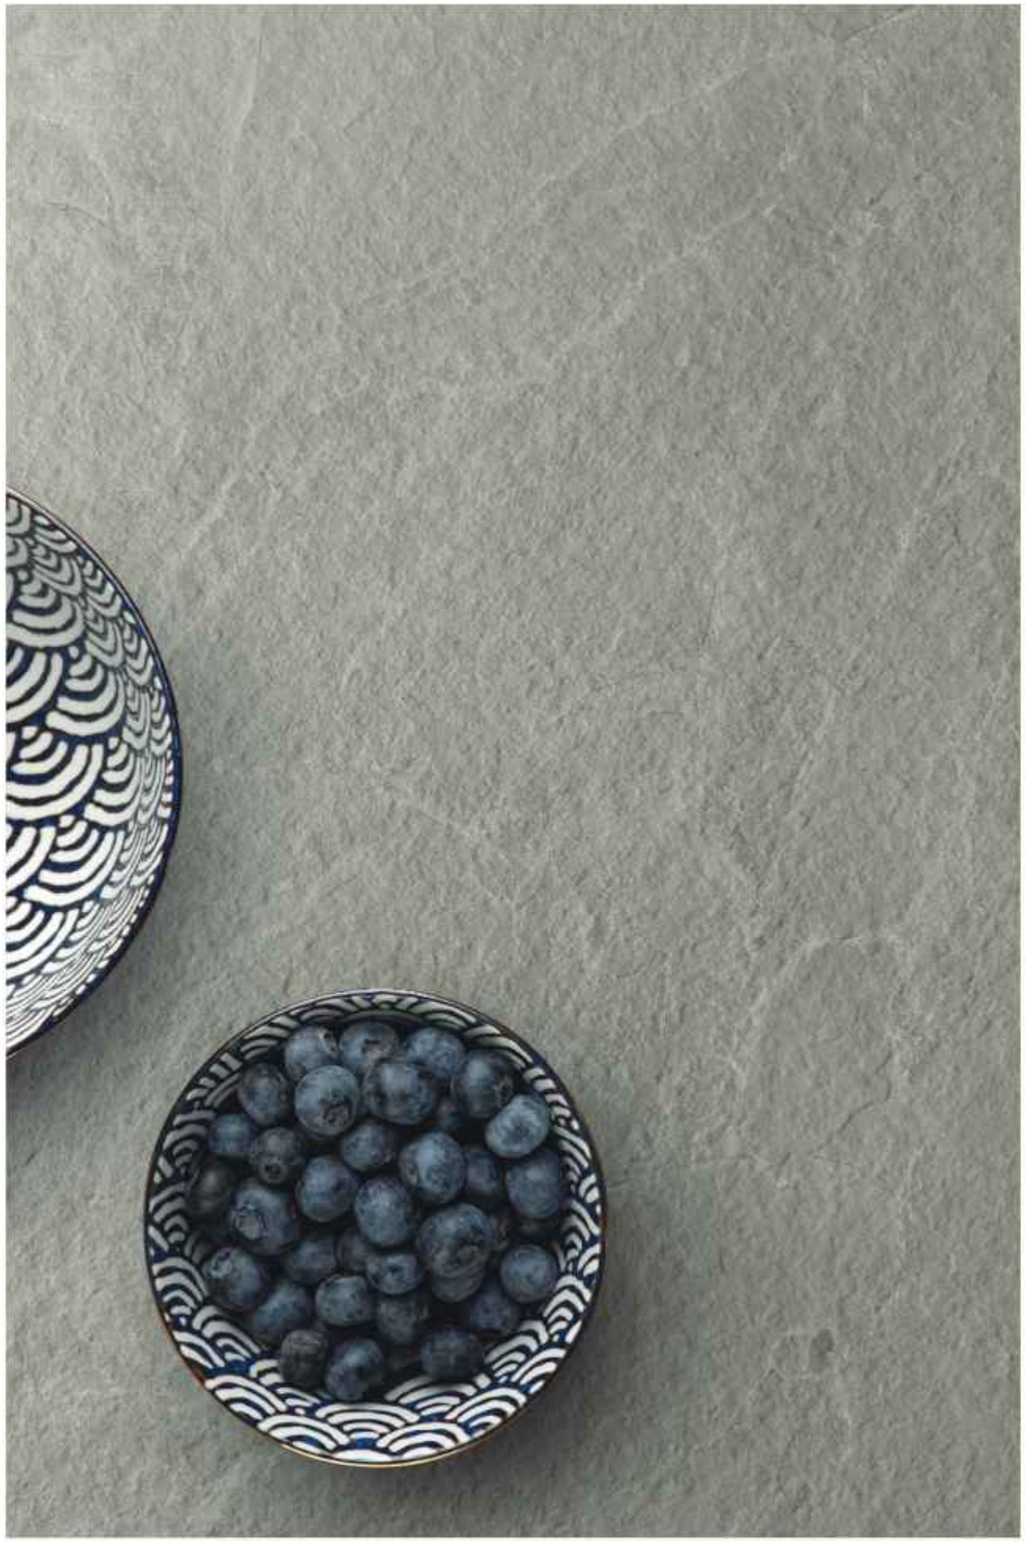

ENORME KS EVERSTONE SCURO ROBUSTO PEDRO





V3



Actual Size Image

Size:
800x1600mm

Surface:
Robusto (Pedro Punch)

360 VIEW



WALL: **ENORME KS EVERSTONE SCURO ROBUSTO PEDRO** | SIZE: **800X1600MM**
SURFACE: **ROBUSTO** (Pedra Punch)

9mm Thickness

FLOOR: **ENORME KS EVERSTONE SCURO ROBUSTO PEDRO** | SIZE: **800X1600MM** | SURFACE: **ROBUSTO** (Pedra Punch)


WALL **ENORME KS EVERSTONE SCURO ROBUSTO PEDRO** | SIZE **800X1600MM** | SURFACE **ROBUSTO** (Pedra Punch)

FLOOR **ENORME KS EVERSTONE SCURO ROBUSTO PEDRO** | SIZE **800X1600MM** | SURFACE **ROBUSTO** (Pedra Punch)

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.

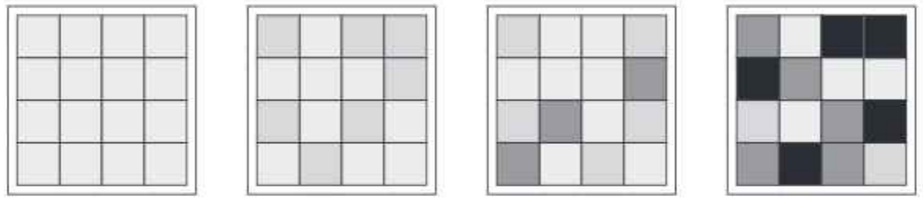

V1 Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation V3 Moderate Variation V4 Substantial Variation

PACKAGING DETAIL FOR 800X1600MM EVERSTONE COLLECTION				
Nominal Size(mm)	**Thickness(mm)**	**Avg. weight per carton(Kgs)**	**No. of tiles per carton**	**Coverage area per carton**
800x1600mm	9 mm	51.0 kgs	2	2.56 Square Meter

TECHNICAL SPECIFICATIONS FOR 800X1600MM EVERSTONE COLLECTION					
Characteristics	**Requirement as per IS 15622 :2017 E ≤ 0.08 Group B I a**		**Requirement as per ISO 13006:2018 Ev≤ 0.5%-Group B I a (Annex G)**	**Our Values**	**Test Method**
A) Dimension & Surface Quality		**Rectified**			
i) Length & Width		± 0.10%	± 0.30%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0%		± 5.0%	± 4.0%	
iii) Straightness of Side		± 0.10%	± 0.30%	± 0.10%	
iv) Rectengularity		± 0.10%	± 0.30%	± 0.10%	
v) Surface Flatness					
a) Center curvature (%) (max.Deviation)	± 0.5%		± 0.4%	± 0.30%	
b) Edge curvature (%) (max.Deviation)	± 0.5%		± 0.4%	± 0.30%	
c) Corner warpage (%) (max.Deviation)	± 0.5%		± 0.4%	± 0.30%	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects		Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties					
i) Water Absorption	Average 0.6<E, Individual Max 0.1%		E≤ 0.5, Individual max 0.6%	Av 0.08 %	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture (N/mm2)	Avg. 35, Individual 32 min		Avg. 35, Individual 32 min	Avg-38	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1300		1300	Min 1400	
iv) Moisture Expansion in mm/m	0.02		Test Method Available	0.02 Max	IS 13630 Part 3/ISO-10545-10
v) Scratch Hardness of surface (Mohs)	Min 5		N/A	4-6 (depends on surface)	IS 13630 Part 13
vi) Resistance to Abrasion of glazed tiles(Class I to V)	Min II		Report abrasion class and cycles passed	Class V (for VC), Class IV (for Non VC), Class III (For polished)	IS 13630 Part 11 /ISO 10545-7
vii) Coefficient of linear thermal expansion from ambient temperature to 100° C	6 X 10 $^{-6}$ K^{-1} max		Test Method Available	Max 5.5 X 10^{-6} K^{-1}	IS 13630 Part 4/ ISO 10545-8
viii) Thermal Shock Resistance	10 cycle min		Test Method Available	Passed 10 cycle	IS 13630 Part 5/ISO-10545-9
ix) Crazing Resistance	4 cycle @ 7.5bar min		Required	Passed 4 cycle	IS 13630 Part 9/ISO 10545-11
x) Impact Resistance as Co-efficient of Restitution (COR)	0.55 Min		Test Method Available	0.75-0.90	IS 13630 part 14/ISO 10545-5
xi) Bulk Density (gm/cc)	2.2		N.A	2.25	IS 13630 Part 2
xii) Coefficient of Friction	Where required manufacturer to declare value		Where required manufacturer to declare value	Depends upon Glazed surface	ISO 10545-17
xiii) Frost Resistance	Required		Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistance (glazed Tiles)					
i) Stain Resistance	Min Class 1		Min Class 3	Min Class-1/ Class-3	IS 13630 Part 8 &ISO 10545-14
ii) Resistance to household chemicals	Min Class AA		Min. Class B	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed		Manufacturer is to state classification	Min Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome
Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com