Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)



UNIT 03 RANGE VOL 1 | MARCH 2026

ITALMARMI

ELITA & SENSO
collection

75 x 300mm | 200 x 200mm | 300 x 262mm
305 x 320mm | 300 x 300mm | 600 x 1200mm



Application Areas

RESTAURANTS

RETAIL MALLS

SPA & WELLNESS

RESIDENTIAL AREAS

LIVING SPACES

FITTED KITCHENS & BATHROOMS

AIRPORTS

HOTELS

SHOPS

OFFICES

MUSEUMS

SHOWROOMS

Technical Features

SUITABLE FOR INDOORS & OUTDOORS

HIGHLY UV RESISTANT

FIRE & HEAT RESISTANT

SCRATCH RESISTANT

THERMAL SHOCK RESISTANT

HYGIENIC SURFACE

STAIN RESISTANT

EASY TO CLEAN

FROST RESISTANT

CHEMICAL RESISTANT

Wall: **Tegula Romano Opaco,** Size: **75x300mm**





Wall: **Tegula Crystallo Opaco,** Size: **75x300mm**



Reception Counter: **Tegula Citadel Lucido,** Size: **75x300mm**

TEGULA SERIES

75x300mm (Glossy & Matt Finish)

Italmarmi
from the house of SOMANY

Tegula Furossa Lucido



Tegula Amazona Lucido



Tegula Furossa Opaco



Tegula Amazona Opaco



Tegula Turkish Lucido



Tegula Romano Lucido



Tegula Turkish Opaco



Tegula Romano Opaco

Tegula Citadel Lucido



Tegula Citadel Opaco



Size	Surfaces	Thickness	Randoms
75x300mm	Lucido - Glossy Finish Opaco - Matt Finish	7.4mm	16



Serving Counter: **Tegula Antiqa Lucido,** Size: **75x300mm**

TEGULA SERIES

75x300mm (Glossy & Matt Finish)

Tegula Crystallo Lucido

Tegula Onyx Lucido

Tegula Crystallo Opaco

Tegula Onyx Opaco

Tegula Antiqa Lucido



Tegula Branca Lucido



Tegula Antiqa Opaco



Tegula Branca Opaco



Mattoni Tan Lucido



Mattoni Tan Opaco



Size	Surfaces	Thickness	Randoms
75x300mm	Lucido - Glossy Finish Opaco - Matt Finish	7.4mm	16



Wall: **Mattoni Oyster Opaco**, Size: **75x300mm**

MATTONI SERIES

75x300mm (Matt Finish)

Italmarmi
from the house of SOMANY

Mattoni Oyster Opaco



Mattoni Castle Opaco



Mattoni Luxura Opaco



Mattoni Natural Opaco



Mattoni Grey Opaco



Size	Surface	Thickness	Randoms
75x300mm	Opaco - Matt Finish	7.4mm	16



Floor: **Kaliedo Vintage,** Size: **200x200mm**

ELITA & SENSO COLLECTION

200x200mm (Matt Carving)

Italmarmi
from the house of SOMANY

Kaliedo Vintage — Randoms: **9**



Blooming Cream — Randoms: **1**



Serena Classic — Randoms: **6**



Swatch Grey — Randoms: **16**



Swatch Tan — Randoms: **16**



Size
200x200mm

Surface
Matt Carving

Thickness
8mm



Wall: **Hexion Tan,** Size: **300x262mm**

MOSAIC SERIES

Italmarmi
from the house of SOMANY

300x262mm

Hexion Tan



Mosaic Pattern : Hexagonal
Thickness : ~9mm
Finish : Random (ShapeTech & Carving)
Mosaic Size : 98x98mm
Sheet Size : 300x262mm
Mosaics : 9 Pcs / Sheet

305x320mm

Miter Beige

Mosaic Pattern : Herringbone
Thickness : ~9mm
Finish : Random (Lux & Velvet)
Mosaic Size : ~23x73mm
Sheet Size : ~305x320mm
Mosaics : 42 Pcs / Sheet

300x300mm

Domino Oyster



Mosaic Pattern : Square
Thickness : ~9mm
Finish : Random (ShapeTech & Carving)
Mosaic Size : ~23x23mm & 48x48mm
Sheet Size : ~300x300mm
Mosaics : 72 Pcs & 18 Pcs / Sheet

Domino Grey



Mosaic Pattern : Square
Thickness : ~9mm
Finish : Random (ShapeTech & Carving)
Mosaic Size : ~23x23mm & 48x48mm
Sheet Size : ~300x300mm
Mosaics : 72 Pcs & 18 Pcs / Sheet

Branca Weave



Mosaic Pattern : Basket Wave
Thickness : ~9mm
Finish : Random (Lux & Quill Glam)
Mosaic Size : ~45x51mm
Sheet Size : ~300x300mm
Mosaics : 36 Pcs / Sheet



Wall: **Antiqa Pixel 60,** Size: **600x1200mm**

INTRICA SERIES

600x1200mm (Intrica Effect)

Italmarmi from the house of SOMANY

Branca Motif 60

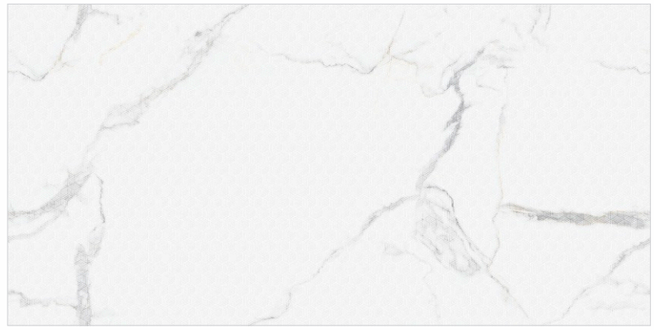

Surface	Thickness	Randoms
Intrica Effect	8.2mm	3

Antiqa Pixel 60



Surface	Thickness	Randoms
Intrica Effect	8.2mm	1

Antigua Cube 60

Surface	Thickness	Randoms
Intrica Effect	8.2mm	5



Wall: **Amazona Petal 60**, Size: **600x1200mm**

INTRICA SERIES

600x1200mm (Intrica Effect)

Italmarmi from the house of SOMANY

Amazona Petals 60



Surface	Thickness	Randoms
Intrica Effect	8.2mm	3

Crystallo Reverb 60

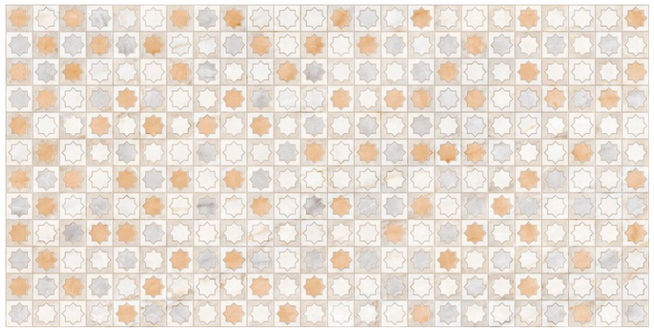

Surface	Thickness	Randoms
Intrica Effect	8.2mm	1

Romano Honeycomb 60



Surface	Thickness	Randoms
Intrica Effect	8.2mm	3



Wall: **Citadel Leaf 60**, Size: **600x1200mm**

INTRICA SERIES

600x1200mm (Intrica Effect)

Italmarmi
from the house of SOMANY

Citadel Leaf 60

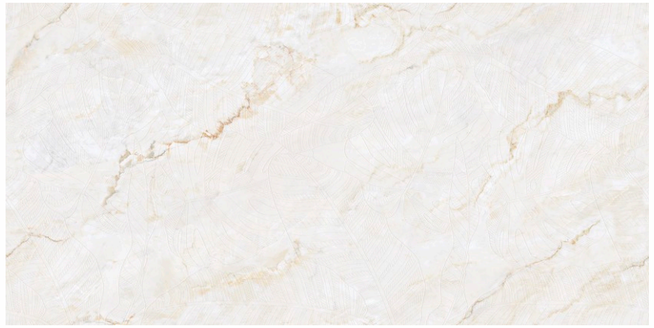

Surface	Thickness	Randoms
Intrica Effect	8.2mm	3

Turkish Vortex 60

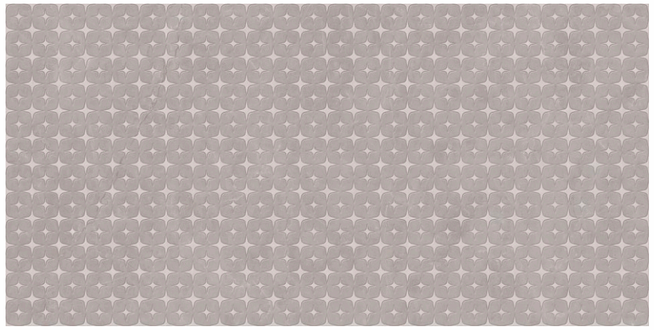

Surface	Thickness	Randoms
Intrica Effect	8.2mm	5

Furossa Decoart 60



Surface	Thickness	Randoms
Intrica Effect	8.2mm	2

TECHNICAL SPECIFICATION FOR ELITA & SENSO COLLECTION

Characteristics	Requirement as per IS 15622 :2017 0.08< E <3% Group B I b	Requirement as per ISO 13006:2018 ≤ 0.5% Group B I a	Our Values	Test Method
Dimension & Surface Quality				
Length & Width %	± 0.5%	± 0.6%	± 0.50%	IS 13630 Part 1 / ISO 10545-2
Thickness %	± 10.0%	± 5.0%	± 5.0%	
Straightness of Side %	± 0.50%	± 0.50%	± 0.50%	
Rectangularity %	± 0.60%	± 0.50%	± 0.50%	
Surface Flatness				
Center Curvature (%) (Max. Deviation)	± 0.75%	± 0.50%	± 0.50 %	
Edge Curvature (%) (Max. Deviation)	± 0.75%	± 0.50%	± 0.50 %	
Corner Warpage (%) (Max. Deviation)	± 0.75%	± 0.50%	± 0.50 %	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	Avg. 0.08<E<3%, Individual 3.3 max	Avg. 0.5 %, Individual 0.6% max	Avg. <0.5%	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm²]	Avg. 30, Individual 27 min	Avg. 35, Individual 32 Min	Avg. > 35	IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	1100 N	Min 1300 N	Min. 1300 N	
Moisture Expansion in mm/m	0.02	Test Method Available	Max 0.02	IS 13630 Part 3 / ISO-10545-10
Scratch Hardness of Surface (Mohs)	Min 5	N/A	Min 6	IS 13630 Part 13
Resistant to Abrasion of Glazed Tiles (Class I to V)	Min II	Min Class II	Gr IV	IS 13630 Part 11 /ISO 10545-7
Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C	7 X 10^{-6} K^{-1} Max	Test Method Available	Max 6 X 10^{-6} K^{-1} Max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistant	10 Cycle Min	Required	10 Cycle Passed	IS 13630 Part 5/ISO-10545-9
Crazing Resistant	4 Cycle @ 7.5 Bar Min	N/A	4 Cycle Passed	IS 13630 Part 9/ISO 10545-11
Impact Resistant as Coefficient of Restitution (COR)	0.55 Min	Test Method Available	0.55 Min	IS 13630 Part 14/ISO 10545-5
Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
Stain & Chemical Resistant				
Stain Resistant	Not Available	Min Class 3	Class 2	IS 13630 Part 8 & I SO 10545-14
Resistant to Household Chemicals	Test Method Available	Min B	Min Class AA	IS 13630 Part 8 / ISO 10545-13
Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Test Method Available	Declared Value[f]	A	

PACKAGING DETAIL FOR ELITA & SENSO COLLECTION

Nominal Size (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
200x200mm (Unrectified)	8.0	13.0	19	0.76sq.mtr./8.18sq.ft.

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

TECHNICAL SPECIFICATION FOR ELITA & SENSO COLLECTION

CHARACTERISTICS	Requirment as per IS 15622: 2017 E > 10 Group BIII	Requirements as per ISO 13006: 2018 E > 10 Group BIII	OUR VALUES	TEST METHOD
Dimension & Surface Quality				
Length & Width %	± 0.5%	± 0.6%	± 0.5%	IS 13630 Part 1 / ISO 10545-2
Thickness %	± 7.0%	± 10.0%	± 7.0%	
Straightness of Side %	± 0.2%	± 0.5%	± 0.2%	
Rectangularity %	± 0.3%	± 0.5%	± 0.3%	
Surface Flatness				
Center Curvature (%) (Max. Deviation)	± 0.3%	± 0.5%	± 0.3 %	
Edge Curvature (%) (Max. Deviation)	± 0.3%	± 0.5%	± 0.3 %	
Corner Warpage (%) (Max. Deviation)	± 0.3%	± 0.5%	± 0.3 %	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	E ≥ 10 % When it Exceeds 20 % This Shall be Indicated by the Manufacturer	E ≥ 10 % When it Exceeds 20 % This Shall be Indicated by the Manufacturer	Avg. 10-20 %	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm²]	Min 12	Avg. Min 12	Avg. > 12	IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	Min 200	Min.200	Min. 200	
Scratch Hardness of Surface (Mohs)	Min 3	N/A	Min 3	IS 13630 Part 13
Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C	9 X 10^{-6} K^{-1} Max	N/A	Max 8 X 10^{-6} K^{-1} Max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistant	10 Cycle Min	Test Method Available	10 Cycle Min	IS 13630 Part 5/ISO-10545-9
Crazing Resistant	4 Cycle @ 7.5 Bar Min	Manufacturer to Declare	4 Cycle @ 7.5 Bar Min	IS 13630 Part 9/ISO 10545-11
Stain & Chemical Resistant				
Stain Resistant	Min Class 1	Min Class 3	Class 1	IS 13630 Part 8 & ISO 10545-14 / ISO 10545-13
Resistant to Household Chemicals	Min Class AA	Test Method Available	Min Class AA	
Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if Agreed	Test Method Available	Min Class AA	

PACKAGING DETAIL FOR ELITA & SENSO COLLECTION

Nominal Size (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
75x300mm (Rectified)	7.4	12.9	44	0.99sq.mtr./10.66sq.ft.

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

TECHNICAL SPECIFICATION FOR ELITA COLLECTION

Characteristics	Requirement as per IS 15622 :2017 E ≤ 0.08 Group B I a	Requirement as per ISO 13006:2018 ≤ 0.5% Group B I a	Our Values	Test Method
Dimension & Surface Quality				
Length & Width %	± 0.10%	± 0.5%	± 0.10%	IS 13630 Part 1 / ISO 10545-2
Thickness %	± 5.0%	± 5.0%	± 3.0%	
Straightness of Side %	± 0.10%	± 0.50%	± 0.10%	
Rectangularity %	± 0.10%	± 0.60%	± 0.10%	
Surface Flatness				
Center Curvature (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Edge Curvature (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Corner Warpage (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	Avg. ≤ 0.08%, Individual Max.0.1%	Avg. ≤ 0.5 %, Individual 0.6% max	<0.08%, Individual Max 0.1%	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm²]	Avg. 35, Individual 32 Min	Avg. 35, Individual 32 min	Avg. > 35, Individual 32	IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	1300	Min.1300	Min. 1300	
Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3 / ISO-10545-10
Scratch Hardness of Surface (Mohs)	Min 5	N/A	Min 3	IS 13630 Part 13
Resistant to Abrasion of Glazed Tiles (Class I to V)	Min II	Abrasion Class & Cycle passed	PEI III	IS 13630 Part 11 /ISO 10545-7
Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C	6 X 10^{-6} K^{-1} Max	Test Method Available	Max 6 X 10^{-6} K^{-1} max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistant	10 Cycle Min	Required	10 Cycle Passed	IS 13630 Part 5/ISO-10545-9
Crazing Resistant	4 Cycle @ 7.5 Bar Min	Required	4 Cycle Passed	IS 13630 Part 9/ISO 10545-11
Impact Resistant as Coefficient of Restitution (COR)	0.55 Min	Test Method Available	0.55 Min	IS 13630 Part 14/ISO 10545-5
Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
Stain & Chemical Resistant (Glazed Tiles)				
Stain Resistant	Min Class 1	Min Class 3	Class 1	IS 13630 Part 8 & I SO 10545-14
Resistant to Household Chemicals	Min Class AA	Min B	Min Class AA	IS 13630 Part 8 / ISO 10545-13
Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if Agreed	Declared Value[f]	Min Class AA	

PACKAGING DETAIL FOR ELITA COLLECTION

Nominal Size (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
600x1200mm (Sinker)	8.2	27.2	2	1.44sq.mtr./15.5sq.ft.

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

TILE VISUALISER

SOMANY



Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at **www.somanyceramics.com** or call on **Toll Free: 1800 103 0004**

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome

Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com