SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

COVERSTONE / CATALOGUE / AUGUST 2025



UNIT 08 COVER15teen RANGE VOL 2 | AUG 2025

COVERSTONE

CONTEMPORARY SURFACES

800X2600mm
800X2400mm

SOMANY

BIG IN SIZE
BIGGER IN STYLE

Inspired by the soul of natural stone, Coverstone blends timeless elegance with modern versatility. Its large-format slabs unfold like sweeping canvases, expressive and brimming with possibilities, representing the pinnacle of creativity through cutting-edge design and exceptional scale. True to its essence, Coverstone features rich textures, vibrant colours, and exclusive designs that faithfully replicate nature's wonders. Guided by the ethos of 'Think Beyond', Coverstone becomes a canvas for unbounded expression — where nature's rhythm meets human imagination. More than just a surface, it's a smarter choice, a bold evolution in design and a new chapter in the future of surface innovation. From residential sanctuaries to commercial landmarks, Coverstone redefines possibility, offering the beauty of natural stone with the freedom to dream bigger, build bolder.

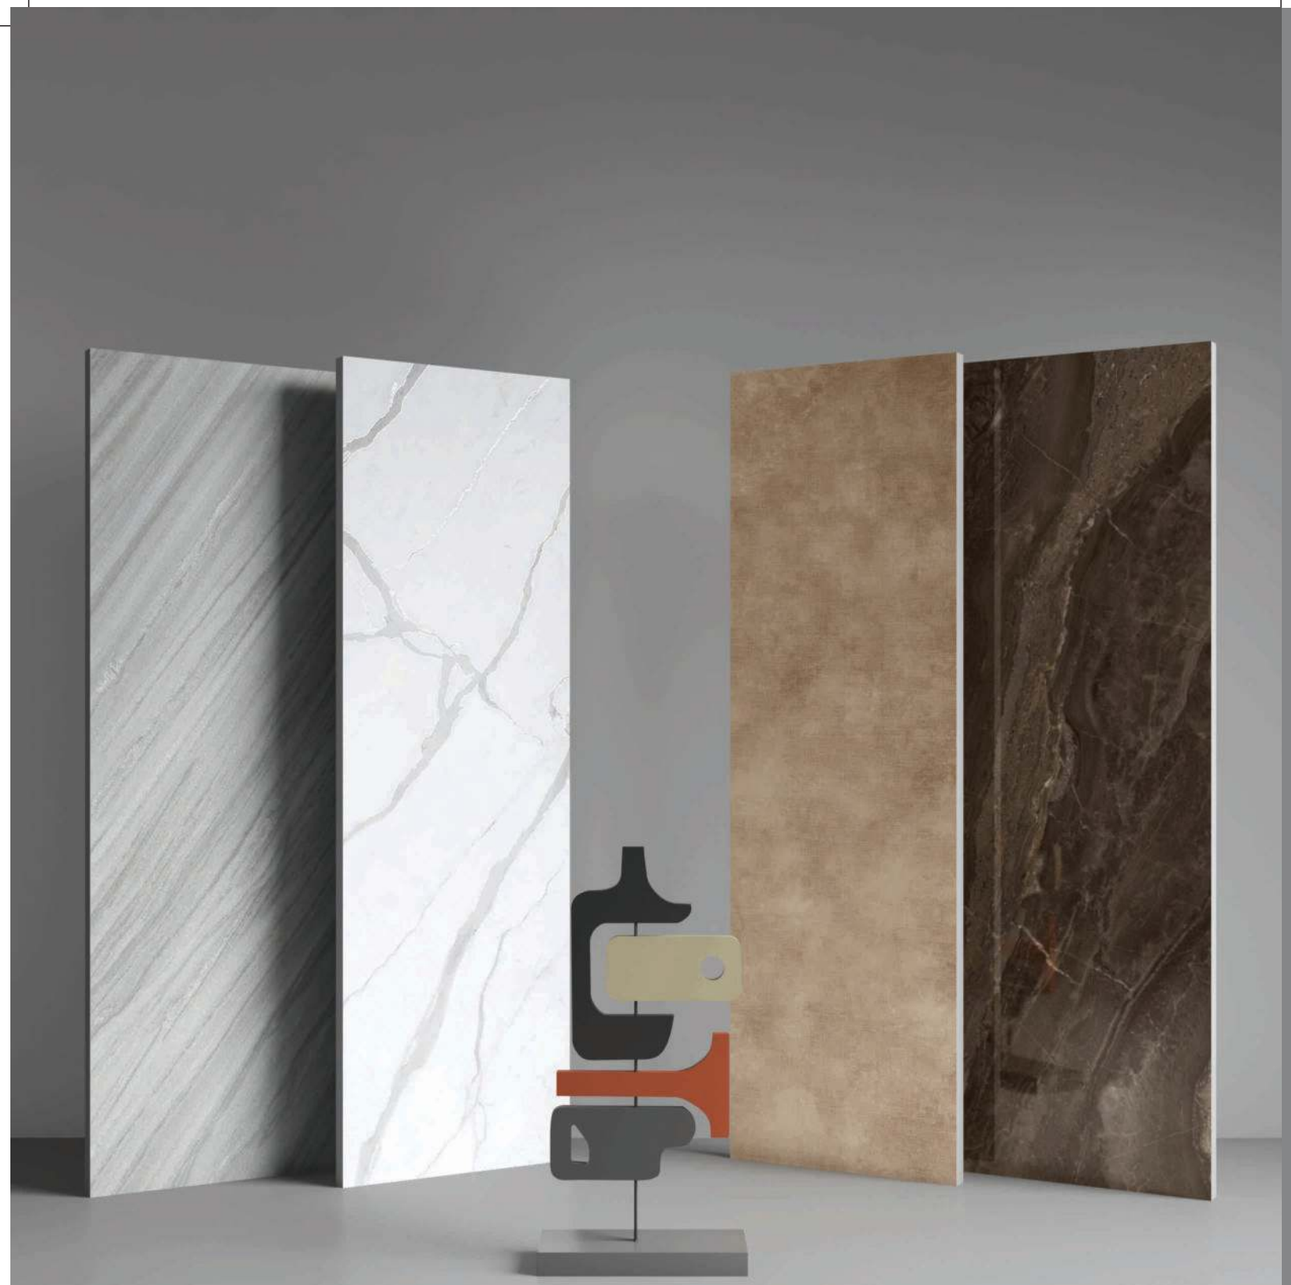

PRODUCT RANGE

TECHNICAL PORCELAIN	STELLA · LEIA · NEBULA · ALESSIA · LITH
CONTEMPORARY SURFACES	QUILLTOUCH · SHAPEtech · carvo
LUXURY POLISH	LUX COLLECTION

COVERSTONE

Video

The COVERSTONE range from SOMANY is powered by cutting-edge FCS technology. It offers a 15mm thickness in both full body and coloured body options, with slab sizes starting from 800x2400mm and beyond. With limitless possibilities, COVERSTONE enhances your spaces with luxurious surfaces. COVERSTONE is not only smooth and radiant but also easy to clean, hygienic, non-porous, scratch-resistant, fire-resistant, and impact-resistant. With its impressive qualities, COVERSTONE is sure to captivate and inspire, making it an ideal choice for elevating your living spaces—whether it's a worktop, kitchen top, walls, floors, or your bath space.

OUR TECHNOLOGY

FCS TECHNOLOGY
FRITTAGE COMPACT SLABS

Our (FCS) Frittage Compact slabs achieve outstanding surface and body properties through a meticulous process involving exposure of unique raw materials to high temperatures, reconfiguring the atomic structure for a dense, tough, and non-porous surface. Central to our operation is the CONTINUA+ integrated plant, utilizing continuous compaction techniques with unique sequencing processes on the conveyor belt. This innovative approach ensures consistent thickness, unparalleled density distribution, reducing porosity while enhancing the surface aesthetics with higher brightness, design clarity, increasing abrasion resistance while reducing energy consumption, and minimising carbon footprint.



FOSTERING HEALTH AND HYGIENE

In response to evolving lifestyles, prioritising health and hygiene in living spaces has become essential. Somany, with its advanced FCS Technology, ensures a cleaner environment by inhibiting the growth of harmful microorganisms on tile surfaces.

FEATURES

- HYGIENIC & SAFE FOR CONTACT WITH FOOD
- EASY TO CLEAN
- IMPACT RESISTANT
- STAIN RESISTANT
- FLATNESS & STABILITY OVER TIME
- SCRATCH PROOF & ABRASION RESISTANT
- BEND RESISTANT
- LOW WATER ABSORPTION
- EASY INSTALLATION
- FIRE RESISTANT
- FROST RESISTANT
- LONG DURABILITY
- HEAT RESISTANT
- CRAZING RESISTANT

WHAT MAKES COVERSTONE BETTER

PARAMETRES	COVERSTONE	NATURAL MARBLE, GRANITE, & STONES	ARTIFICIAL / ENGINEERED MARBLES	TILES (CONVENTIONAL)
Breaking Strength	> 8000 N	> 2000 N	> 4000 N	> 1500 N
Sizes & Thickness	Thickness 9-15mm Variation ± 3.0%	Thickness 12-25mm Variation ± 5-6%	Thickness 12-20 mm Variation ± 5-6%	Thickness 8-10 mm Variation ± 4.0%
Design Options	Limitless Design	Limited Options	Limited Options	Limited Options
Chemical Resistant	Resistant	Moderate Resistant	Moderate Resistant	Resistant
Porosity (Water Absorption)	Max 0.08%	0.5-1.0%	0.5-1.0%	Max 0.2%
Fading & Discolouration	No Fading	No Fading	Fades	No Fading
Installation Ease	Pre Size & Pre Polished	Unpolished, and variation in lots	Pre Polished	Pre Size & Pre Polished
Customisation In Size	Yes	No	No	No
Selection Process	Ease of selection sample is enough	Inconvenient, sample vs supplied materials can differ	Sample Required	Sample Required
Wastage Factor	Lower Wastage	Very High Wastage	Medium Wastage	Lower Wastage
Laying	Easy to Lay	Complicated, Sizing & Polishing is Compulsory at Site	Complicated, Sizing is Compulsory at Site	Easy to Lay
Aesthetic Properties	Aesthetic features with Feel of Natural materials with superior technical features	Defects like fractures/porosity/ pits and uneven colour are inevitable after some duration	Waviness may appear after some duration	Aesthetic features with superior technical features
Cost v/s Brightness	Low	High	High	Medium
Maintenance Cost	Very Low	Required	Low	Low

CATEGORY	SURFACE	Surface Abrasion (IS-13630:2019 Part-11)	Deep Abrasion (IS-13630:2019 Part-12)	Moh's Scale Hardness (IS-13630:2019 Part-13)	R Value (DIN 51130 :2004)	Stain Resistant (IS-13630:2019) (Part 7 UGL, Part-8 GL) #
GL	**Quilltouch (Light Shades)**	PEI IV	NA	5	9	Class 2 ★★★
GL	**Quilltouch (Dark Shades)**	PEI III	NA	5	9	Class 2 ★★★
GL	**Shapetech**	PEI V	NA	7	9	Class 1 ★★★★★
GL	**Carvo**	PEI IV	NA	6	9	Class 1 ★★★★★
	Marble/Granite/ Kota stone	NA	Granite < 140 mm^3 Marble > 200 mm^3	4	9	Class 1 ★
	Engineered Marble/ Quartz Slab	NA	> 140 mm^3	3	9	Class 1 ★

★ "A higher star rating indicates greater resistance to stains, as per IS 13630:2019."

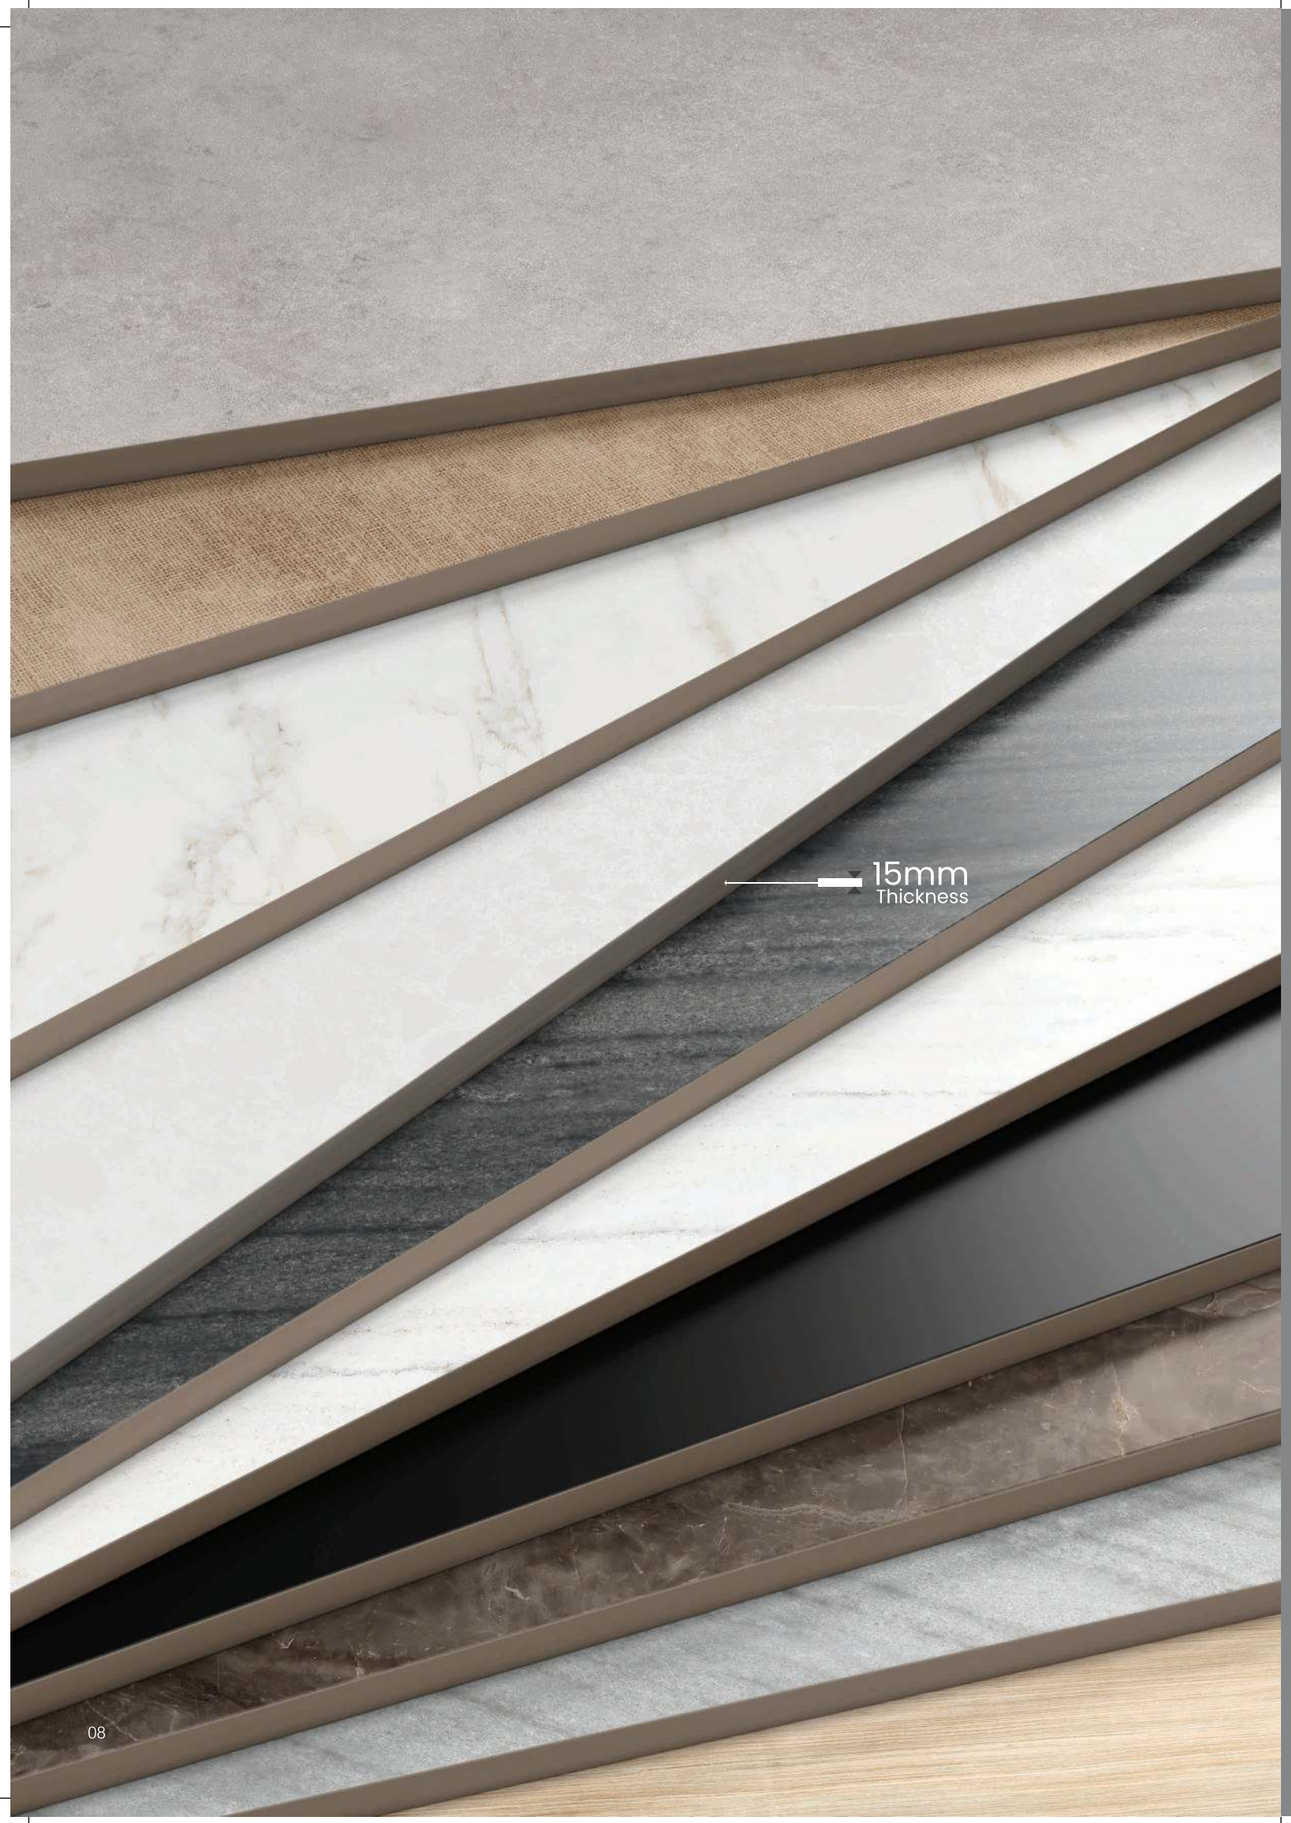

APPLICATION POSSIBILITIES

Somany Ceramics, a brand dedicated to delivering innovative solutions for architecture and interior design, offers a wide range of application possibilities. These versatile slabs can be used across diverse spaces — from homes and restaurants to hotels and commercial environments — offering immense potential in construction, furniture, and architectural design.

- WALL
- FLOOR
- COUNTER TOP
- BATH SPACE
- LIFT AREA
- RECEPTION
- LOBBY
- KITCHEN TOP
- TABLE TOP
- STAIRCASE
- WINDOW FRAMES
- POOL AREA

APPROACH AREAS

- RESIDENTIAL AREAS
- COMMERCIAL AREAS
- HOSPITALS
- SHOPS AND MALLS
- HOTELS AND RESTAURANTS
- SCHOOLS AND COLLEGES
- RELIGIOUS PLACES
- RAILWAY STATIONS
- PARKS AND OUTDOOR
- PUBLIC PLACES

EDGE PROFILE

COVERSTONE offers various edge profiles that are made possible. The different edge finishes give a stylish and modern appeal to these surfaces.

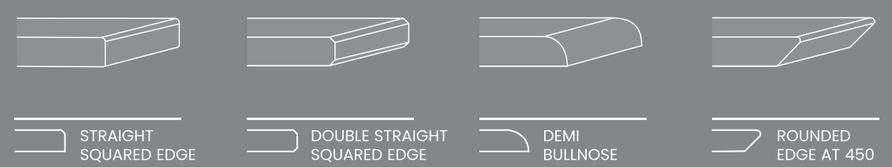

- STRAIGHT SQUARED EDGE
- DOUBLE STRAIGHT SQUARED EDGE
- DEMI BULLNOSE
- ROUNDED EDGE AT 450

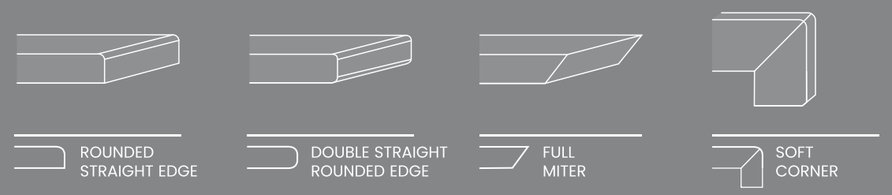

- ROUNDED STRAIGHT EDGE
- DOUBLE STRAIGHT ROUNDED EDGE
- FULL MITER
- SOFT CORNER

INDEX

COVERSTONE

QUILLTOUCH

12 to 47



PG - 14



PG - 15



PG - 20



PG - 21



PG - 26



PG - 26



PG - 27



PG - 32



PG - 33



PG - 38



PG - 39



PG - 44

SHAPETECH

48 to 73



PG - 50



PG - 51



PG - 56



PG - 57



PG - 62



PG - 63



PG - 68



PG - 69

CARVO

74 to 93



PG - 76



PG - 77



PG - 82



PG - 83



PG - 88



PG - 89

VIDEO

Ultra Matt Surfaces

800X2600mm

QUILLTOUCH surfaces offer a feather-like, velvety smoothness achieved through cutting-edge digital processes, resulting in a non-reflective finish. These surfaces present a vibrant range of colours with exceptional clarity, skillfully blending elements inspired by nature. The finish delivers deeper tones while maintaining transparency and intricate structural surface formations. It features a gloss level of less than 8, abrasion resistance rated at PEI 4, and superior slip resistance.

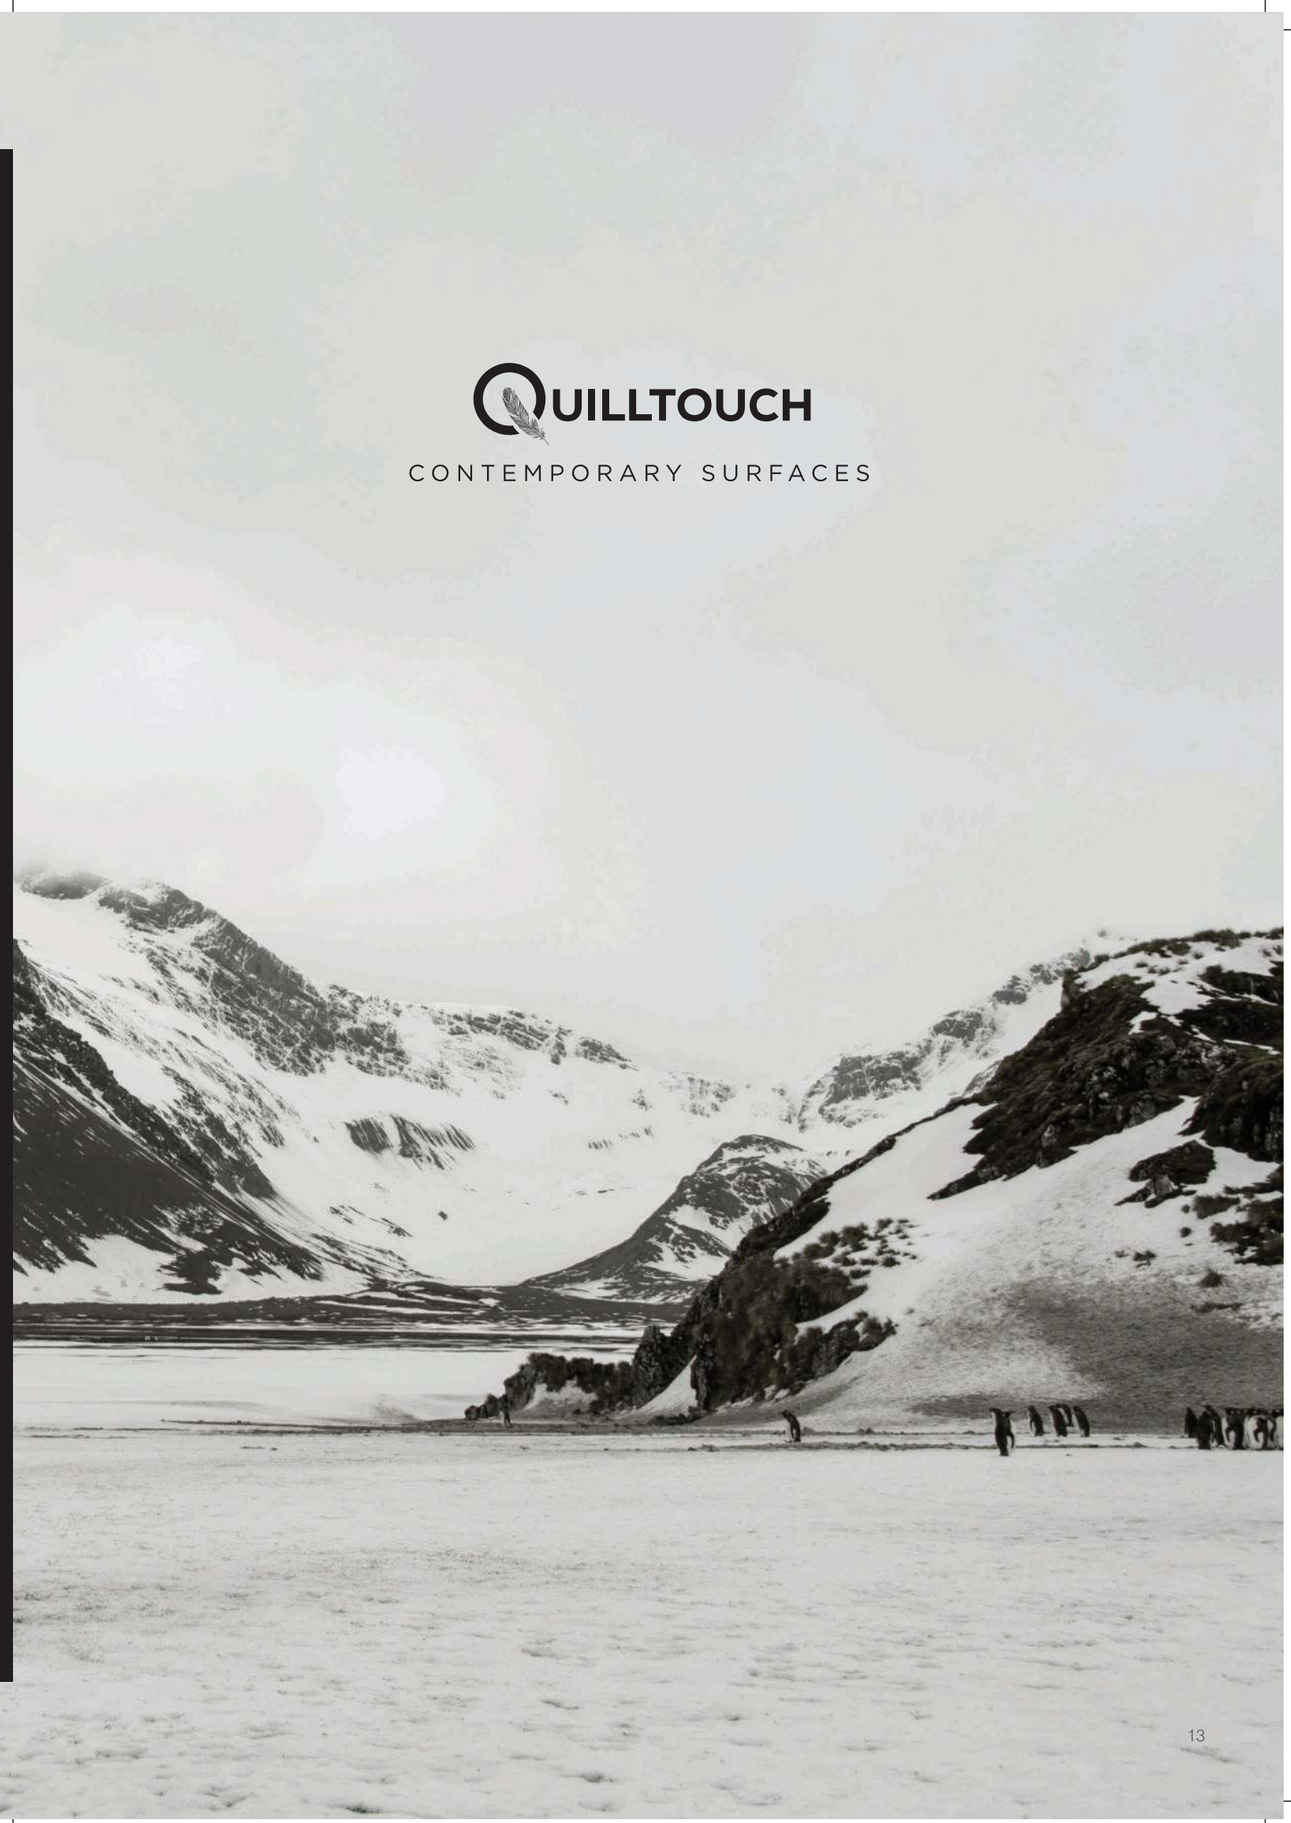

QUILLTOUCH

CONTEMPORARY SURFACES

ALASKA NATURAL



360 VIEW



LUX

ALASKA NATURAL 26 QUILL

Size: 800x2600mm
Finish: Quilltouch Matt
Thickness: 15mm
Degree of Variation: V2
Technology: FCS Technology

DESIGN NAME	SIZES	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
ALASKA NATURAL 26	800x2600mm	✓	✓		
15 ALASKA NATURAL 180	1200x1800mm	✓			

CARARA WHITE



360 VIEW



LUX

SHAPETECH

CARARA WHITE 26 QUILL

Size: 800x2600mm
Finish: Quilltouch Matt
Thickness: 15mm
Degree of Variation: V2
Technology: FCS Technology

DESIGN NAME	SIZES	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
CARARA WHITE 26	800x2600mm	✓	✓	✓	
15 CARARA WHITE 180	1200x1800mm	✓			



ALASKA NATURAL



WALL: ALASKA NATURAL 26 QUILL
FLOOR: WOODAK TEAK RIGA 26 SHAPE
KITCHEN COUNTER: ALASKA NATURAL 26 QUILL

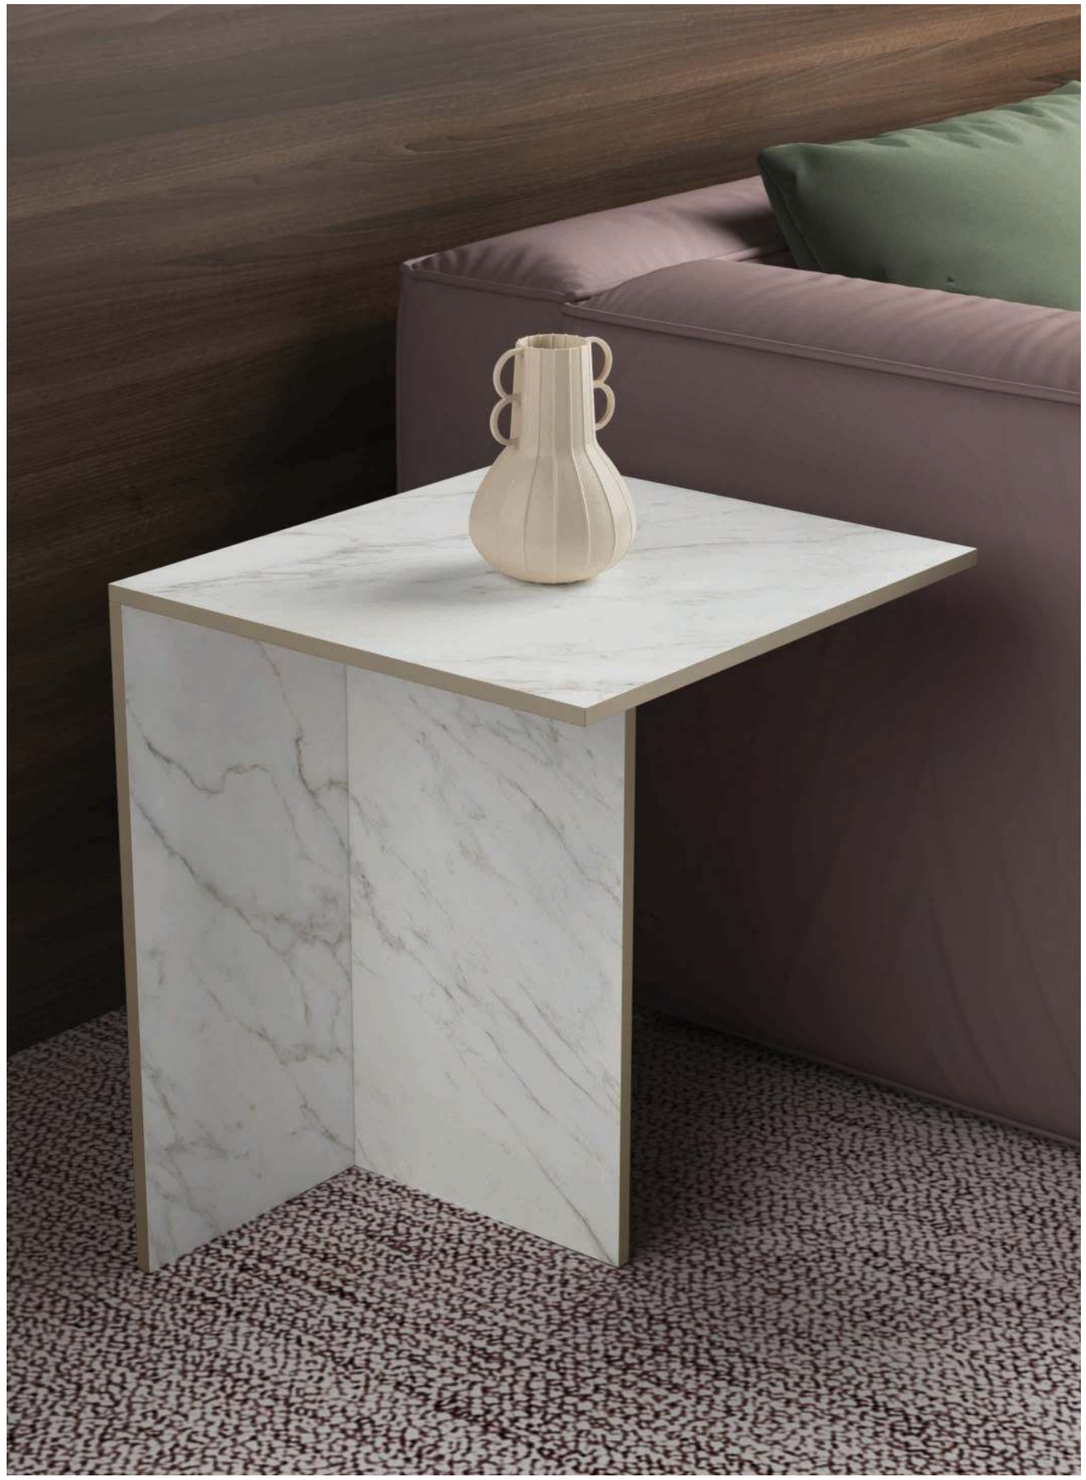

CARARA WHITE



WALL: **CARARA WHITE 26 QUILL**
FLOOR: **CARARA WHITE 26 QUILL**

HEMARUS WHITE

360 VIEW

HEMARUS WHITE 26 QUILL

Size: 800x2600mm
Finish: Quilltouch Matt
Thickness: 15mm
Degree of Variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
HEMARUS WHITE 26	800x2600mm		✓		

MARQUINA NERO



360 VIEW

MARQUINA NERO 26 QUILL

Size: 800x2600mm
Finish: Quilltouch Matt
Thickness: 15mm
Degree of Variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
MARQUINA NERO 26	800x2600mm		✓		





WALL: HEMARUS WHITE 26 QUILL
FLOOR: HEMARUS WHITE 26 QUILL

HEMARUS WHITE

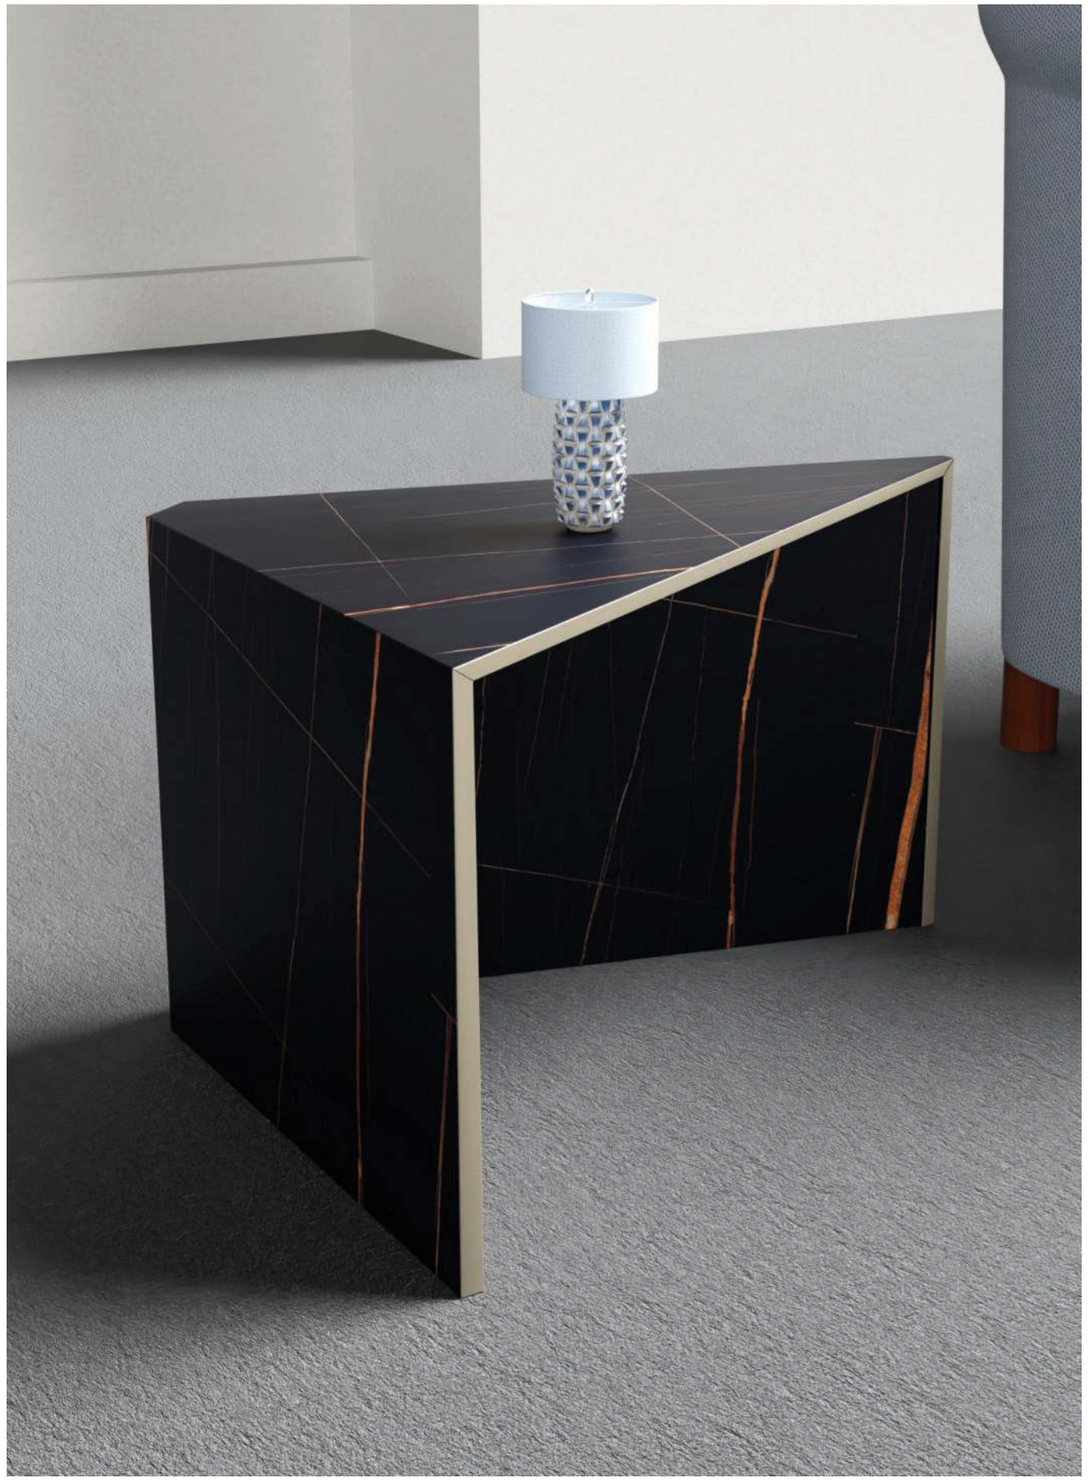

MARQUINA NERO



STAIRS: MARQUINA NERO 26 QUILL
FLOOR: CARARA WHITE 26 QUILL

NEVOSA NERO



360 VIEW

NEVOSA NERO 26 QUILL

Size: 800x2600mm
Finish: Quilltouch Matt
Thickness: 15mm
Degree of Variation: V2
Technology: FCS Technology

NEVOSA WHITE

360 VIEW

NEVOSA WHITE 26 QUILL

Size: 800x2600mm
Finish: Quilltouch Matt
Thickness: 15mm
Degree of Variation: V2
Technology: FCS Technology

NEVOSA GREY



360 VIEW

NEVOSA GREY 26 QUILL

Size: 800x2600mm
Finish: Quilltouch Matt
Thickness: 15mm
Degree of Variation: V2
Technology: FCS Technology

DESIGN NAME	SIZES	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
NEVOSA NERO 26 QUILL	800x2600mm		✓		
NEVOSA WHITE 26 QUILL	800x2600mm		✓		
NEVOSA GREY 26 QUILL	800x2600mm		✓		

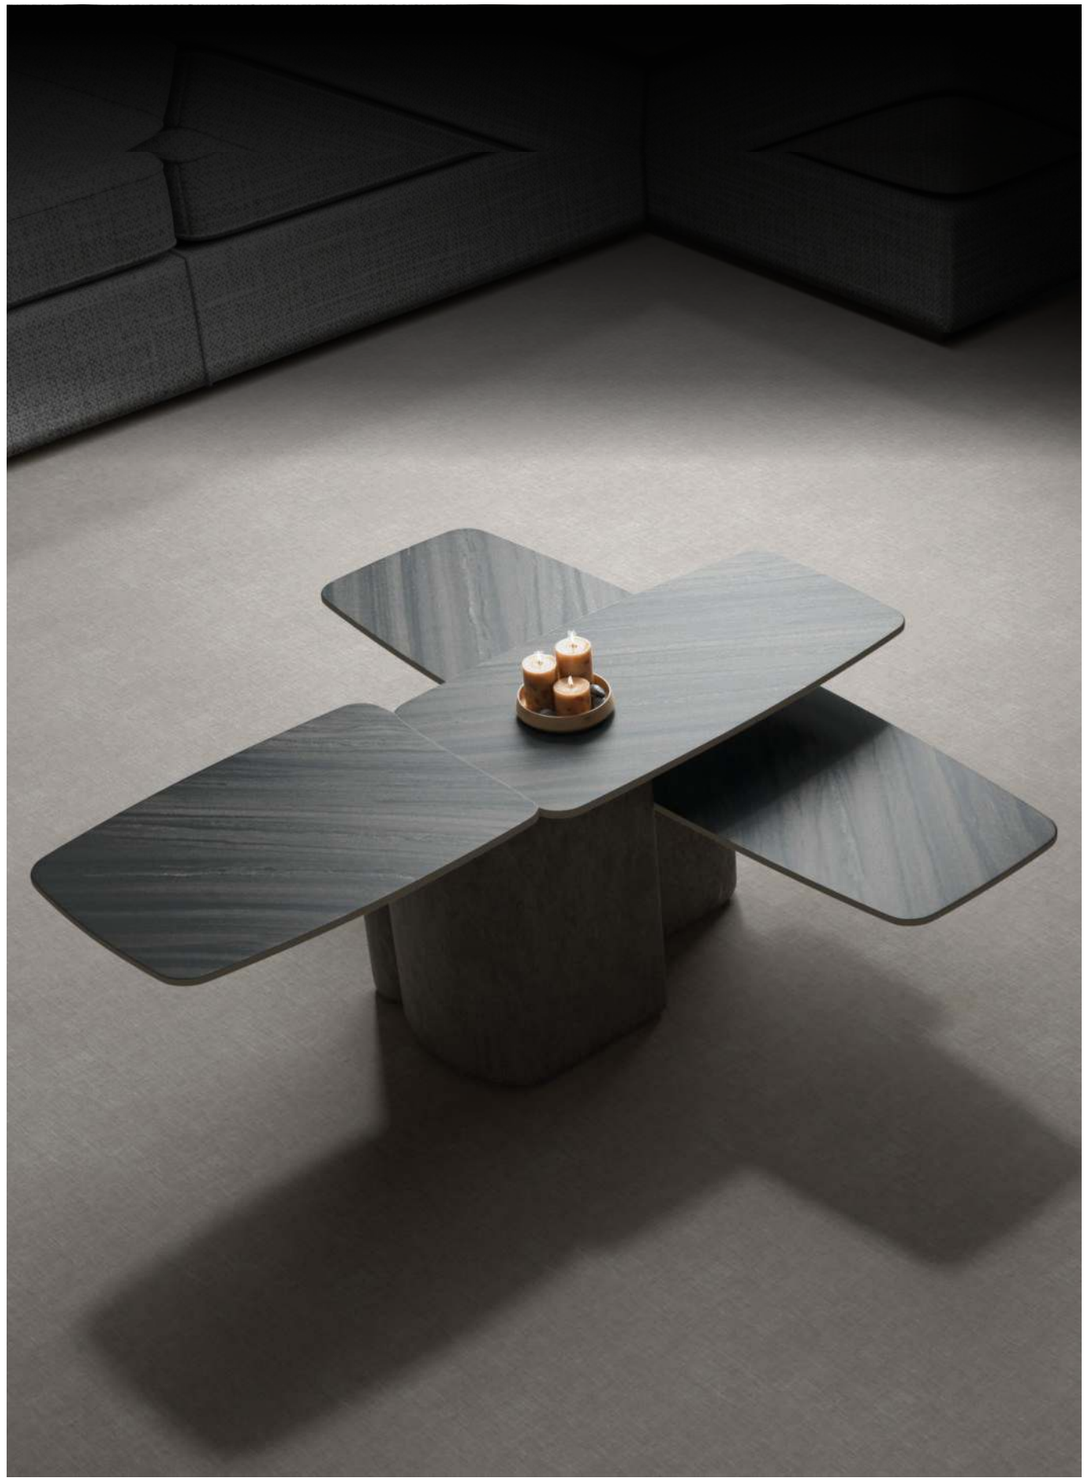

NEVOSA NERO



WALL: NEVOSA NERO 26 QUILL
NEVOSA WHITE 26 QUILL
FLOOR: NEVOSA WHITE 26 QUILL
KITCHEN COUNTER: NEVOSA NERO 26 QUILL



NEVOSA GREY

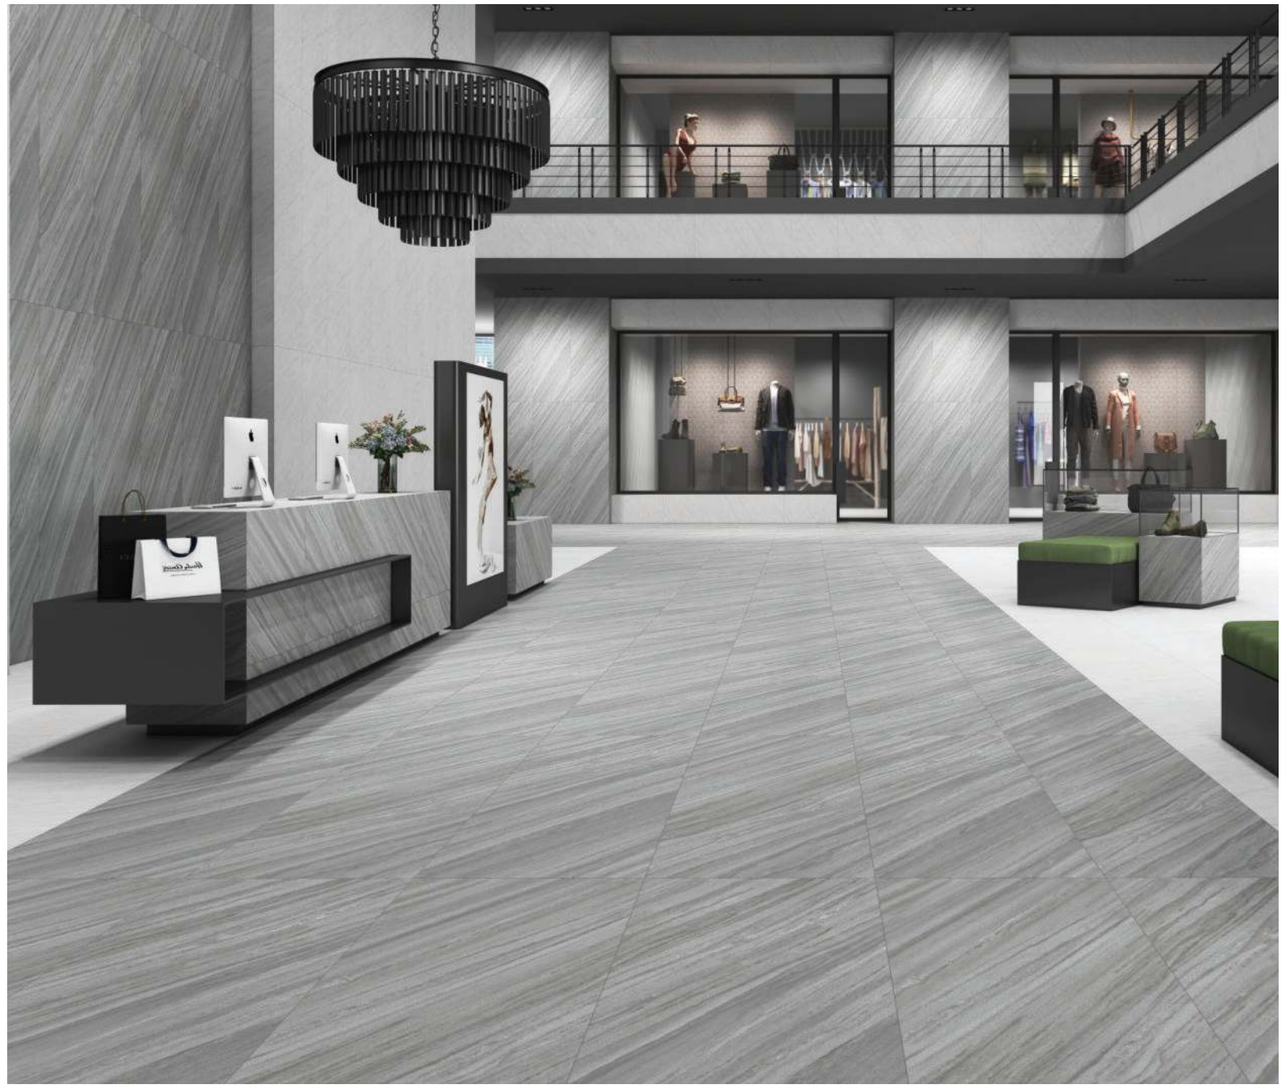

WALL: NEVOSA GREY 26 QUILL
FLOOR: NEVOSA GREY 26 QUILL
NEVOSA WHITE 26 QUILL
TABLE: NEVOSA GREY 26 QUILL

OROBICO BRUNO



360 VIEW



LUX

OROBICO BRUNO 26 QUILL

Size: 800x2600mm
Finish: Quilltouch Matt
Thickness: 15mm
Degree of Variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
OROBICO BRUNO 26	800x2600mm	✓	✓		

OSSIGENO NATURAL

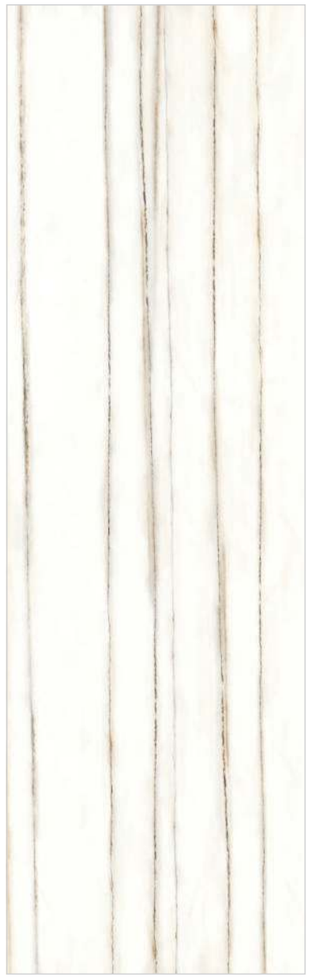

360 VIEW



LUX

OSSIGENO NATURAL 26 QUILL

Size: 800x2600mm
Finish: Quilltouch Matt
Thickness: 15mm
Degree of Variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
OSSIGENO NATURAL 26	800x2600mm	✓	✓		





FLOOR: **OROBICO BRUNO 26 QUILL**
KITCHEN COUNTER: **OROBICO BRUNO 26 QUILL**

OROBICO BRUNO





FLOOR: OSSIGENO NATURAL 26 QUILL
TABLE TOP: OSSIGENO NATURAL 26 QUILL

OSSIGENO NATURAL

PALISSANDRO BIANCO



360 VIEW

PALISSANDRO BIANCO 26 QUILL

Size: 800x2600mm
Finish: Quilltouch Matt
Thickness: 15mm
Degree of Variation: V3
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
PALISSANDRO BIANCO 26	800x2600mm		✓		

PALISSANDRO NERO



360 VIEW

PALISSANDRO NERO 26 QUILL

Size: 800x2600mm
Finish: Quilltouch Matt
Thickness: 15mm
Degree of Variation: V3
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
PALISSANDRO NERO 26	800x2600mm		✓		



PALISSANDRO BIANCO



WALL: **PALISSANDRO BIANCO 26 QUILL**
FLOOR: **PALISSANDRO BIANCO 26 QUILL**



PALISSANDRO NERO



WALL: PALISSANDRO NERO 26 QUILL
FLOOR: PALISSANDRO BIANCO 26 QUILL

QUILLTOUCH

PANDA SNOW





LUX



SHAPETECH

360 VIEW

PANDA SNOW 26 QUILL

Size: 800x2600mm
Finish: Quilltouch Matt
Thickness: 15mm
Degree of Variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
PANDA SNOW 26	800x2600mm	✓	✓	✓	

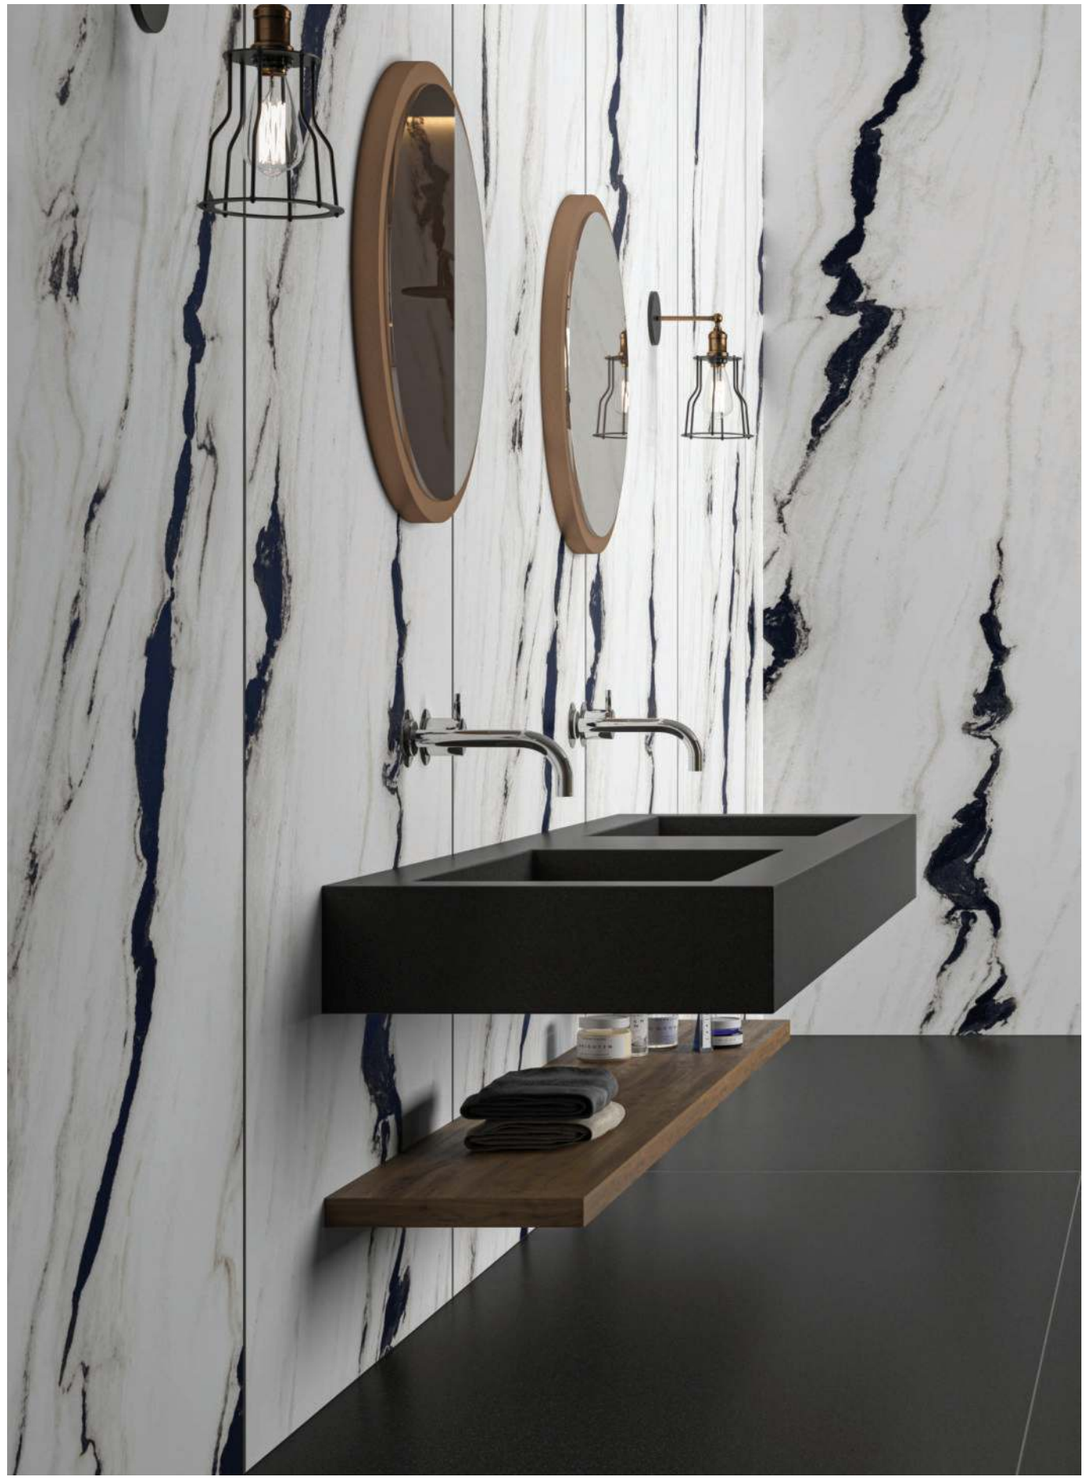

WALL: PANDA SNOW 26 QUILL
FLOOR: CRYSTALO BLACK 26 CARVO

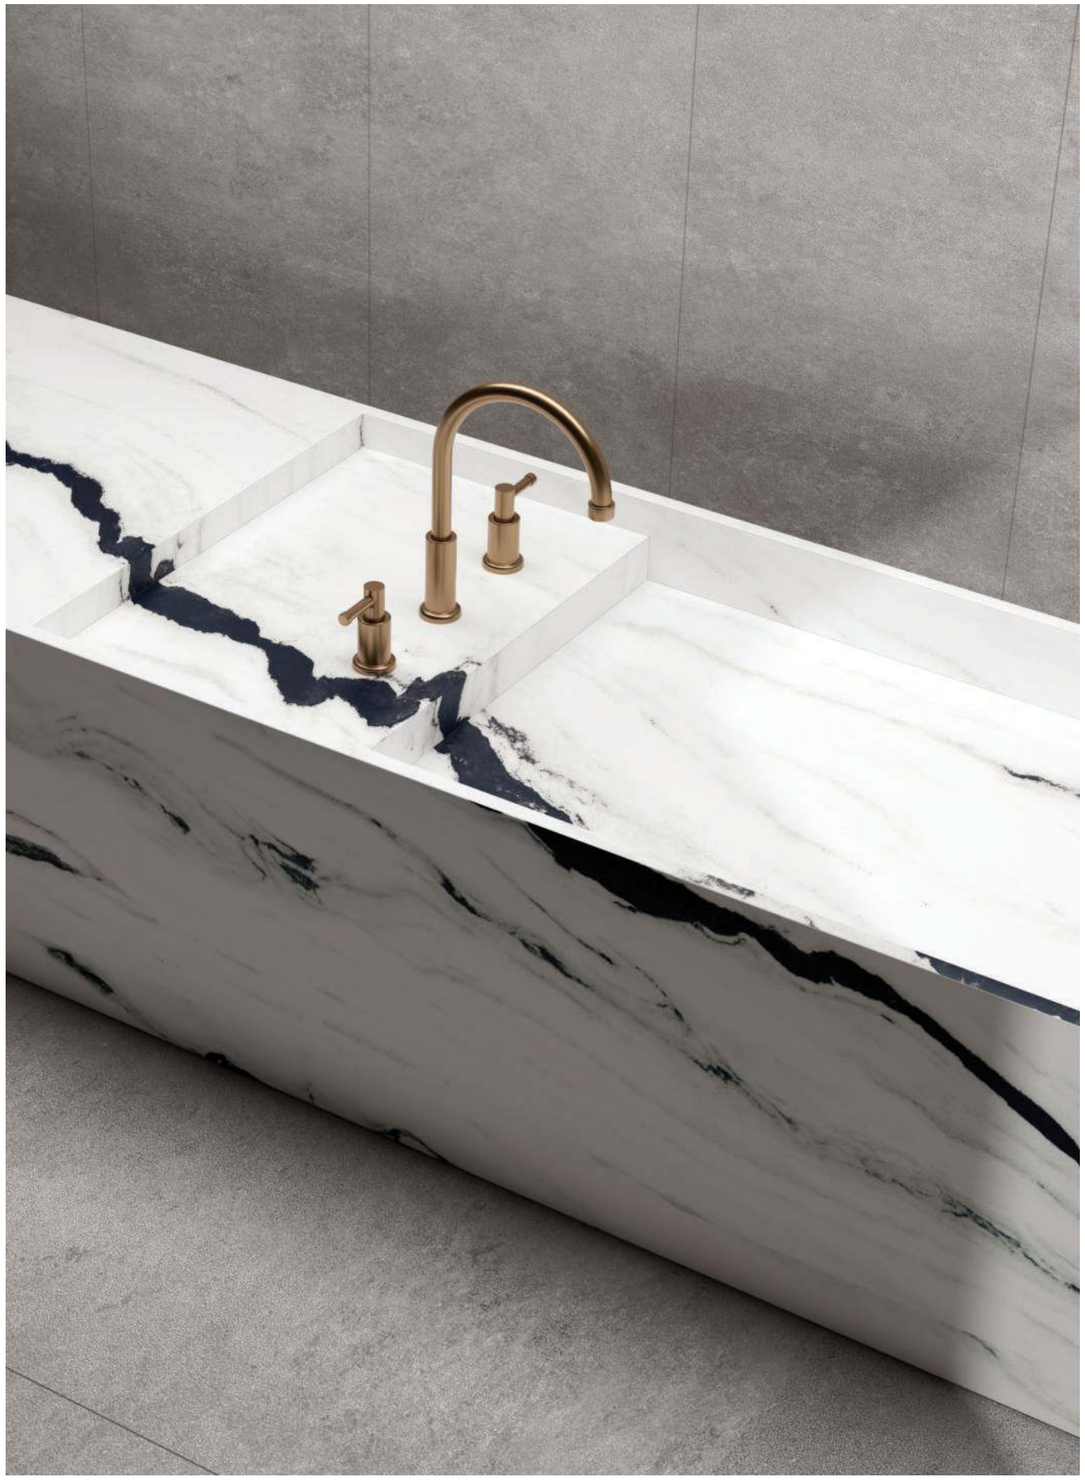

PANDA SNOW



WALL: PANDA SNOW 26 QUILL
FLOOR: CRYSTALO BLACK 26 CARVO

VIDEO

Design Structures Mirroring Nature's Original

800X2600mm

SHAPETECH seamlessly integrates shapes and elevations, creating punch-like surfaces in random phases that reflect the beauty of natural contours and imperfections in tile surfaces. This versatile canvas goes beyond stone, marble, concrete, and fabric, offering a unique opportunity to infuse depth and dimension into any space. The raised relief patterns mimic everything from the rugged textures of mountains to the delicate curves of wood, creating a sensory experience that connects our living spaces with the natural world.

PEI-V
ABRASION RESISTANT
FOR MODERATE TO HIGH TRAFFIC AREAS

MOH'S SCALE
HARDNESS > 6

SHAPEtech
CONTEMPORARY SURFACES

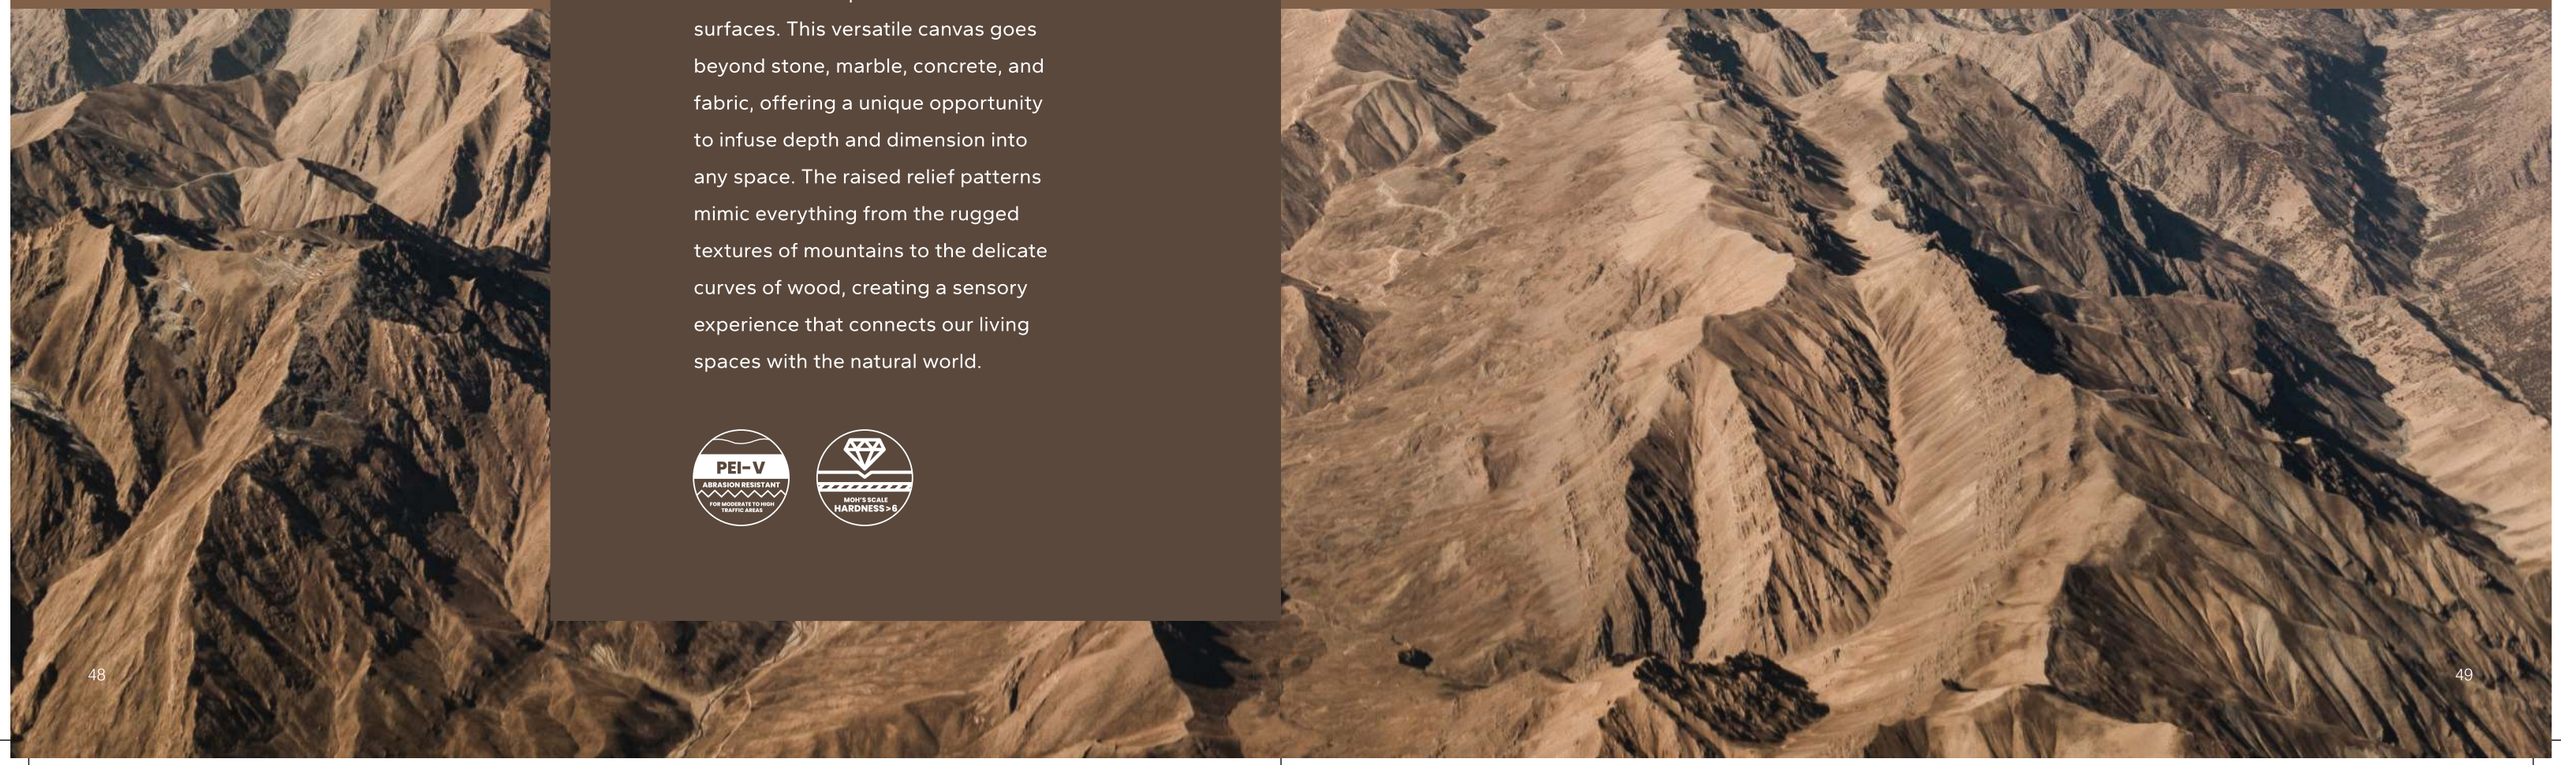

ATHENA GREY



360 VIEW

ATHENA GREY 26 SHAPE

Size: 800x2600mm
Finish: Structured Matt
Thickness: 15mm
Degree of variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
ATHENA GREY 26	800x2600mm			✓	

BRECCIA SARDA



360 VIEW



LUX

BRECCIA SARDA 26 SHAPE

Size: 800x2600mm
Finish: Structured Matt
Thickness: 15mm
Degree of variation: V1
Technology: FCS Technology

DESIGN NAME	SIZES	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
BRECCIA SARDA 26	800x2600mm	✓		✓	
15 BRECCIA SARDA 180	1200x1800mm	✓			





WALL: ATHENA GREY 26 SHAPE
FLOOR: ATHENA GREY 26 SHAPE
OFFICE TABLE: ATHENA GREY 26 SHAPE

ATHENA GREY





WALL: BRECCIA SARDA 26 SHAPE
FLOOR: CHESTER GREY 26 SHAPE
RECEPTION TABLE: BRECCIA SARDA 26 SHAPE
OROBICO BRUNO 26 QUILL

BRECCIA SARDA

CALACATTA CORCIA



360 VIEW

CALACATTA CORCIA 26 SHAPE

Size: 800x2600mm
Finish: Structured Matt
Thickness: 15mm
Degree of variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
CALACATTA CORCIA 26	800x2600mm			✓	

CARARA WHITE



360 VIEW

CARARA WHITE RIGA 26 SHAPE

Size: 800x2600mm
Finish: Structured Matt
Thickness: 15mm
Degree of variation: V2
Technology: FCS Technology

LUX

QUILL

DESIGN NAME	SIZES	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
CARARA WHITE 26	800x2600mm	✓	✓	✓	
15 CARARA WHITE 180	1200x1800mm	✓			





WALL: CALACATTA CORCIA 26 SHAPE
TABLE: CALACATTA CORCIA 26 SHAPE

CALACATTA CORCIA



CARARA WHITE

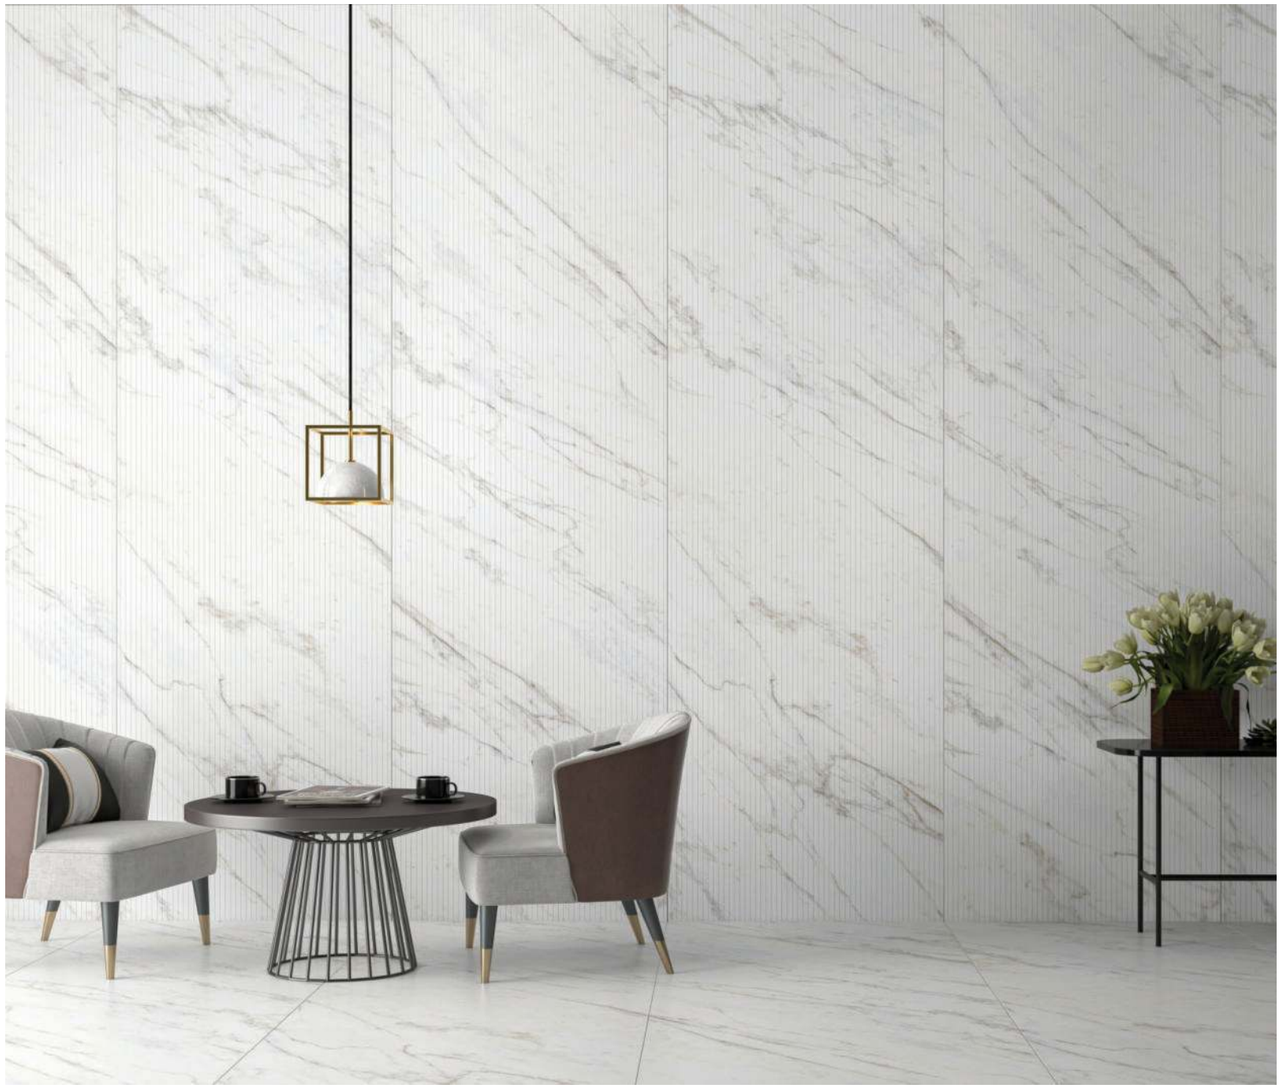

WALL: CARARA WHITE RIGA 26 SHAPE
FLOOR: CARARA WHITE 26 QUILL

CHESTER GREY



360 VIEW

CHESTER GREY 26 SHAPE

Size: 800x2600mm
Finish: Structured Matt
Thickness: 15mm
Degree of variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
CHESTER GREY 26	800x2600mm			✓	

FENNEL BEIGE



360 VIEW

FENNEL BEIGE 26 SHAPE

Size: 800x2600mm
Finish: Structured Matt
Thickness: 15mm
Degree of variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
FENNEL BEIGE 26	800x2600mm			✓	



CHESTER GREY



WALL: CHESTER GREY 26 SHAPE
FLOOR: CHESTER GREY 26 SHAPE
TABLE: WOODAK TEAK RIGA 26 SHAPE



FENNEL BEIGE



BAR AREA: FENNEL BEIGE 26 SHAPE
FLOOR: CHESTER GREY 26 SHAPE

PANDA SNOW



360 VIEW



LUX



QUILL

PANDA SNOW RIGA 26 SHAPE

Size: 800x2600mm
Finish: Structured Matt
Thickness: 15mm
Degree of variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
PANDA SNOW 26	800x2600mm	✓	✓	✓	

WOODAK TEAK



360 VIEW

WOODAK TEAK RIGA 26 SHAPE

Size: 800x2600mm
Finish: Structured Matt
Thickness: 15mm
Degree of variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
WOODAK TEAK 26	800x2600mm			✓	



PANDA SNOW



COUNTER TOP & BATHROOM: **PANDA SNOW RIGA 26 SHAPE**
FLOOR: **PALISSANDRO NERO 26 QUILL**

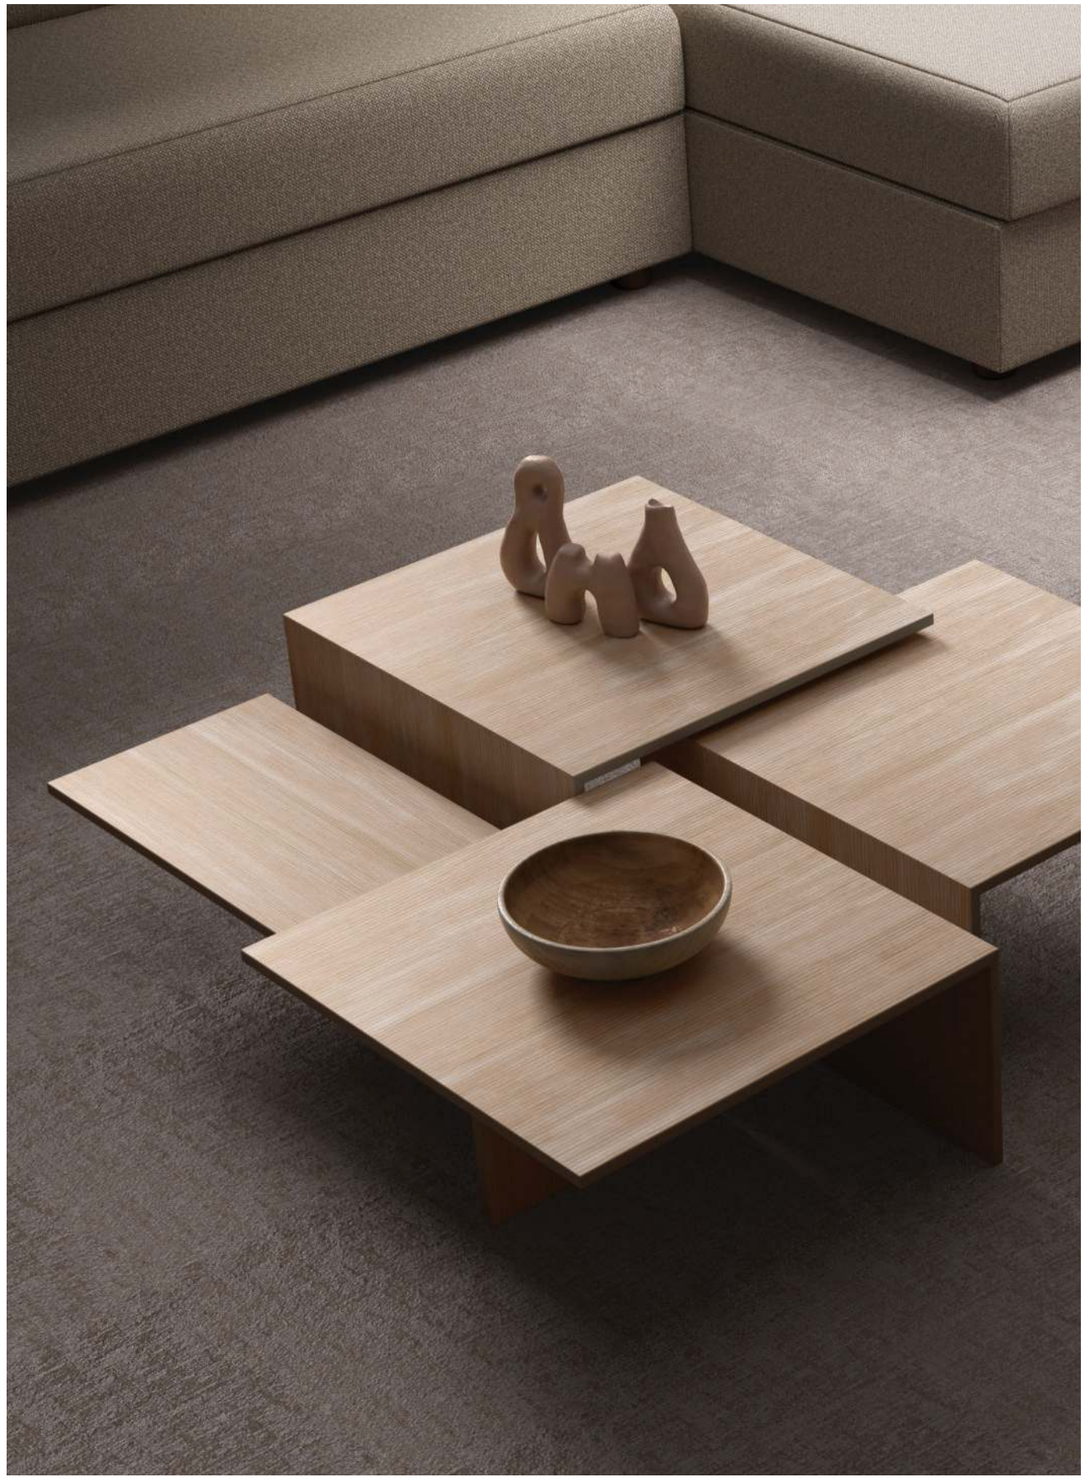



WALL: WOODAK TEAK RIGA 26 SHAPE
FLOOR: FENNEL BEIGE 26 SHAPE
TABLE: LEIA COCOA 26 POLISHED

WOODAK TEAK

VIDEO

Premium Carved Glossy Surface Structures

800X2600mm | 800X2400mm

Featuring a tranquil matt base accented by randomly placed, deep-carved veins with a glossy lustre, this surface exudes quiet sophistication. The intricate carvings mimic natural patterns — from delicate leaf veins and the flowing elegance of marble and stone, to the organic lines of tree bark. The carved dimension invites touch and interaction, capturing the essence of the natural world with remarkable precision.

PEI-IV
ABRASION RESISTANT
FOR MODERATE TO HIGH TRAFFIC AREAS

MOH'S SCALE
HARDNESS > 6

carvo
CONTEMPORARY SURFACES



ARGOS NERO



360 VIEW

ARGOS NERO 26 CARVO

Size: 800x2600mm
Finish: Matt Carving
Thickness: 15mm
Degree of variation: V1
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
ARGOS NERO 26	800x2600mm				✓

ARGOS WHITE

360 VIEW

ARGOS WHITE 26 CARVO

Size: 800x2600mm
Finish: Matt Carving
Thickness: 15mm
Degree of variation: V1
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
ARGOS WHITE 26	800x2600mm				✓



ARGOS NERO



KITCHEN TABLE: **ARGOS NERO 26 CARVO**
FLOOR & TABLE: **ARGOS WHITE 26 CARVO**



ARGOS WHITE



WALL: ARGOS WHITE 26 CARVO
FLOOR: ARGOS WHITE 26 CARVO

CRYSTALO BLACK



360 VIEW

CRYSTALO BLACK 26 CARVO

Size: 800x2600mm
Finish: Matt Carving
Thickness: 15mm
Degree of variation: V1
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
CRYSTALO BLACK 26	800x2600mm				✓

CRYSTALO WHITE

360 VIEW

CRYSTALO WHITE 26 CARVO

Size: 800x2600mm
Finish: Matt Carving
Thickness: 15mm
Degree of variation: V1
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
CRYSTALO WHITE 26	800x2600mm				✓



CRYSTALO BLACK



TABLE: CRYSTALO BLACK 26 CARVO
FLOOR: NEVOSA GREY 26 QUILL

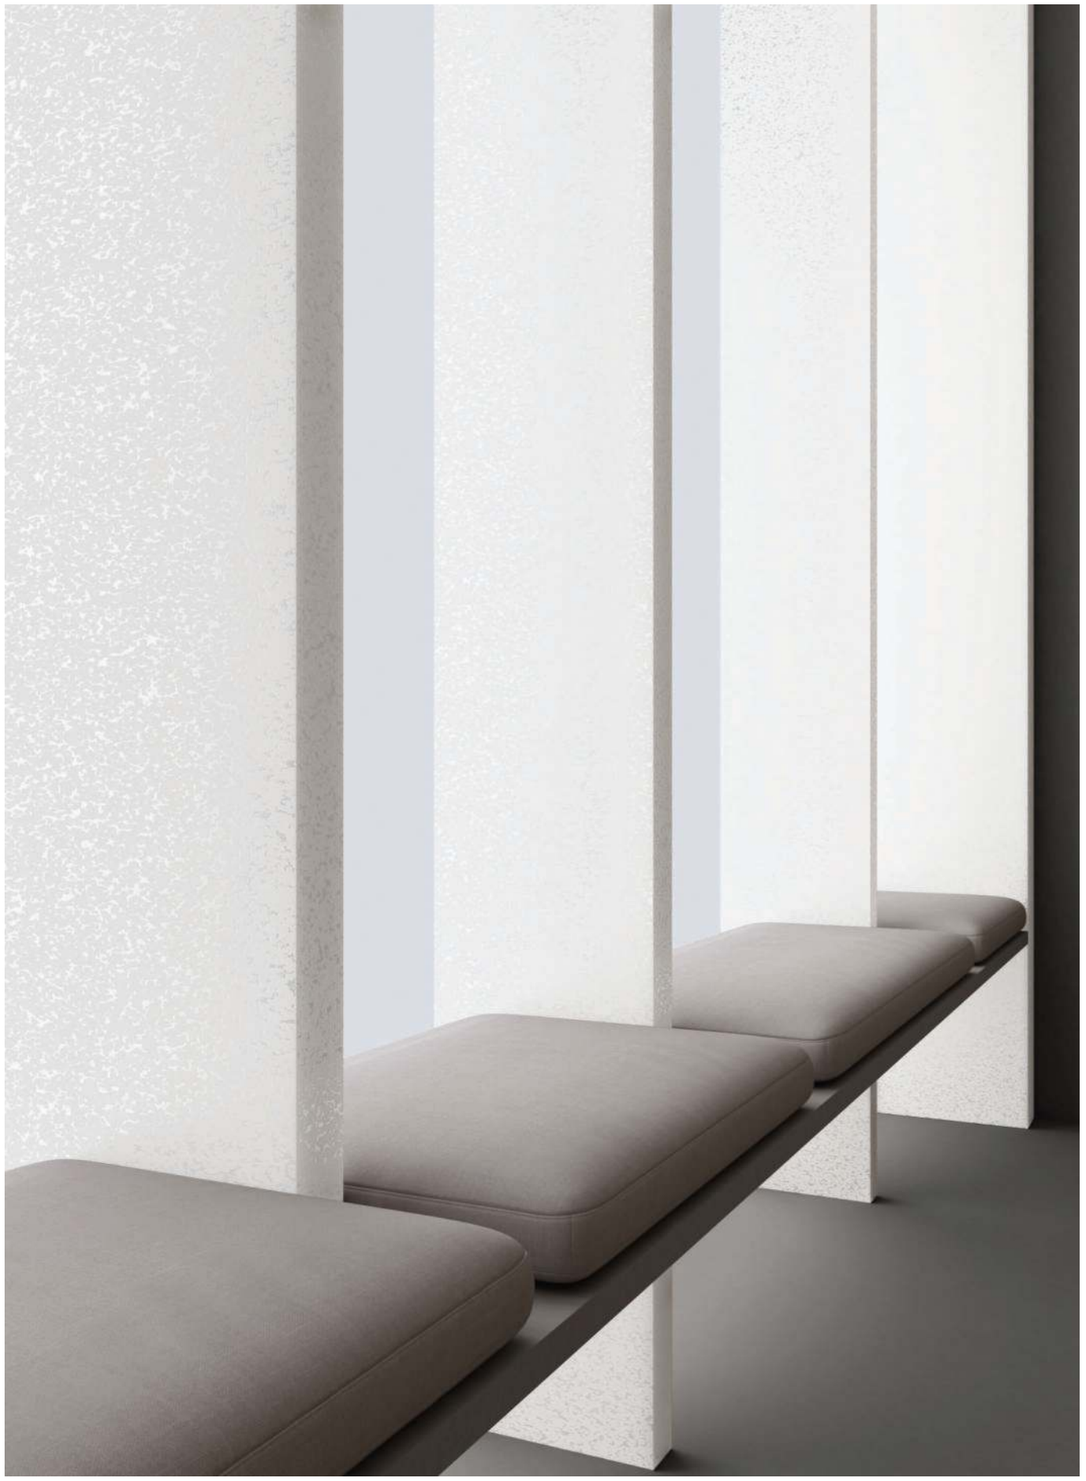

CRYSTALO WHITE



WALL: **CRYSTALO WHITE 26 CARVO**
FLOOR: **CRYSTALO WHITE 26 CARVO**
COUNTER TOP: **CRYSTALO WHITE 26 CARVO**

ARBASCATO WHITE



360 VIEW

ARBASCATO WHITE 24 CARVO

Size: 800x2400mm
Finish: Matt Carving
Thickness: 15mm
Degree of variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
ARBASCATO WHITE 24	800x2400mm				✓

VOLACAS BIANCO

360 VIEW

VOLACAS BIANCO 24 CARVO

Size: 800x2400mm
Finish: Matt Carving
Thickness: 15mm
Degree of variation: V2
Technology: FCS Technology

DESIGN NAME	SIZE	LUX(POLISHED)	QUILLTOUCH	SHAPETECH	CARVO
VOLACAS BIANCO 24	800x2400mm				✓





TABLE: ARBASCATO WHITE 24 CARVO
FLOOR & WALL: ARBASCATO WHITE 24 CARVO

ARBASCATO WHITE



VOLACAS BIANCO



WALL: **VOLACAS BIANCO 24 CARVO**
FLOOR: **VOLACAS BIANCO 24 CARVO**
KITCHEN COUNTER: **VOLACAS BIANCO 24 CARVO**



TRANSPORTATION, HANDLING & STORAGE:

To ensure minimal or no storage hassles afterwards, make sure to secure the slabs properly during transportation. If the distance is shorter, keep them in a vertical position supported by a packing material to avoid rubbing or breakage. If the distance is more, ensure to place them on an A-shaped frame to avoid breakage or abrasion in transit.

Scan for Laying Instruction Video

MANUAL HANDLING:

Using the regular suction cup shown here, workers can shift the slabs without much hassle.
Also, if the slab has a textured surface, it is advisable to use large large-format slab Carrier System as shown here to lift it manually while securing it with suction cups from the four sides. This ensures easy manual handling without any damage or breakage while moving or shifting the slabs.

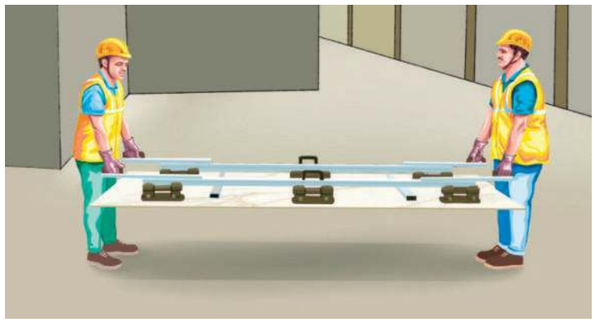





LAYING AND FIXING:

1. These slabs are heavy, large-sized slabs with sharp edges; thus, it is imperative for people handling them to wear protective gear while handling or during transportation. For the safety of the operator, it is advisable to use double or triple suction cups. Ensure a tight grip of the slab and also clean it thoroughly before transportation.

2. While laying the slabs, please check to
-Prepare the subfloor or the laying surface before placing the slab. It should be rigid, non-flexible, and strong enough to support the load of the slabs.
-Provide proper curing for the subfloor for at least 24 to 48 hours before slab work.

3. Use appropriate cement-based, fibre-reinforced, or ready-mixed adhesive to ensure proper fixing.

4. Using a 10x10 square notch trowel, spread the adhesive evenly, and 5cm to 10cm more than the size of the slab. To ensure no bubble of air pockets, apply the adhesive in stripes in parallel motion with the short edge.

5. Owing to the large size of slabs, a layer of adhesive should be applied at the back of the slabs using a trowel as shown here and should be fixed on a handing frame using a suction cup in a vertical position.

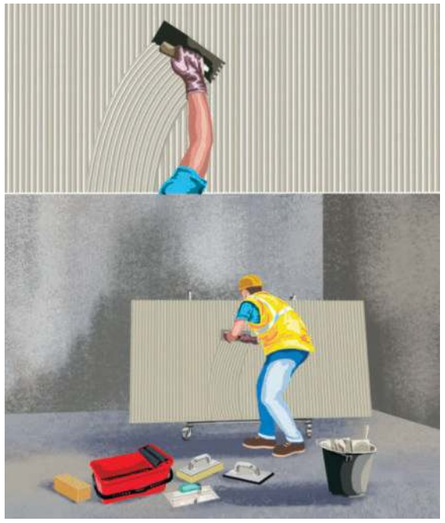

SLAB CUTTING:

Using a pencil, mark the portion to be cut from both sides. Place the cutting guide with the cutting carriage in a way that it correspondence with the markings on the slab. Lock the cutting and, with the suction cups, guide the cutting carriage. Watch your pressure and movement on the cutting carriage as it has to be constant to ensure correct scoring.

Score one end of the slab by 15mm while moving the cutting carriage towards the edge of the slab. Do the same on the opposite side.

6. A 10x10mm square notch trowel should be used for applying adhesive on the laying surface, while a 5x5mm trowel should be used to apply adhesive at the back.

7. The vertically erected slabs on the handling frame should then be lowered horizontally and carefully and firmly pressed into adhesive using a surface vibrator or a rubber mallet.

8. Use a levelling system for a lippage-free and evenly smooth surface.

9. To fix the slab nearer to each other or to shift the slab slightly up and down while fixing, you can use a closer system.

10. To ensure full contact between the adhesive and slab surface, check the backside of the slabs regularly. The hollow sound means it needs to be re-fixed with extra adhesive to smooth that particular area.

11. After the slab work, cover that area protection sheet till all the civil work is completed, and then take up grouting work last.

TOOLS IDEAL FOR MAX:



NOTCH TROWEL



LEVELLING SYSTEM WITH PLIER



TILE / SLAB LIFTER



SUCTION CUPS



TILES / SLAB CLOSER SYSTEM



SURFACE VIBRATOR

CLEANING:

After laying the slab, ensure proper cleaning to remove any residual grouting or dirt accumulation. You can use a cementitious de-scaler as it is mildly acidic and does not emit chemical fumes. In case of epoxy or resinous grouting, use the recommended detergent or slab cleaner.

Maintenance:

For normal cleaning, natural detergent with high cleaning powder is an ideal solution. In cases of rigid dirt accumulation over the period, you can use either of the below to clean it:

Dirt Type	Product
Cement, Metal Tracer, Rust	Cementitious Descaler
Residuals, Stains and halos of Epoxy	Epoxy Descaler
Grace, Tyre Marks, Colors, Markers	Non-Soap Degrease
Graffitis	Acetone and anti-graffitis

-After the grouting and removal of excess grouting, do not clean before ensuring complete drying of the slab surface, which is generally 5 days.

-Newly laid surface should not come in contact with any water or moisture as adhesive and grouting materials are maturing and hardening at this time. This is quite important outdoors, where there is a risk of freezing.

-Also protect your slab surface against mechanical or chemical hazards posed due to other kinds of civil works or installations. Ideally, it should be covered with thick cardboard or similar material.

-The final cleaning of the surface should be done with products having chemical resistance against tiles. Abrasive products or products with hydrofluoric acid should be avoided as they alter the glaze property of the slab and pose an irreversible risk to slab.

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.

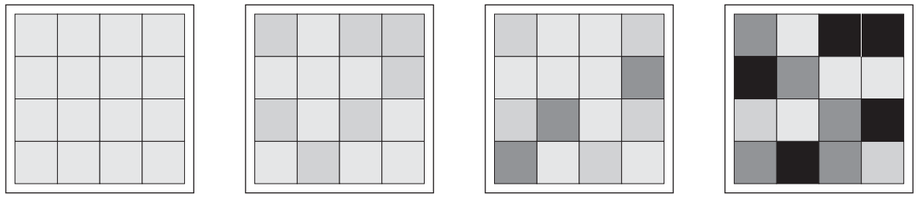

V1 Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation V3 Moderate Variation V4 Substantial Variation

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR CONTEMPORARY SURFACES				
Nominal Sizes	Thickness (mm)	Average Weight Per Carton (Kgs)	No. of Slab Per Carton	Coverage Area Per Carton
800X2400mm	15.0	67.00	1	1.92sq.mtr. / 20.66sq.ft.
800X2600mm	15.0	72.50	1	2.08sq.mtr. / 22.39sq.ft.

TECHNICAL SPECIFICATION FOR CONTEMPORARY SURFACES				
Characteristics	Requirement as Per IS 15622 : 2017 E ≤ 0.08 Group B I a	Requirement as Per ISO 13006 : 2018 ≤ 0.5% Group B I a	Our Values	Test Method
A) Dimension & Surface Quality				
I) Length & Width	± 0.1%	± 0.3%	± 0.1%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.00%	± 5.00%	± 3.0%	
iii) Straightness of Side	± 0.1%	± 0.3%	± 0.1%	
iv) Rectangularity	± 0.1%	± 0.3%	± 0.1%	
v) Surface Flatness				
a) Center Curvature (%) (Max. Deviation)	± 0.5%	± 0.4%	± 0.2%	
b) Edge Curvature (%) (Max. Deviation)	± 0.5%	± 0.4%	± 0.2%	
c) Corner Warpage (%) (Max. Deviation)	± 0.5%	± 0.4%	± 0.2%	
vi) Surface Quality	Min. 95% of Surface will be free from Visible Defects	Min. 95% of Surface will be free from Visible Defects	Min. 95% of Surface will be free from Visible Defects	
B) Physical Properties				
I) Water Absorption	Average ≤ 0.08%, Individual Max. 0.1%	Av ≤ 0.5%, Individual 0.6% Max	Average≤ 0.08%	IS 13630 Part 2/ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Avr 35, Individual 32 Min	Avr 35, Individual 32 min	Avr > 35	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1300 N	1300 N	> 8000 N	
iv) Moisture Expansion in mm/m	0.02	Test method available	0.02	IS 13630 Part 3/ISO 10545-10
v) Scratch Hardness of Surface (Mohs)	Min 5	N.A	Min 5-Quill, Shape-7, Carvo-6,Gema-2	IS 13630 Part 13
vi) Resistant to Abrasion of Glazed Tiles (Class I to V)	Min II	Abrasion Class & Cycle Passed	Class-V Shape, Class-IV Carvo, Class-III Quill, Class_II Gema	IS 13630 Part 11/ISO 10545-7
vii) Coefficient of Linear Thermal Expansion From Ambient Temperature to 100° C	6 X 10^{-6} K^{-1} Max	Test Method Available	Max 6 X 10^{-6} K^{-1} Max	IS 13630 Part 4/ISO 10545-8
viii) Thermal Resistant	10 Cycle Min	Test Method Available	10 Cycle Passed	IS 13630 Part 5/ISO 10545-9
ix) Crazing Resistant	4 Cycle @ 7.5 bar Min	Required	4 Cycle Passed	IS 13630 Part 9/ISO 10545-11
x) Impact Resistant Coefficient of Restitution (COR)	0.55 Min	Test Method Available	0.55 Min	IS 13630 Part 14/ISO 10545-5
xi) Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistant (Glazed Tiles)				
I) Stain Resistant	Min Class 1	Min Class 3	Min Class-1 (For Shape, Carvo), Min Class-2 (Quill, Gema)	IS 13630 Part 8/ISO 10545-14
ii) Resistant to Household Chemicals	Min Class AA	Min Class B	Min Class AA	IS 13630 Part 8/ISO 10545-13
iii) Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if Agreed	Declared Value[f]	Min Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The “Technical Specification” applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don’t accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

SIZES & SURFACES

DESIGN NAME	QUILLTOUCH	SHAPEtech	carvo	LUX LUXURY POLISH	
ALASKA NATURAL	800X2600mm	--	--	800X2600mm 1200X1800mm	
CARARA WHITE	800X2600mm	800X2600mm	--	800X2600mm 1200X1800mm	
HEMARUS WHITE	800X2600mm	--	--	--	
MARQUINA NERO	800X2600mm	--	--	--	
NEVOSA GREY	800X2600mm	--	--	--	
NEVOSA NERO	800X2600mm	--	--	--	
NEVOSA WHITE	800X2600mm	--	--	--	
OROBICO BRUNO	800X2600mm	--	--	800X2600mm	3
OSSIGENO NATURAL	800X2600mm	--	--	800X2600mm	4
PALISSANDRO BIANCO	800X2600mm	--	--	--	
PALISSANDRO NERO	800X2600mm	--	--	--	
PANDA SNOW	800X2600mm	800X2600mm	--	800X2600mm	
ATHENA GREY	--	800X2600mm	--	--	7
BRECCIA SARDA	--	800X2600mm	--	800X2600mm 1200X1800mm	8
CALACATTA CORCIA	--	800X2600mm	--	--	9
CHESTER GREY	--	800X2600mm	--	--	1
FENNEL BEIGE	--	800X2600mm	--	--	5
WOODAK TEAK RIGA	--	800X2600mm	--	--	2
ARGOS NERO	--	--	800X2600mm	--	
ARGOS WHITE	--	--	800X2600mm	--	
CRYSTALO BLACK	--	--	800X2600mm	--	
CRYSTALO WHITE	--	--	800X2600mm	--	
ARBASCATO WHITE	--	--	800X2400mm	--	
VOLACAS BIANCO	--	--	800X2400mm	--	

TILE VISUALISER

SOMANY



Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at **www.somanyceramics.com** or call on **Toll Free: 1800 103 0004**

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome

Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com