


RANGE VOL 2 | AUG 2025

COVER9ine

UNIT UNIT  
06 08

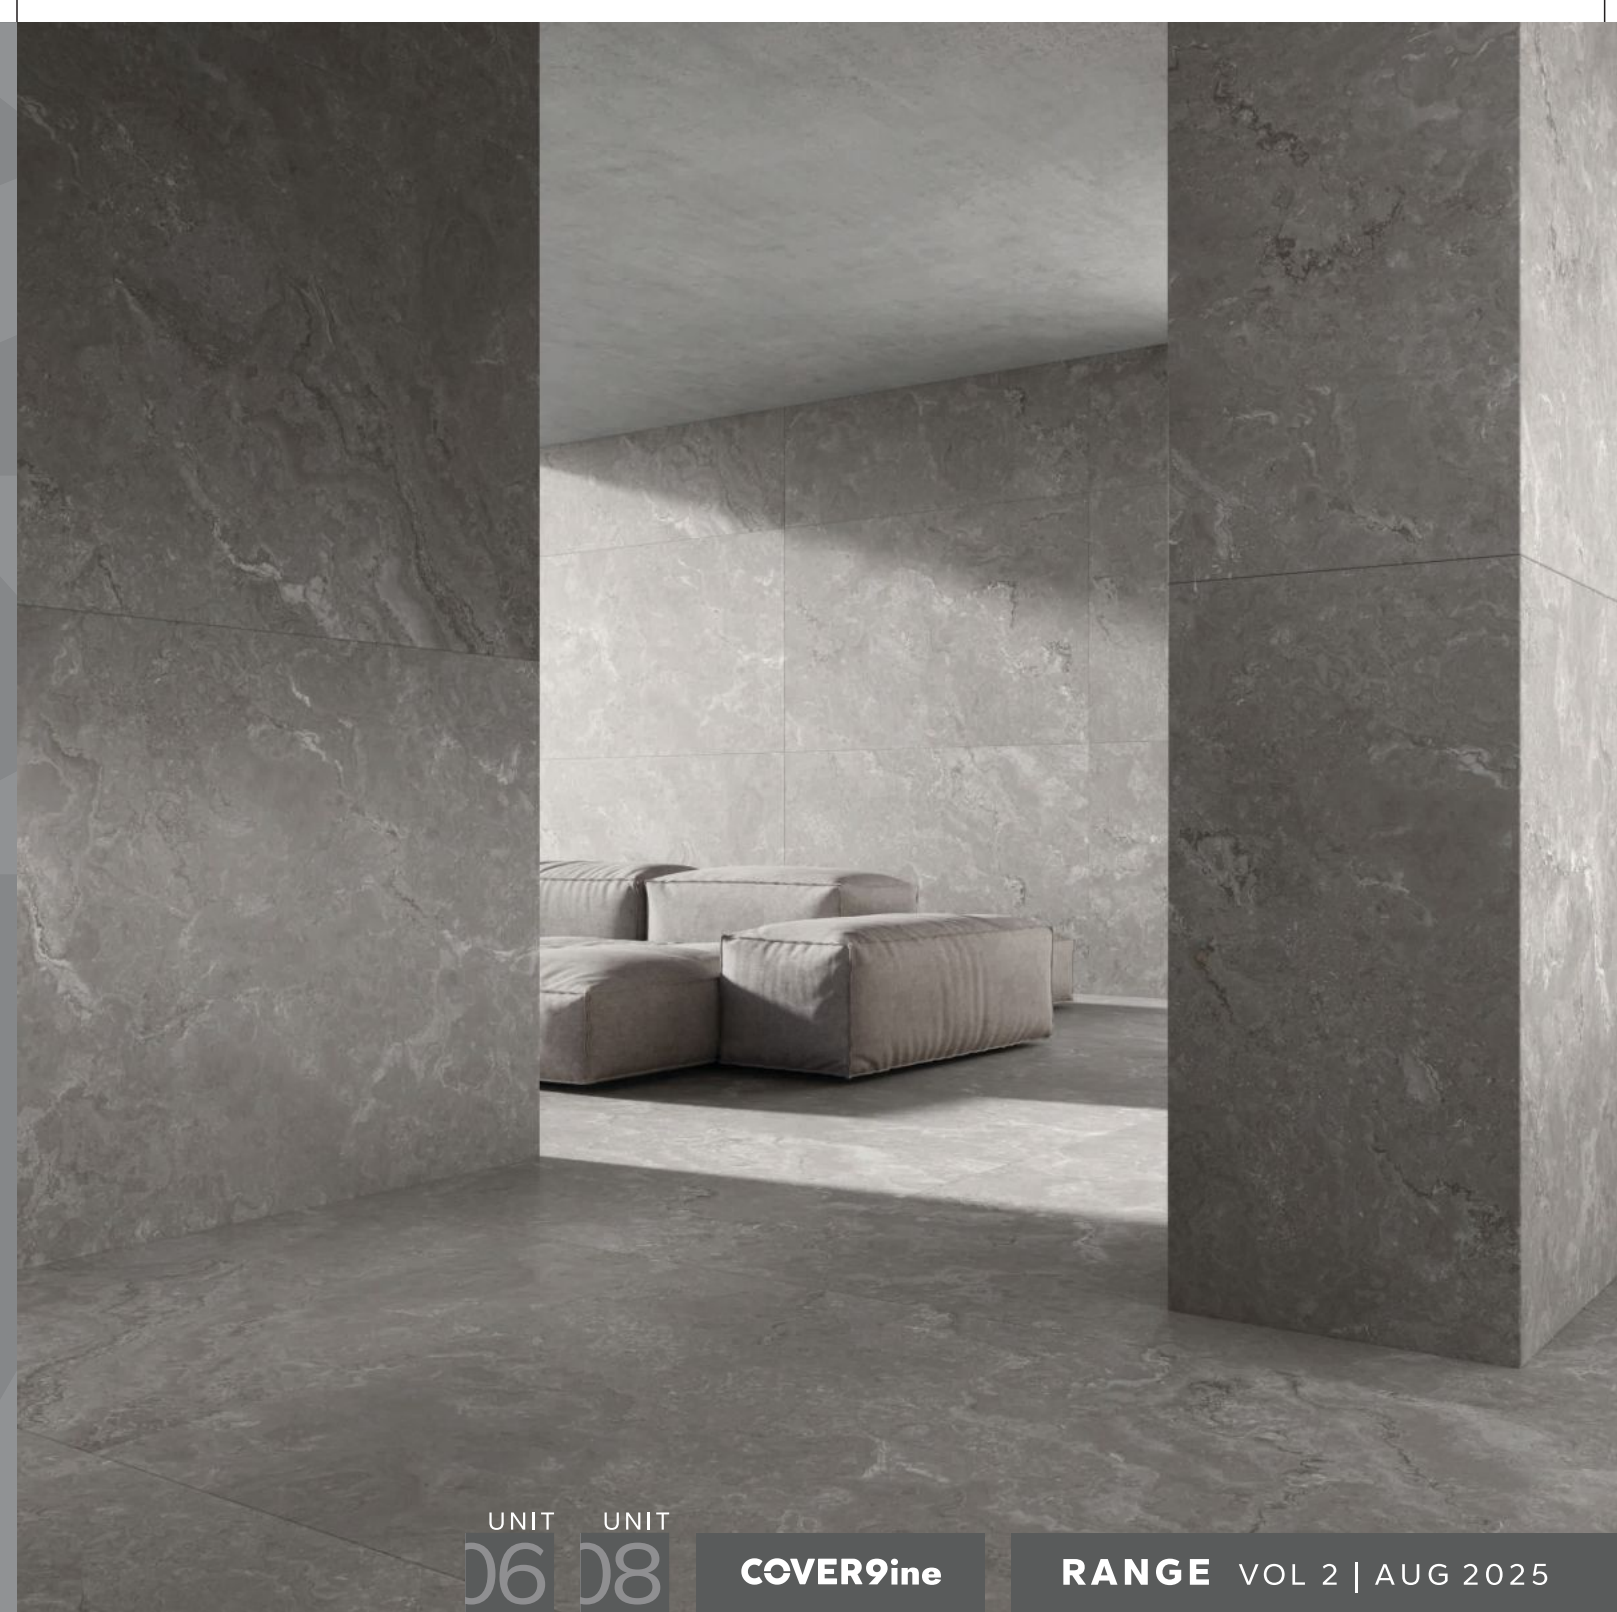

UNIT UNIT  
06 08

COVER9ine

RANGE VOL 2 | AUG 2025

**SOMANY**

**Somany Ceramics Limited**

**Corporate Office:** F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900

**Ahmedabad Office:** 601 - 606, 6th Floor, Aals Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.

**Registered Office:** 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913

**www.somanyceramics.com | E-mail: [customer care@somanyceramics.com](mailto:customer care@somanyceramics.com)**

**Toll Free No.: 1800-103-0004 (Timing: 10:00 AM - 6:30 pm; Mon - Fri)**

PORTO / CAT / AUGUST 2025

**PORTO**  
collection

1200 x 1800mm  
600 x 1200mm

**SOMANY**



**Unravelling the Beauty  
of Organic Design**

# PORTO

collection


## Design Through The Ages

In a world where nature's artistry unfolds in layers, Porto's matted elegance stands as a testament to the raw beauty of natural stone. Its enduring strength reflects a material that has withstood geological eras, seamlessly retaining its charisma in contemporary design. As you gaze upon its surface, a rich palette of earthy tones captivates your senses. Deep slate hues mingle with warmer shades, accented by subtle flecks that reveal the intricate artistry of natural formation. Yet, its tactile velvety softness, with low-sheen is inviting while diffusing light in a soft, understated way, elevating the architectural nuances of any space. The surface, though strong and resilient, offers a tactile experience that feels comforting to the touch. This unique blend of strength and softness ensures not just visual appeal, but a surface that engages the senses, offering both beauty and practicality in equal measure.



# 1 Design 5 Shades 1 Punch

Sizes: 1200x1800mm | 600x1200mm | Thickness: 9mm | Design: 1 | Shades: 5 | Punch: 1

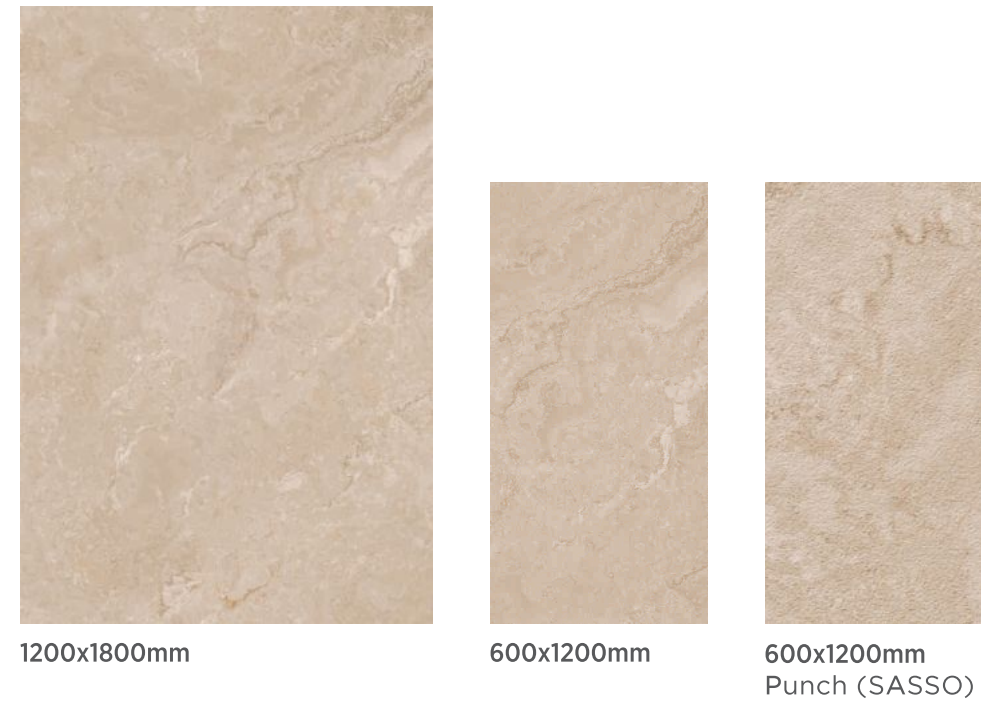

POWERED BY

Quilltouch surface offers a velvety, non-reflective matt finish (Reflective Gloss Index <8) with exceptional softness and clarity. Engineered for durability, it provides PEI-4 abrasion resistance, making them ideal for high-traffic areas. Their design clarity ensures sharp detail even in dark shades, blending elegance, resilience, and precision for versatile residential and commercial use.

## TECHNICAL FEATURES



### MOH'S SCALE HARDNESS >6

High density sintering for a robust surface which is a crucial factor to consider when choosing tiles, especially for high-traffic & high-stress areas.

### ABRASION RESISTANT PEI-V

Our tiles are designed to withstand the test of time, even in high-traffic areas. Their superior abrasion resistance ensures durability and maintains their pristine appearance for years.

### SLIP RESISTANT R 9

R 9 slip resistant tiles are a great choice for areas that may get wet. They offer a good balance of slip resistance and aesthetics, making them suitable for both residential and commercial settings.

### REFLECTIVE GLOSS INDEX <8

Our tiles feature a subtle, low-reflection finish, reducing glare and creating a more comfortable visual experience. This makes them ideal for various settings, including spaces with significant natural light.

## APPLICATION AREAS



## AVAILABLE SHADES

Punch (SASSO)



Sizes	Surface	Thickness	Variation
1200x1800mm	Quilltouch	9	V4
600x1200mm	Quilltouch	9	V4
600x1200mm - Punch (SASSO)	Quilltouch	9	V4

PORTO MARRONE

PORTO AVORIO

PORTO AVENA

PORTO SLATE

PORTO GRIGE



1


2

3

4

5

Punch (SASSO)

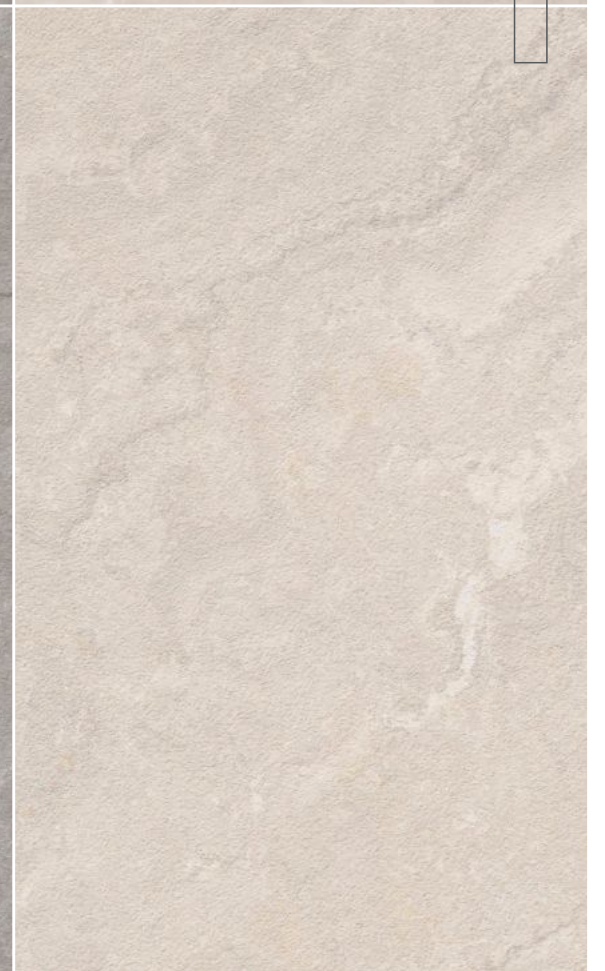

PORTO MARRONE

PORTO MARRONE 180 QUILL  
GRANDE PORTO MARRONE QUILL  
GRANDE PORTO MARRONE SASSO QUILL



*Embrace the Enduring  
Charm of Earth*



WALL: GRANDE PORTO MARRONE SASSO QUILL | SIZE: 600X1200MM | SURFACE: QUILLTOUCH | PUNCH: SASSO  
FLOOR: PORTO MARRONE 180 QUILL | SIZE: 1200X1800MM | SURFACE: QUILLTOUCH  
TABLE: NECTAR CREMA OPACO | SIZE: 75X300MM | SURFACE: RANDOM PUNCH (MATT)



PORTO AVORIO

PORTO AVORIO 180 QUILL  
GRANDE PORTO AVORIO QUILL  
GRANDE PORTO AVORIO SASSO QUILL



*A Radiant  
Echo of Light*



WALL: GRANDE PORTO AVORIO SASSO QULL | SIZE: 600X1200MM | SURFACE: QUILLTOUCH | PUNCH: SASSO  
FLOOR: PORTO AVORIO 180 QULL | SIZE: 1200X1800MM | SURFACE: QUILLTOUCH  
HIGHLIGHTER WALL: STRIO VALOR MODERNA WOOD WENGE | SIZE: 200X1200MM | SURFACE: MATT



PORTO AVENA

PORTO AVENA 180 QUILL  
GRANDE PORTO AVENA QUILL  
GRANDE PORTO AVENA SASSO QUILL



*The Essence  
of Serenity*



WALL: GRANDE PORTO AVENA SASSO QUILL | SIZE: 600X1200MM | SURFACE: QUILLTOUCH | PUNCH: SASSO  
FLOOR: PORTO AVENA 180 QUILL | SIZE: 1200X1800MM | SURFACE: QUILLTOUCH  
WALL: GRANDE PORTO AVENA QUILL | SIZE: 600X1200MM | SURFACE: QUILLTOUCH



PORTO SLATE

- PORTO SLATE 180 QUILL
- GRANDE PORTO SLATE QUILL
- GRANDE PORTO SLATE SASSO QUILL



*The Strength  
of Depth*



WALL: GRANDE PORTO SLATE SASSO QUILL | SIZE: 600X1200MM | SURFACE: QUILLTOUCH | PUNCH: SASSO  
FLOOR: PORTO SLATE 180 QUILL | SIZE: 1200X1800MM | SURFACE: QUILLTOUCH  
HIGHLIGHTER WALL: NECTAR GREEN LUCIDO | SIZE: 75X300MM | SURFACE: RANDOM PUNCH (GLOSSY)



PORTO GRIGE

PORTO GRIGE 180 QUILL  
GRANDE PORTO GRIGE QUILL  
GRANDE PORTO GRIGE SASSO QUILL



*A Subtle Symphony  
of Soft Shadows*



WALL: PORTO GRIGE 180 QUILL | SIZE: 1200X1800MM | SURFACE: QUILLTOUCH  
FLOOR: PORTO GRIGE 180 QUILL | SIZE: 1200X1800MM | SURFACE: QUILLTOUCH  
WALL: GRANDE PORTO GRIGE SASSO QUILL | SIZE: 600X1200MM | SURFACE: QUILLTOUCH | PUNCH: SASSO  
COUNTER: STELLA BERLY 26 MATT | SIZE: 800X2600MM | SURFACE: MATT



# TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR PORTO 1200X1800MM COLLECTION				
Nominal Size(mm)	Thickness(mm)	Avg. weight per carton(Kgs)	No. of tiles per carton	Coverage area per carton
1200x1800mm	9.0	92.00	2	4.32sq.mtr. / 46.50sq.ft.

TECHNICAL SPECIFICATIONS FOR PORTO 1200X1800MM COLLECTION				
Characteristics	Requirement as per IS 15622:2017 E ≤ 0.08 Group Bla	Requirement as per ISO 13006:2018 ≤ 0.5% Group Bla	Our Values	Test Method
<b>A) Dimension &amp; Surface Quality</b>				
<b>i) Length &amp; Width</b>	± 0.10%	± 0.5%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
<b>ii) Thickness</b>	± 5.00%	± 5.0%	± 3.0%	
<b>iii) Straightness of Side</b>	± 0.10%	± 0.50%	± 0.10%	
<b>iv) Rectangularity</b>	± 0.10%	± 0.60%	± 0.10%	
<b>v) Surface Flatness</b>				
<b>a) Center curvature (%) ( max.Deviation)</b>	± 0.50%	± 0.50%	± 0.2%	
<b>b) Edge curvature (%) ( max.Deviation)</b>	± 0.50%	± 0.50%	± 0.2%	
<b>c) Corner warpage (%) ( max.Deviation)</b>	± 0.50%	± 0.50%	± 0.2%	
<b>vi) Surface Quality</b>	Min. 95% of tiles will be free from visible defects	Min. 95% of tiles will be free from visible defects	Min. 95% of tiles will be free from visible defects	
<b>B) Physical Properties</b>				
<b>i) Water Absorption</b>	Average ≤ 0.08%, Individual Max 0.1%	Av ≤ 0.5%, Individual 0.6% max	< 0.08%, Individual Max 0.1%	IS 13630 Part 2/ISO 10545-3
<b>ii) Modulus of Rupture [N/mm<sup>2</sup>]</b>	Avg. 35, Individual 32 Min	Avg. 35, Individual 32 Min	Avr. > 35, Individual 32	IS 13630 Part 6/ISO 10545-4
<b>iii) Breaking Strength in N</b>	1300	Min.1300	Min. 1800 N	
<b>iv) Moisture Expansion in mm/m</b>	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10
<b>v) Scratch Hardness of surface (Mohs)</b>	Min 5	N.A.	>6	IS 13630 Part 13
<b>vi) Resistant to Abrasion of Glazed Tiles (Class I to V)</b>	Min II	Abrasion Class & Cycle passed	Class IV	IS 13630 Part 11/ISO 10545-7
<b>vii) Coefficient of linear thermal expansion from ambient temperature to 100° C</b>	6 X 10 <sup>-4</sup> K <sup>-1</sup> Max	Test Method Available	Max 6 X 10 <sup>-4</sup> K <sup>-1</sup> Max	IS 13630 Part 4/ISO 10545-8
<b>viii) Thermal Resistant</b>	10 cycle min	Required	10 cycle passed	IS 13630 Part 5/ISO-10545-9
<b>ix) Craze Resistant</b>	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO-10545-11
<b>x) Impact Resistant as Coefficient of Restitution (COR)</b>	0.55 min	Test Method Available	Min 0.55	IS 13630 Part 14/ISO-10545-5
<b>xi) Frost Resistant</b>	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
<b>C) Chemical Resistant (Glazed Tiles)</b>				
<b>i) Stain Resistant</b>	Min Class-1	Min Class 3	Class-1	IS 13630 Part 8 & ISO 10545-14
<b>ii) Resistant to household chemicals</b>	Min Class AA	Min B	Min Class AA	IS 13630 Part 8/ISO 10545-13
<b>iii) Resistant to acids and alkalis (with exception of hydrofluoric acid and its compounds)</b>	Required if agreed	declared value.	Min Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

PACKAGING DETAIL FOR PORTO 600X1200MM COLLECTION				
Nominal Size(mm)	Thickness(mm)	Avg. weight per carton(Kgs)	No. of tiles per carton	Coverage area per carton
600x1200mm	8.8 mm (+/-0.4%)	27.5KG +/- 0.5KG	2	1.44sq.mtr./15.50sq.ft.


TECHNICAL SPECIFICATIONS FOR PORTO 600X1200MM COLLECTION					
Characteristics	Requirement as per IS 15622 :2017 Table-09, W.A E <0.08 Group Bla	Requirement as per ISO 13006 Annex-G, E ≤ 0.5% Group Bla	Our Values	Test Method	
<b>A) Dimension &amp; Surface Quality</b>				IS-13630	ISO 10545
<b>i) Length &amp; Width</b>	Rectified	± 0.30%	± 0.10%	IS 13630 Part 1	ISO 10545 Part 2
<b>ii) Thickness</b>	± 5.0%	± 5.0%	± 4.0%		
<b>iii) Straightness of Side</b>	± 0.10%	± 0.3%	± 0.10%		
<b>iv) Rectangularity</b>	± 0.10%	± 0.30%	± 0.10%		
<b>v) Surface Flatness</b>					
<b>a) Center curvature (%) ( max.Deviation)</b>	± 0.5%	± 0.4%	± 0.20 %		
<b>b) Edge curvature (%) ( max.Deviation)</b>	± 0.5%	± 0.4%	± 0.20 %		
<b>c) Corner warpage (%) ( max.Deviation)</b>	± 0.5%	± 0.4%	± 0.20 %		
<b>vi) Surface Quality</b>	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects		
<b>B) Physical Properties</b>					
<b>i) Water Absorption</b>	Average ≤ 0.08%, Individual Max 0.1%	Av ≤ 0.5%, Individual 0.6% max	0.08 average max	Part 2	Part 3
<b>ii) Modulus of Rupture [N/mm<sup>2</sup>]</b>	Avg. 35, Individual 32 min	Avg 35, Individual 32 min	Min 35	Part 6	Part 4
<b>iii) Breaking Strength in N</b>	Min.1300	Not less than 1300	Min.1300		
<b>iv) Moisture Expansion in mm/m</b>	0.02 Max	Test Method Available	0.02 Max	Part 3	Part 10
<b>v) Scratch Hardness of surface (Mohs)</b>	Min 5	N/A	5	Part 13	
<b>vi) Resistant to Deep Abrasion of Un-Glazed Tiles</b>	N/A	N/A	N/A	Part 12	Part 6
<b>vii) Resistant to Abrasion of Glazed Tiles (Class I to V)</b>	Commercial application Min IV Home Application Min II	Report Abrasion Class & Cycle Passed	Class IV	Part 11	Part 7
<b>viii) Coefficient of linear thermal expansion from ambient temperature to 100° C</b>	6 X 10 <sup>-4</sup> K <sup>-1</sup> max	Test Method Available	6 X 10 <sup>-4</sup> K <sup>-1</sup> max	Part 4	Part 8
<b>ix) Thermal Resistant</b>	10 cycle min	Test Method Available	Passed 10 cycle	Part 5	Part 9
<b>x) Craze Resistant</b>	4 cycle @ 7.5bar min	Required	Passed 4 cycle	Part 9	Part 11
<b>xi) Frost Resistant</b>	Required, if agreed	Test Method Available	Resistance	Part 10	Part 12
<b>xii) Bulk Density</b>	NA	NA	NA	Part 2	
<b>xiii) Impact Resistant</b>	0.55 Min	Test Method Available	0.55 min	Part 14	Part 5
<b>C) Chemical Resistant (Glazed Tiles)</b>					
<b>i) Stain Resistant</b>	Min Class 1	Min Class 3	Class-1	Part 8	Part 14
<b>ii) Resistant to household chemicals</b>	Min Class AA	Min. Class B	Min Class AA	Part 8	Part 13
<b>iii) Resistant to acids and alkalis (with exception of hydrofluoric acid and its compounds)</b>	Required if agreed	Manufacture to state classification	Min Class AA		

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE



TILE VISUALISER

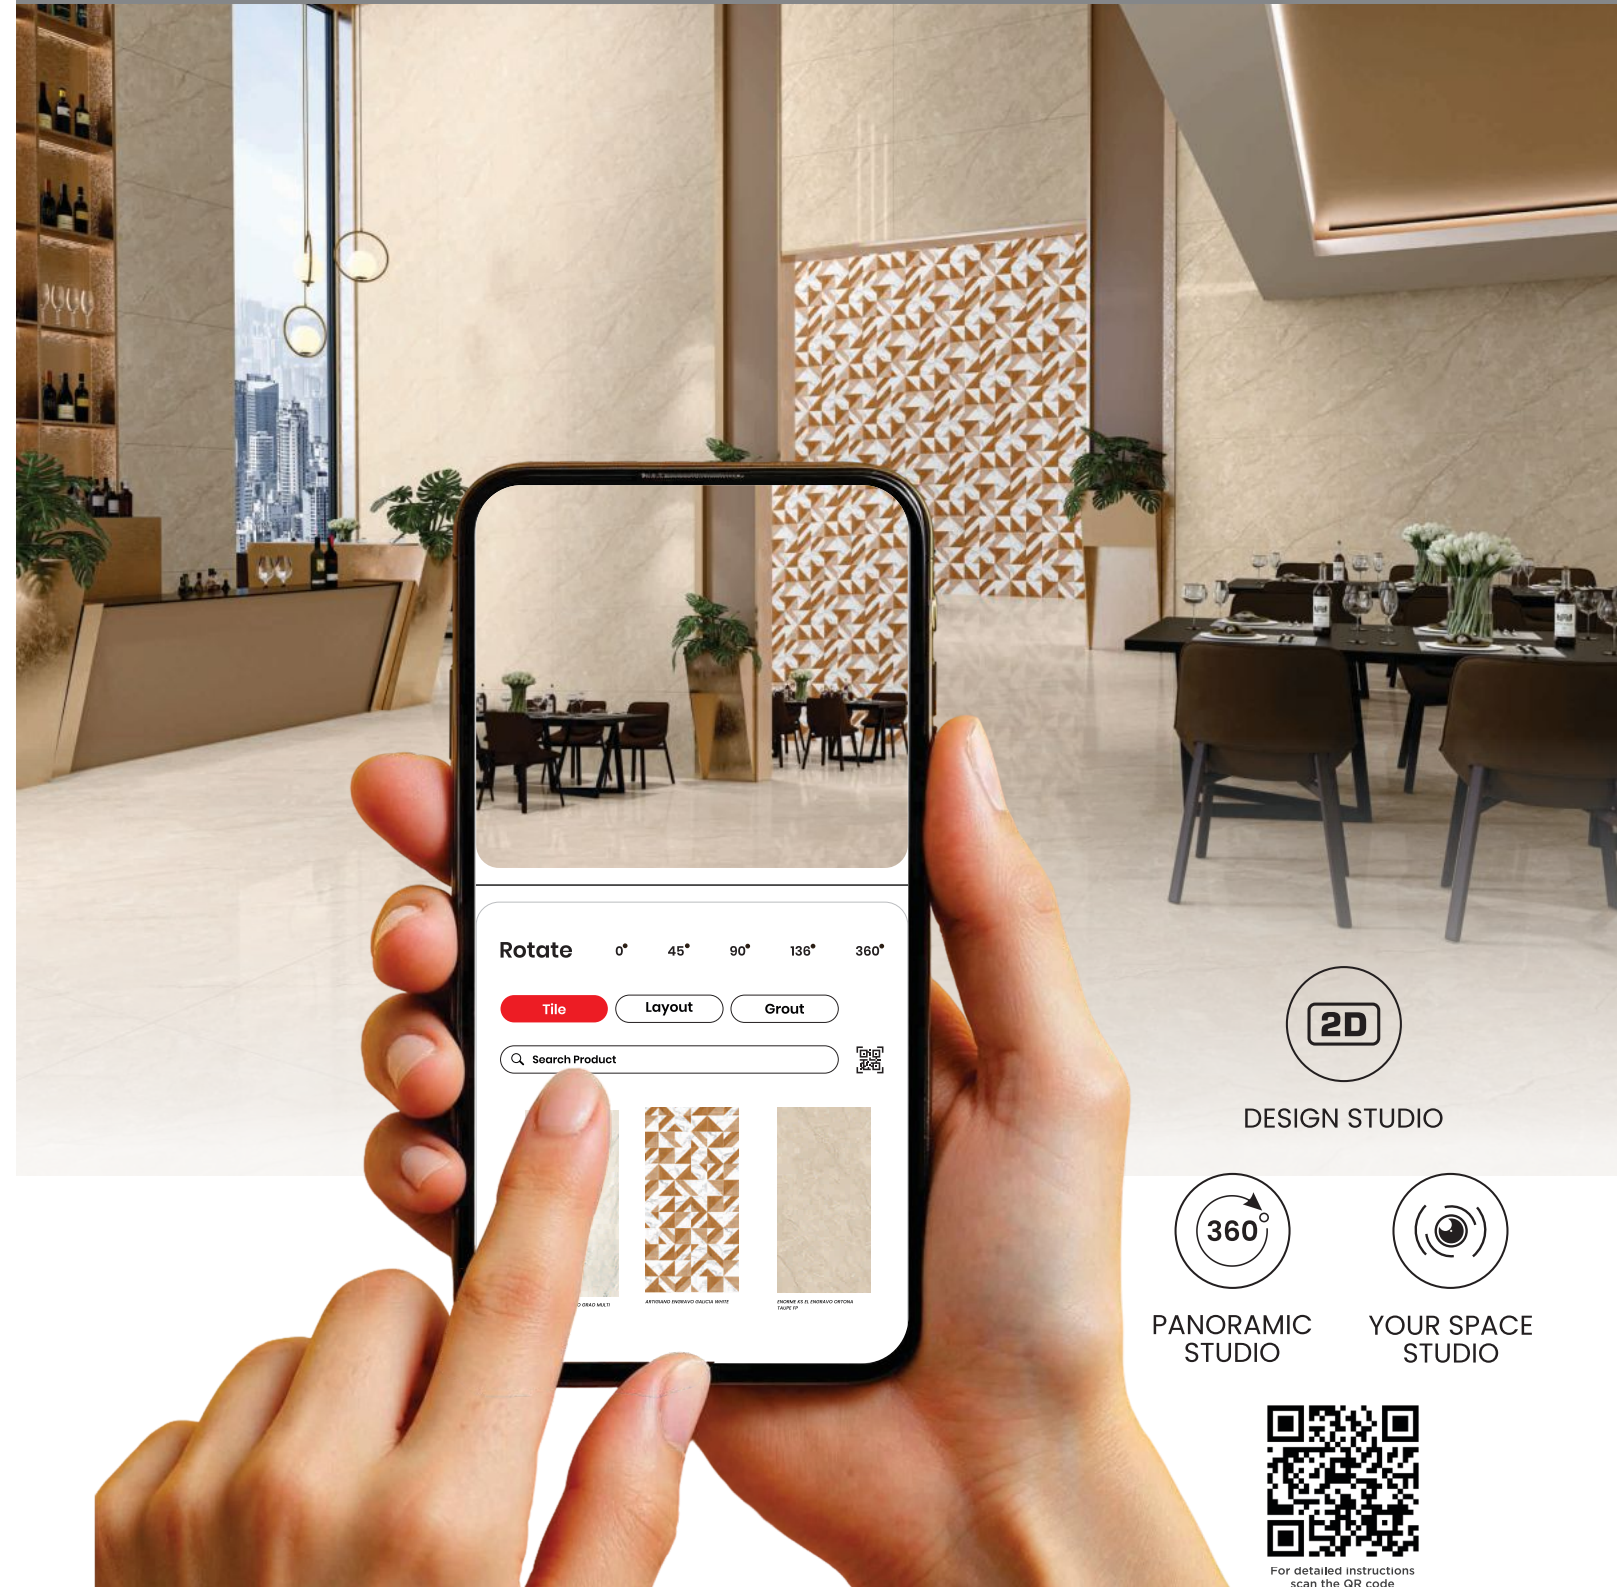

Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser, and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | [www.somanyceramics.com](http://www.somanyceramics.com)

# SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner

# SOMANY Bathware

# SOMANY French Collection



## Lasting Bonds Made Ezy


Behind Every Stunning Tile, there's a Stronger Bond!  
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.



For detailed instructions scan the QR code

Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome  
Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit

-   
**EASY TO USE**
-   
**HIGH STRENGTH POLYMER FORTIFIED ADHESIVE**
-   
**WIDE APPLICATION RANGE**
-   
**HIGHLY FLEXIBLE**
-   
**SUITABLE FOR WET WALL SURFACES**
-   
**SELF - CURING ADHESIVE**
-   
**SUITABLE FOR TILE ON TILE APPLICATION**

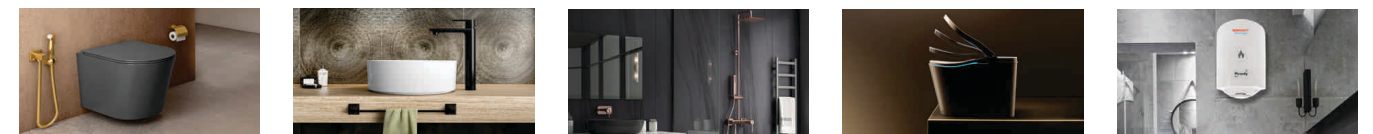

Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

To know more visit at [www.somanyceramics.com](http://www.somanyceramics.com) or call on Toll Free: 1800 103 0004

Toll Free: 1800-103-0004 | [www.somanyceramics.com](http://www.somanyceramics.com)