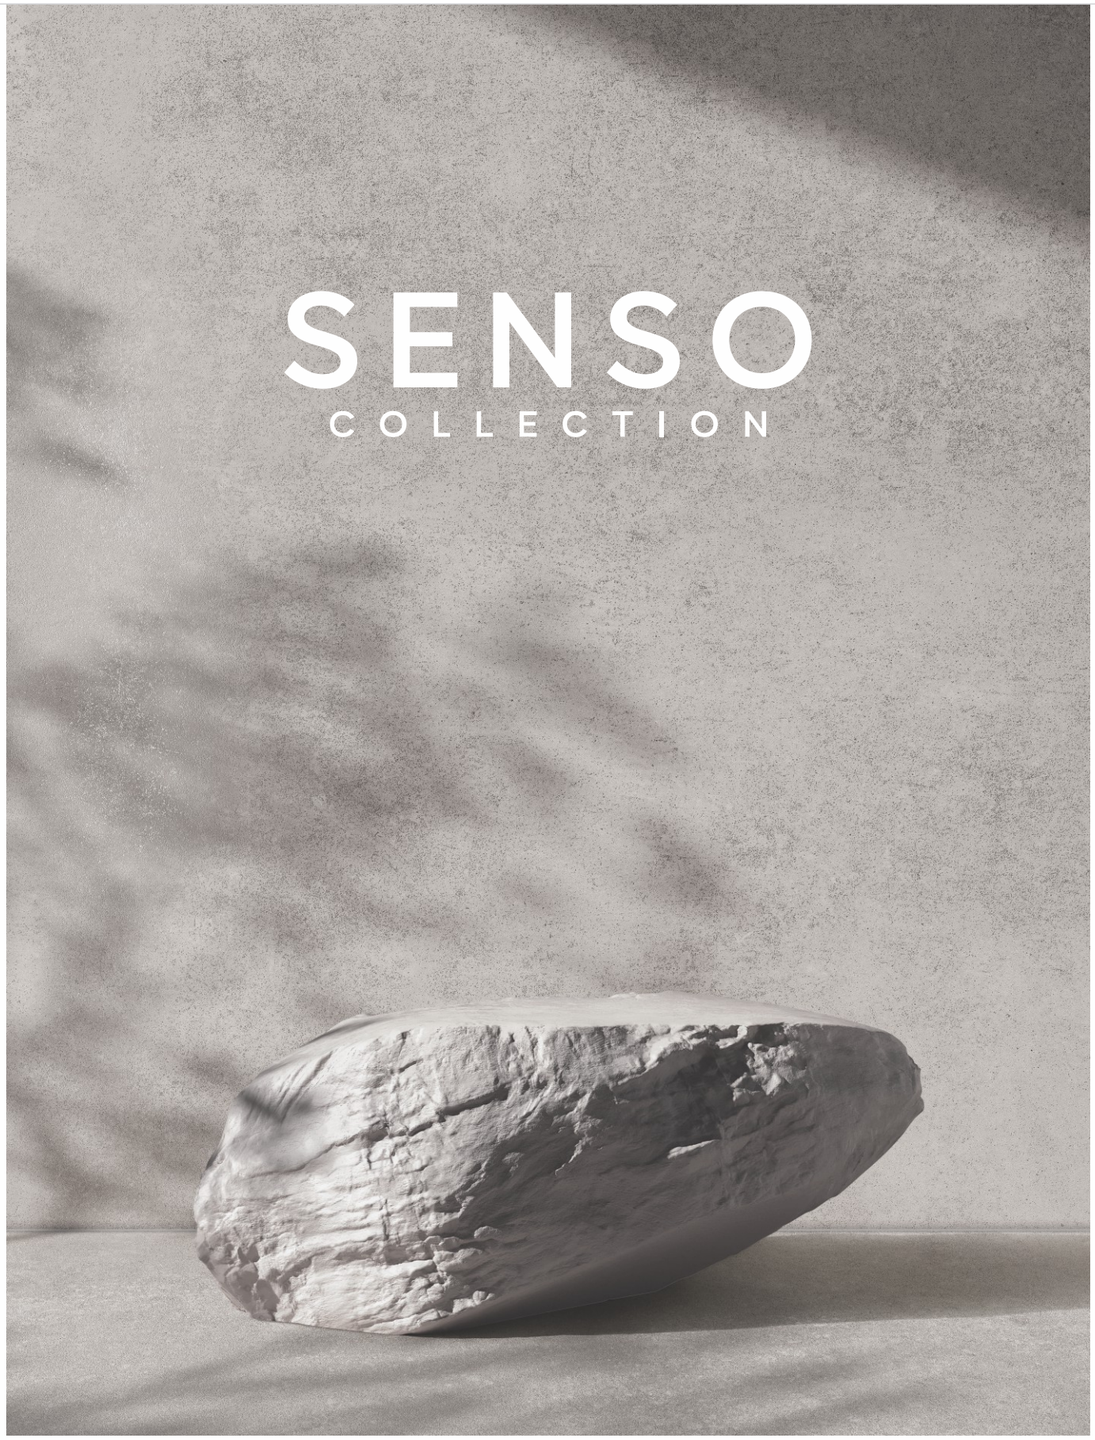

SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

COVER9ine / SENSO / CATALOGUE / JAN 2026

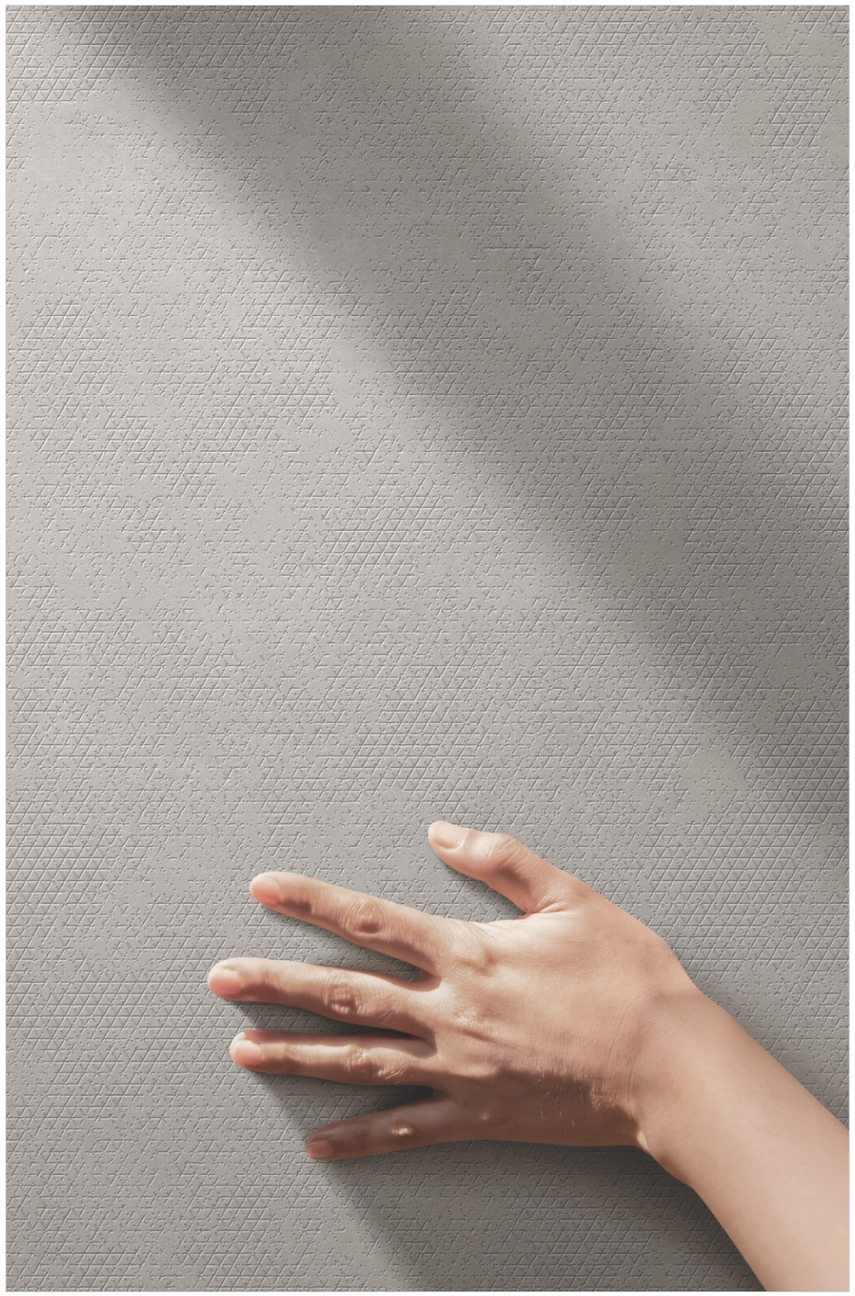

Tactile Timeless Senso

Somewhere between silence and stone, time leaves behind a memory in textures, in tactility. A quiet erosion, a whisper of wind, a subtle caress spanning centuries. These impressions etched into ancient rocks are now reborn in the Senso collection.

06 Designs
04 Sizes
02 Surfaces
08 Accent Designs

GLAZED VITRIFIED TILES

SIZES	1200x1800mm	48"x71"
	600x1200mm	24"x48"
	75x300mm	3"x12"
	200x200mm	8"x8"

SURFACES	ShapeTech
	Matt Carving

THICKNESS	9mm





ShapeTech

ShapeTech digitally recreates the layered intricacies of natural stones with extraordinary precision. This technology delivers multidimensional textures that are visually dynamic and tactile, offering an experience indistinguishable from that of real stone.

Matt Carving

Matt Carving surface brings quiet sophistication to modern interiors. With refined textures and graceful dimensionality, this surface captures light in a way that highlights its intricate details, adding subtle drama and timeless elegance to any space. Ideal for interiors that seek understated luxury with a distinctive edge.





Versatile Solution

The Senso collection combines contemporary design with extraordinary performance. Each tile is engineered to resist stains, scratches, heat, chemicals, and more, making them ideal for both residential and commercial spaces. These surfaces don't just endure, they retain their elegance and strength for years, delivering enduring beauty with minimal maintenance.

Application Areas

- RESTAURANTS
- RETAIL MALLS
- SPA & WELLNESS
- RESIDENTIAL AREAS
- LIVING SPACES
- FITTED KITCHENS & BATHROOMS
- AIRPORTS
- HOTELS
- SHOPS
- OFFICES
- MUSEUMS
- SHOWROOMS

Technical Features

- SUITABLE FOR INDOORS & OUTDOORS
- HIGHLY UV RESISTANT
- FIRE & HEAT RESISTANT
- SCRATCH RESISTANT
- THERMAL SHOCK RESISTANT
- HYGIENIC SURFACE
- STAIN RESISTANT
- EASY TO CLEAN
- FROST RESISTANT
- CHEMICAL RESISTANT

Senso Collection

Malta Grey

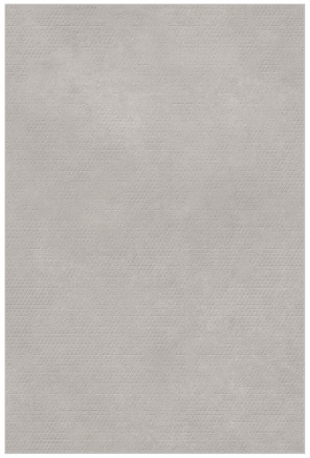

1200x1800mm
Matt Carving, ShapeTech

Malta Grey Rivera



600x1200mm
Punch

Malta Natural

1200x1800mm
Matt Carving, ShapeTech

Malta Natural Rivera

600x1200mm
Punch



Malta Tan



1200x1800mm
Matt Carving

Malta Tan Rivera



600x1200mm
Punch

Malta Oyster

1200x1800mm
Matt Carving

Malta Oyster Rivera

600x1200mm
Punch

Castle Copper



1200x1800mm
ShapeTech

Scan for a virtual view

Luxura Beige



1200x1800mm
ShapeTech



Malta Grey & Malta Natural

The Malta Series redefines industrial elegance with its raw texture and soft tones. The Malta Grey introduces a cool contemporary feel, while Malta Natural adds a warm neutrality perfect for balanced, modern spaces that feel both grounded and elevated.





Floor 1: **Malta Grey, 1200x1800mm**
Floor 2: **Malta Natural Rivera, 600x1200mm**

Accent Wall 1: **Domino Grey, 300x300mm**

Wall 1: **Malta Grey, 1200x1800mm**
Wall 2: **Malta Grey Rivera, 600x1200mm**



Floor 1: **Malta Grey, 1200x1800mm**
Floor 2: **Malta Natural Rivera, 600x1200mm**
Accent Wall 2: **Domino Grey, 300x300mm**

Wall 1: **Malta Grey, 1200x1800mm**
Wall 2: **Malta Grey Rivera, 600x1200mm**
Accent Wall 1: **Swatch Grey, 200x200mm**

Scan for a virtual view





Malta Tan & Malta Oyster

Malta Tan offers a warm, sand-toned aesthetic that radiates comfort and subtle richness. In contrast, Malta Oyster delivers a light, airy palette that brightens interiors, both maintaining the raw appeal of cement with sophisticated restraint.



Floor: **Malta Tan, 1200x1800mm**
Accent Floor: **Swatch Tan, 200x200mm**





Floor: **Malta Tan, 1200x1800mm**



Floor: **Malta Tan, 1200x1800mm**
Accent Floor: **Swatch Tan, 200x200mm**

Wall 1: **Malta Tan Rivera, 600x1200mm**
Wall 2: **Mattoni Oyster, 75x300mm**
Backsplash Wall: **Domino Oyster, 300x300mm**

Scan for a
virtual view



2

Malta Grey

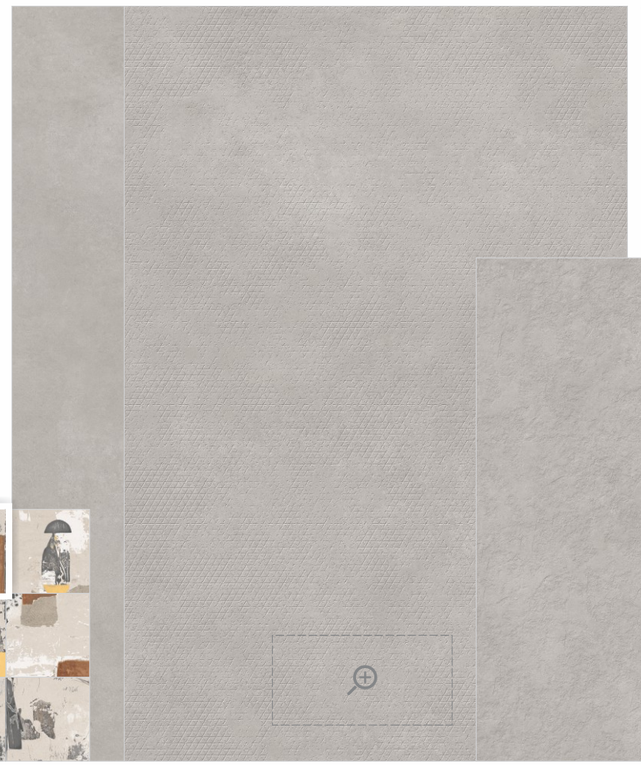

1

Malta Grey
Rivera

2

Mattoni
Grey



5

Swatch
Grey

4

Domino
Grey



3

No.	Sizes	Surfaces	Thickness	Randoms
1	1200x1800mm	Matt Carving, ShapeTech	9mm	3
2	600x1200mm	Punch	9mm	3
3	300x300mm	ShapeTech, Carving	9mm	–
4	200x200mm	Matt Carving	9mm	16
5	75x300mm	Matt	9mm	16



2

Malta Natural



1

Malta
Natural
Rivera

2

Mattoni
Natural



5

Swatch
Grey



4

Domino
Grey



3

No.	Sizes	Surfaces	Thickness	Randoms
1	1200x1800mm	Matt Carving, ShapeTech	9mm	3
2	600x1200mm	Punch	9mm	9
3	300x300mm	ShapeTech, Carving	9mm	–
4	200x200mm	Matt Carving	9mm	16
5	75x300mm	Matt	9mm	16



2

Malta Tan



1

Malta Tan
Rivera

2

Mattoni
Tan



5

Swatch
Tan



4

Domino
Oyster



3

No.	Sizes	Surfaces	Thickness	Randoms
1	1200x1800mm	Matt Carving	9mm	3
2	600x1200mm	Punch	9mm	3
3	300x300mm	ShapeTech, Carving	9mm	–
4	200x200mm	Matt Carving	9mm	16
5	75x300mm	Matt	9mm	16



2

Malta Oyster



1

Malta Oyster
Rivera

2

Mattoni
Oyster



5

Swatch
Tan



4

Domino
Oyster



3

No.	Sizes	Surfaces	Thickness	Randoms
1	1200x1800mm	Matt Carving	9mm	3
2	600x1200mm	Punch	9mm	9
3	300x300mm	ShapeTech, Carving	9mm	–
4	200x200mm	Matt Carving	9mm	16
5	75x300mm	Matt	9mm	16

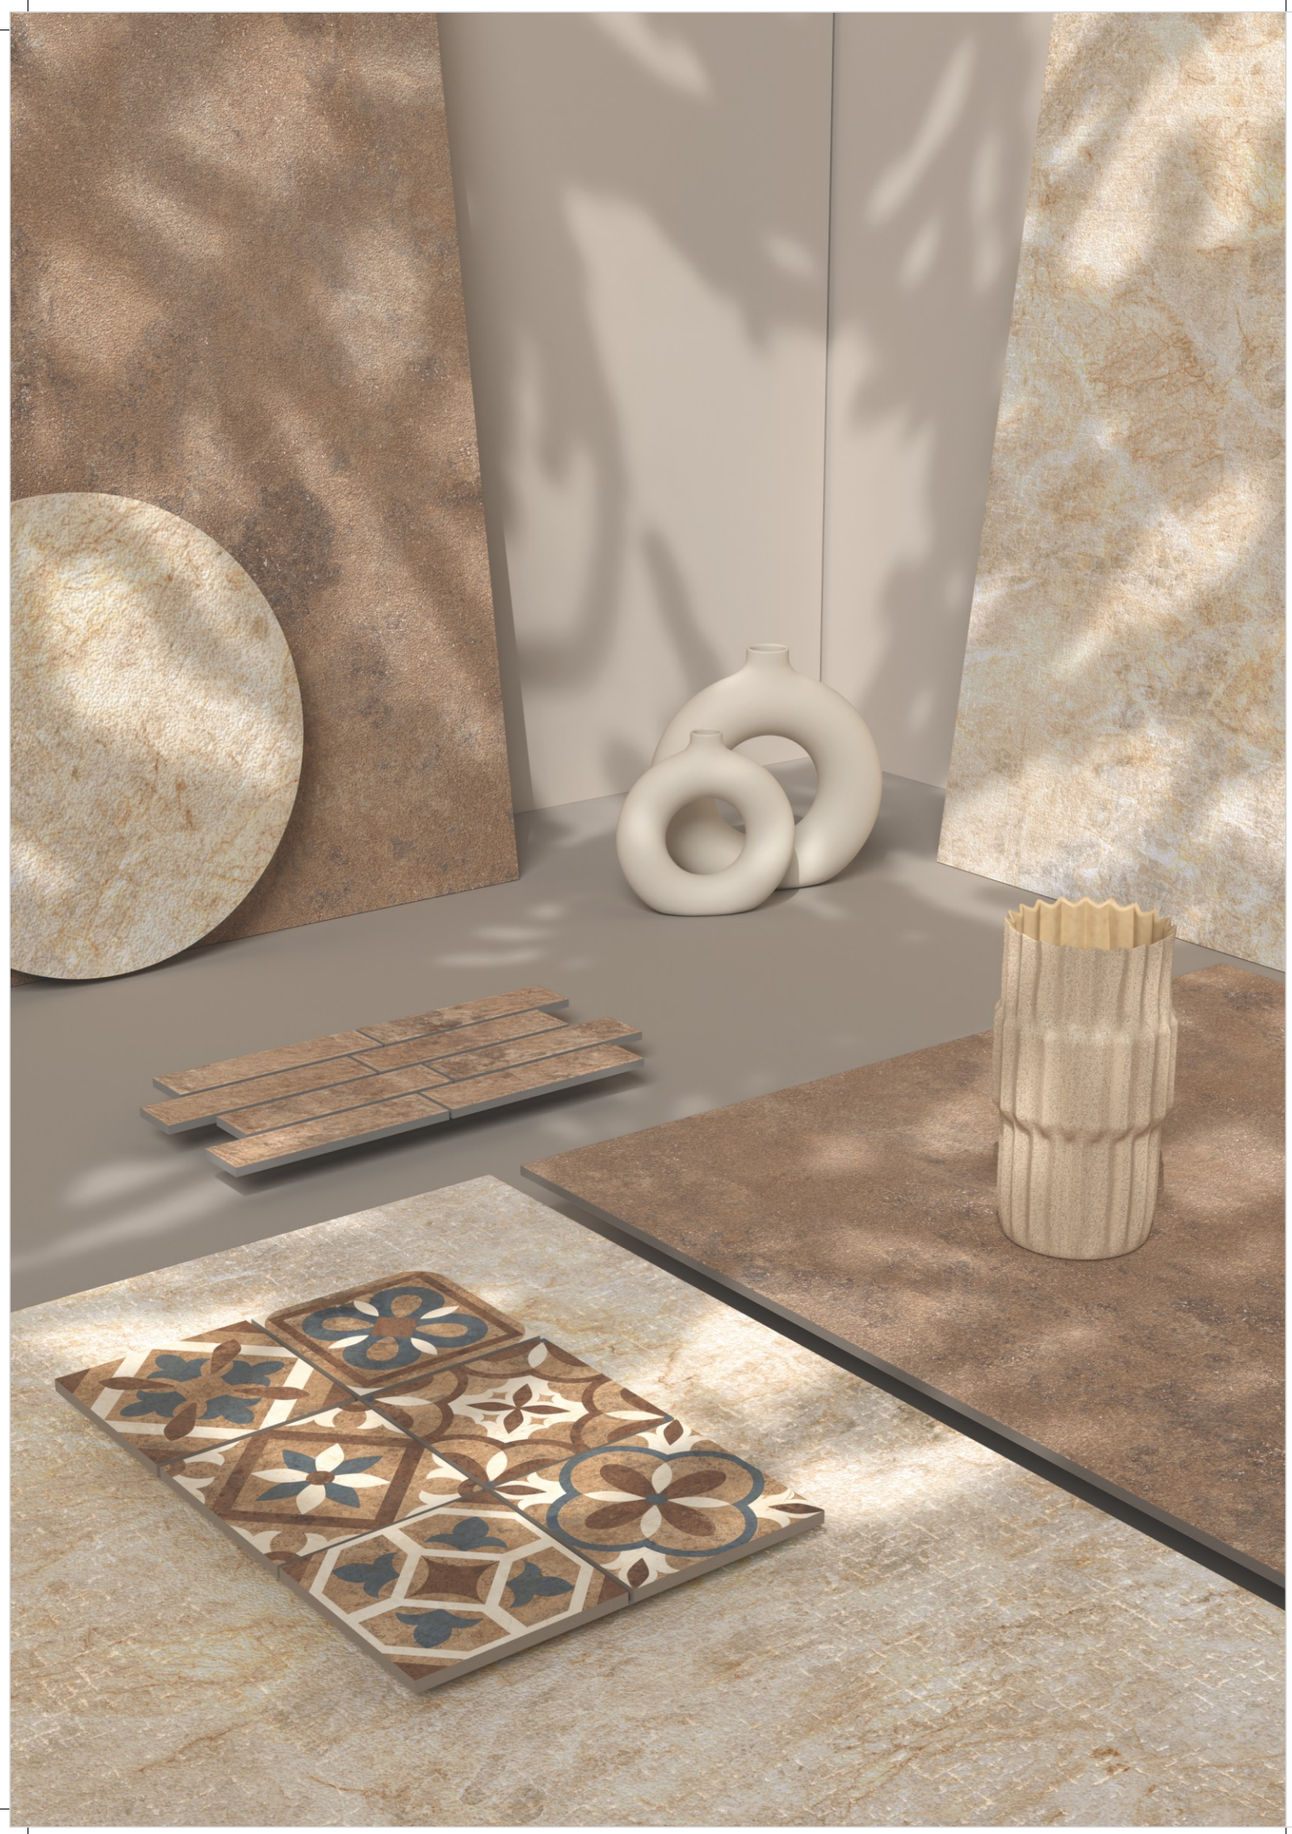

Castle Copper & Luxura Beige

Castle Copper features warm metallic undertones and textured surfaces that bring regal richness to interiors. Luxura Beige, on the other hand, embodies understated luxury with soft, creamy hues and a refined texture that exudes calm and elegance. Together, they offer dramatic contrast and harmonious versatility.





Wall & Steps: **Luxura Beige, 1200x1800mm**

Wall Front: **Mattoni Luxura, 75x300mm**
Accent Wall: **Royale Rustic, 200x200mm**





Floor: **Castle Copper, 1200x1800mm**
Wall & Steps: **Luxura Beige, 1200x1800mm**
Wall Front: **Mattoni Luxura, 75x300mm**
Accent Wall: **Royale Rustic, 200x200mm**

Scan for a
virtual view



2

Castle Copper

1



Royale
Rustic



2

Mattoni
Castle



3

No.	Sizes	Surfaces	Thickness	Randoms
1	1200x1800mm	ShapeTech	9mm	2
2	200x200mm	Matt Carving	9mm	9
3	75x300mm	Matt	9mm	16



2

Luxura Beige

1



Royale
Rustic



2

Mattoni
Luxura



3

No.	Sizes	Surfaces	Thickness	Randoms
1	1200x1800mm	ShapeTech	9mm	2
2	200x200mm	Matt Carving	9mm	9
3	75x300mm	Matt	9mm	16

TECHNICAL SPECIFICATION FOR SENSO COLLECTION

CHARACTERISTICS	REQUIREMENT AS PER IS 15622 :2017 E ≤ 0.08 GROUP B I A	REQUIREMENT AS PER ISO 13006:2018 ≤ 0.5% GROUP B I A	OUR VALUES	TEST METHOD
Dimension & Surface Quality				
Length & Width %	± 0.10%	± 0.5%	± 0.10%	IS 13630 Part 1 / ISO 10545-2
Thickness %	± 5.0%	± 5.0%	± 3.0%	
Straightness of Side %	± 0.10%	± 0.50%	± 0.10%	
Rectangularity %	± 0.10%	± 0.60%	± 0.10%	
Surface Flatness				
Center Curvature (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Edge Curvature (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Corner Warpage (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	Average ≤ 0.08%, Individual Max.0.1%	Av ≤ 0.5 %, Individual 0.6% max	<0.08%, Individual Max 0.1%	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm²]	Avr 35, Individual 32 Min	Av 35, Individual 32 min	Avr. > 35, Individual 32	IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	1300	Min.1300	Min. 1300	
Moisture Expansion in mm/m	0.02	Test method available	0.02	IS 13630 Part 3 / ISO-10545-10
Scratch Hardness of surface (Mohs)	Min 5	N.A	Min 3	IS 13630 Part 13
Resistant to Abrasion of Glazed Tiles (Class I to V)	Min II	Abrasion Class & Cycle passed	PEI III	IS 13630 Part 11 /ISO 10545-7
Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C	6 X 10 $^{-6}$ K^{-1} max	Test method available	Max 6 X 10 $^{-6}$ K^{-1} max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistant	10 cycle Min	Required	10 cycle passed	IS 13630 Part 5/ISO-10545-9
Crazing Resistant	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
Impact Resistant as Co-efficient of Restitution (COR)	0.55 min	Test method available	0.55 Min	IS 13630 Part 14/ISO 10545-5
Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
Stain & Chemical Resistant (Glazed Tiles)				
Stain Resistant	Min Class 1	Min Class 3	Class 1	IS 13630 Part 8 & I SO 10545-14
Resistant to Household Chemicals	Min Class AA	Min B	Min Class AA	IS 13630 Part 8 / ISO 10545-13
Resistant to Acids and Alkalis (with exception of Hydrofluoric Acid and its compounds)	Required if agreed	Declared Value[f]	Min Class AA	

PACKAGING DETAIL FOR SENSO COLLECTION

Nominal Size (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
600x1200mm (Sinker)	8.2	27.2	2	1.44sq.mtr./15.5sq.ft.

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

TECHNICAL SPECIFICATION FOR SENSO COLLECTION

CHARACTERISTICS	REQUIREMENT AS PER IS 15622 :2017 E ≤ 0.08 GROUP B I A	REQUIREMENT AS PER ISO 13006:2018 ≤ 0.5% GROUP B I A	OUR VALUES	TEST METHOD
Dimension & Surface Quality				
Length & Width %	± 0.10%	± 0.5%	± 0.10%	IS 13630 Part 1 / ISO 10545-2
Thickness %	± 5.0%	± 5.0%	± 3.0%	
Straightness of Side %	± 0.10%	± 0.50%	± 0.10%	
Rectangularity %	± 0.10%	± 0.60%	± 0.10%	
Surface Flatness				
Center Curvature (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Edge Curvature (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Corner Warpage (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	Average ≤ 0.08%, Individual Max.0.1%	Av ≤ 0.5 %, Individual 0.6% max	<0.08%, Individual Max 0.1%	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm²]	Avr 35, Individual 32 Min	Av 35, Individual 32 min	Avr. > 35, Individual 32	IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	1300	Min.1300	Min. 1800	
Moisture Expansion in mm/m	0.02	Test method available	0.02	IS 13630 Part 3 / ISO-10545-10
Scratch Hardness of surface (Mohs)	Min 5	N.A	Carvo-6, Polish-3 Quill Glam-6 Quill Soft-5, Shape-6	IS 13630 Part 13
Resistant to Abrasion of Glazed Tiles (Class I to V)	Min II	Abrasion Class & Cycle passed	Carvo-IV, Polish-III, Quill Glam-IV, Quill Soft-III, Shape-III	IS 13630 Part 11 /ISO 10545-7
Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C	6 X 10 $^{-6}$ K^{-1} max	Test method available	Max 6 X 10 $^{-6}$ K^{-1} max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistant	10 cycle Min	Required	10 cycle passed	IS 13630 Part 5/ISO-10545-9
Crazing Resistant	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
Impact Resistant as Co-efficient of Restitution (COR)	0.55 min	Test method available	0.55 Min	IS 13630 Part 14/ISO 10545-5
Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
Stain & Chemical Resistant (Glazed Tiles)				
Stain Resistant	Min Class 1	Min Class 3	Class 1	IS 13630 Part 8 & I SO 10545-14
Resistant to Household Chemicals	Min Class AA	Min B	Min Class AA	IS 13630 Part 8 / ISO 10545-13
Resistant to Acids and Alkalis (with exception of Hydrofluoric Acid and its compounds)	Required if agreed	Declared Value[f]	Min Class AA	

PACKAGING DETAIL FOR SENSO COLLECTION

Nominal Sizes (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
1200x2400mm	9	61.7	1	2.88sq.mtr./31.00sq.ft.
1200x1800mm	9	91	2	4.32sq.mtr./46.50sq.ft.

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

TECHNICAL SPECIFICATION FOR SENSO COLLECTION

CHARACTERISTICS	REQUIREMENT AS PER IS 15622 :2017 0.08<E<3% GROUP B I b	REQUIREMENT AS PER ISO 13006:2018 ≤ 0.5% GROUP B I a	OUR VALUES	TEST METHOD
Dimension & Surface Quality				
Length & Width %	± 0.5%	± 0.6%	± 0.50%	IS 13630 Part 1 / ISO 10545-2
Thickness %	± 10.0%	± 5.0%	± 5.0%	
Straightness of Side %	± 0.50%	± 0.50%	± 0.50%	
Rectangularity %	± 0.60%	± 0.50%	± 0.50%	
Surface Flatness				
Center Curvature (%) (Max. Deviation)	± 0.75%	± 0.50%	± 0.50 %	
Edge Curvature (%) (Max. Deviation)	± 0.75%	± 0.50%	± 0.50 %	
Corner Warpage (%) (Max. Deviation)	± 0.75%	± 0.50%	± 0.50 %	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	Av 0.08<E<3%, Individual 3.3 max	Avg. 0.5 %, Individual 0.6% max	Avg. <0.5%	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm²]	Av 30, Individual 27 min	Avr 35, Individual 32 Min	Avr. > 35	IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	1100 N	Min 1300 N	Min. 1300 N	
Moisture Expansion in mm/m	0.02	Test method available	Max 0.02	IS 13630 Part 3 / ISO-10545-10
Scratch Hardness of surface (Mohs)	Min 5	N.A	Min. 6	IS 13630 Part 13
Resistant to Abrasion of Glazed Tiles (Class I to V)	Min II	Min Class II	Gr IV	IS 13630 Part 11 /ISO 10545-7
Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C	7 X 10^{-6} K^{-1} max	Test method available	Max 6 X 10^{-6} K^{-1} max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistant	10 cycle Min	Required	10 cycle passed	IS 13630 Part 5/ISO-10545-9
Crazing Resistant	4 cycle @ 7.5bar min	N.A.	4 cycle passed	IS 13630 Part 9/ISO 10545-11
Impact Resistant as Co-efficient of Restitution (COR)	0.55 min	Test method available	0.55 Min	IS 13630 Part 14/ISO 10545-5
Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
Stain & Chemical Resistant				
Stain Resistant	Not Available	Min Class 3	Class 2	IS 13630 Part 8 & I SO 10545-14
Resistant to Household Chemicals	Test method available	Min B	Min Class AA	IS 13630 Part 8 / ISO 10545-13
Resistant to Acids and Alkalis (with exception of Hydrofluoric Acid and its compounds)	Test method available	Declared Value[f]	A	

PACKAGING DETAIL FOR SENSO COLLECTION

Nominal Size (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
200x200mm (Unrectified)	8.0	13.0	19	0.76sq.mtr./8.18sq.ft.

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

TECHNICAL SPECIFICATION FOR SENSO COLLECTION

CHARACTERISTICS	Requirment as per IS 15622: 2017 E>10 Group BIII	Requirements as per ISO 13006: 2018 E>10 Group BIII	OUR VALUES	TEST METHOD
Dimension & Surface Quality				
Length & Width %	± 0.5%	± 0.6%	± 0.5%	IS 13630 Part 1 / ISO 10545-2
Thickness %	± 7.0%	± 10.0%	± 7.0%	
Straightness of Side %	± 0.2%	± 0.5%	± 0.2%	
Rectangularity %	± 0.3%	± 0.5%	± 0.3%	
Surface Flatness				
Center Curvature (%) (Max. Deviation)	± 0.3%	± 0.5%	± 0.3 %	
Edge Curvature (%) (Max. Deviation)	± 0.3%	± 0.5%	± 0.3 %	
Corner Warpage (%) (Max. Deviation)	± 0.3%	± 0.5%	± 0.3 %	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	E ≥ 10 % when it exceeds 20 % this shall be indecated by the manufacturer	E ≥ 10 % when it exceeds 20 % this shall be indecated by the manufacturer	Avg. 10-20 %	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm²]	Min 12	Average Min 12	Average > 12	IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	Min 200	Min.200	Min. 200	
Scratch Hardness of surface (Mohs)	Min 3	N.A	Min 3	IS 13630 Part 13
Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C	9 X 10^{-6} K^{-1} max	N.A.	Max 8 X 10^{-6} K^{-1} max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistant	10 cycle Min	Test method available	10 cycle Min	IS 13630 Part 5/ISO-10545-9
Crazing Resistant	4 cycle @ 7.5bar min	Manufacturer to Declared	4 cycle @ 7.5bar min	IS 13630 Part 9/ISO 10545-11
Stain & Chemical Resistant				
Stain Resistant	Min Class 1	Min Class 3	Class 1	IS 13630 Part 8 & ISO 10545-14 / ISO 10545-13
Resistant to Household Chemicals	Min Class AA	Test method available	Min Class AA	
Resistant to Acids and Alkalis (with exception of Hydrofluoric Acid and its compounds)	Required if agreed	Test method available	Min Class AA	

PACKAGING DETAIL FOR SENSO COLLECTION

Nominal Size (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
75x300mm (Rectified)	7.5	12.9	44	0.990sq.mtr./10.66sq.ft.

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.