







Somany Ceramics Limited: Noida: F-36, Sector-6; Ph.: 0120-4627900. Ahmedabad: 601 to 606, 6th floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad, Gujarat-382481. Ph.: 079-27661103 / 27661104 Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913 www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



















THE GRANDEUR AWAKENED!

A touch of class. The stroke of splendor. That is the Somany Vitro collection for you. An enchanting collection that makes you fall in love instantly. An embellishment for your beloved space looked never so elegant and grand without making it apparent. Come fall in love with Vitro!

FEATURES











600x1200MM

600x600MM





600x1200MM
Polished Vitrified Tiles

PERSONIFYING THE CHOICE OF LUXURY

















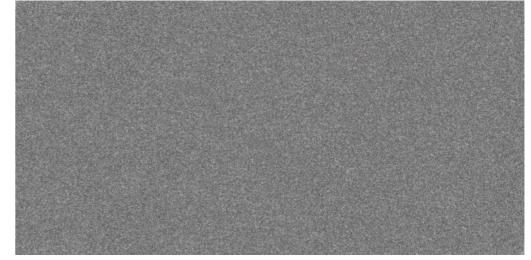

Orlando Grey Dark FP

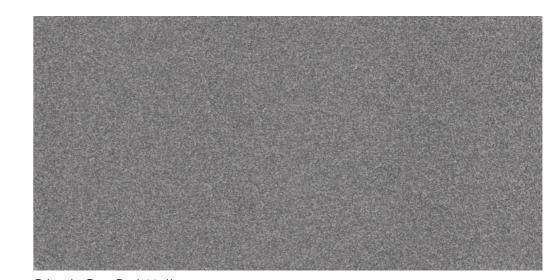

Orlando Grey Dark Matt



It creates a glamorous glass-like effect














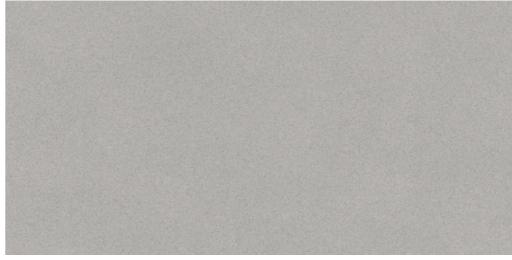

Orlando Grey FP

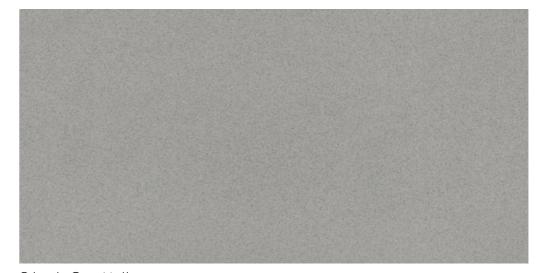

Orlando Grey Matt

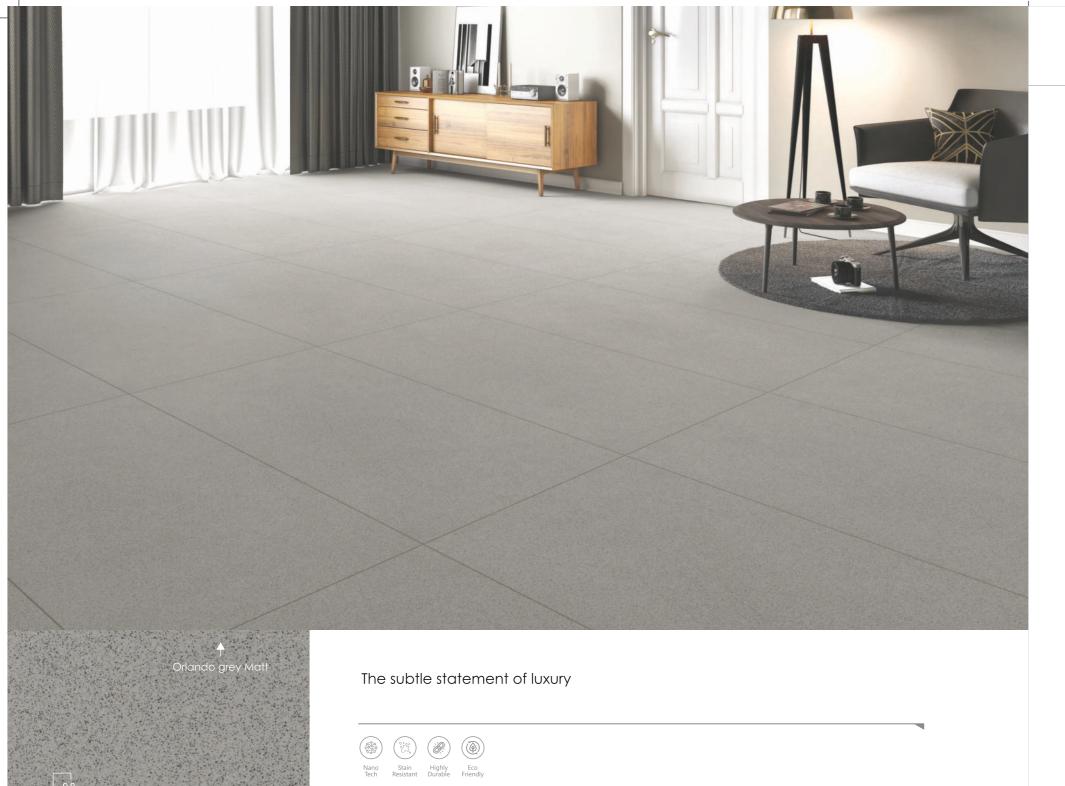









Orlando Olive FP

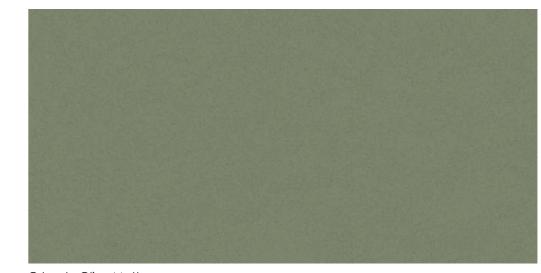


Orlando Olive Matt

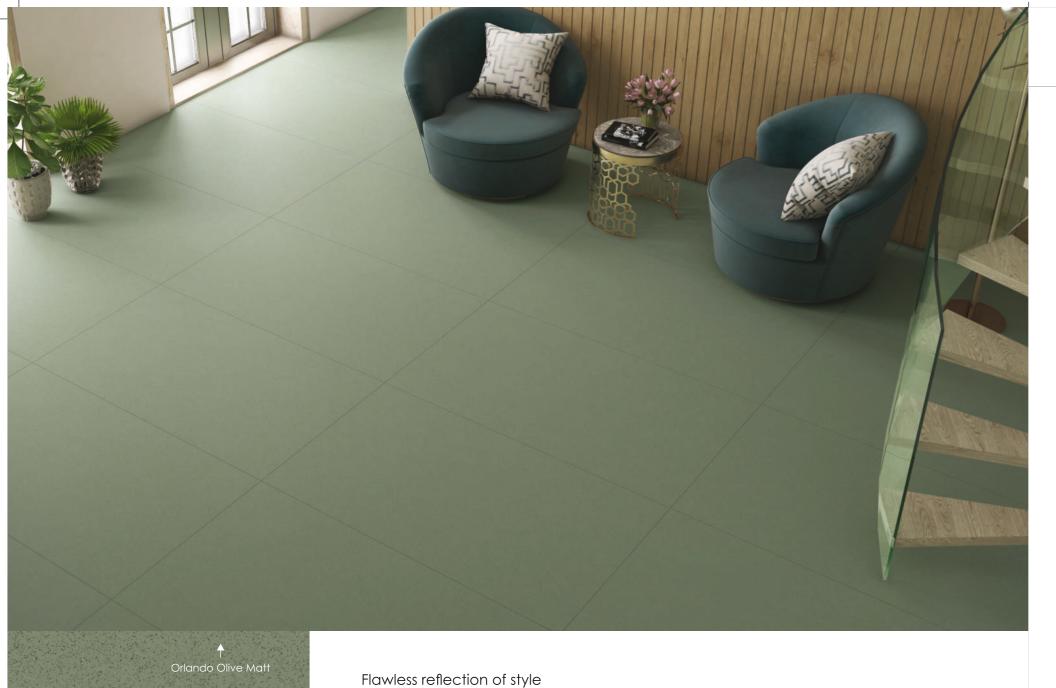





Orlando Brown FP

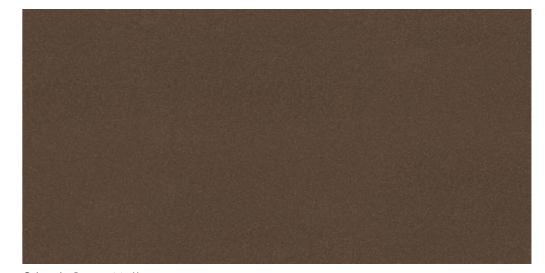

Orlando Brown Matt













Orlando Mist FP

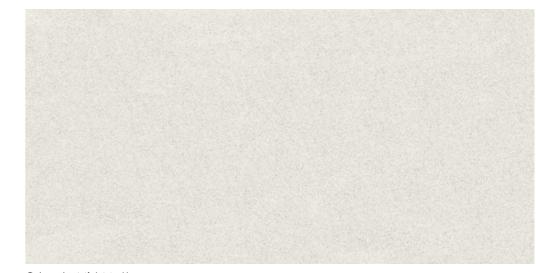

Orlando Mist Matt

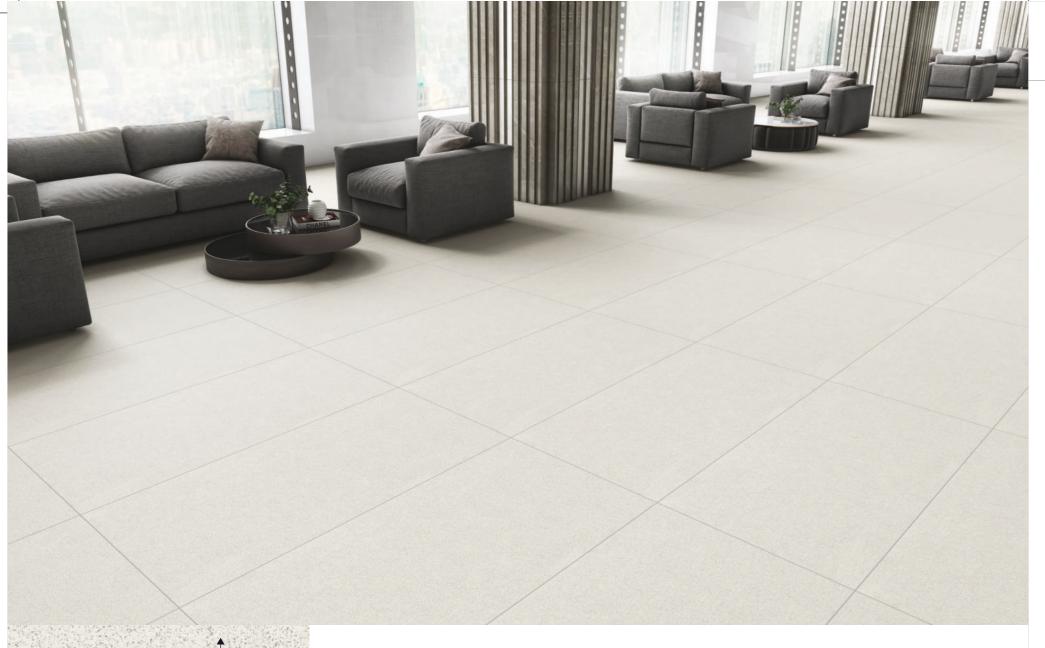

Orlando Mist Ma


Wake up to magnificence, every day.









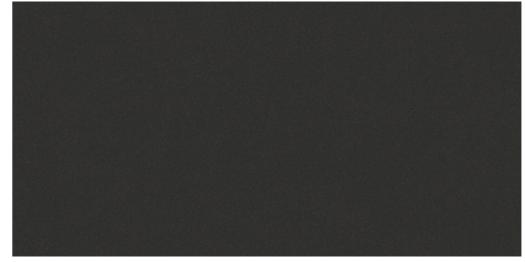

Orlando Nero FP



Orlando Nero Matt












Orlando Beige FP



Orlando Beige Matt





Feel the joy of beauty














Terrazo Brown FP



Terrazo Brown Matt

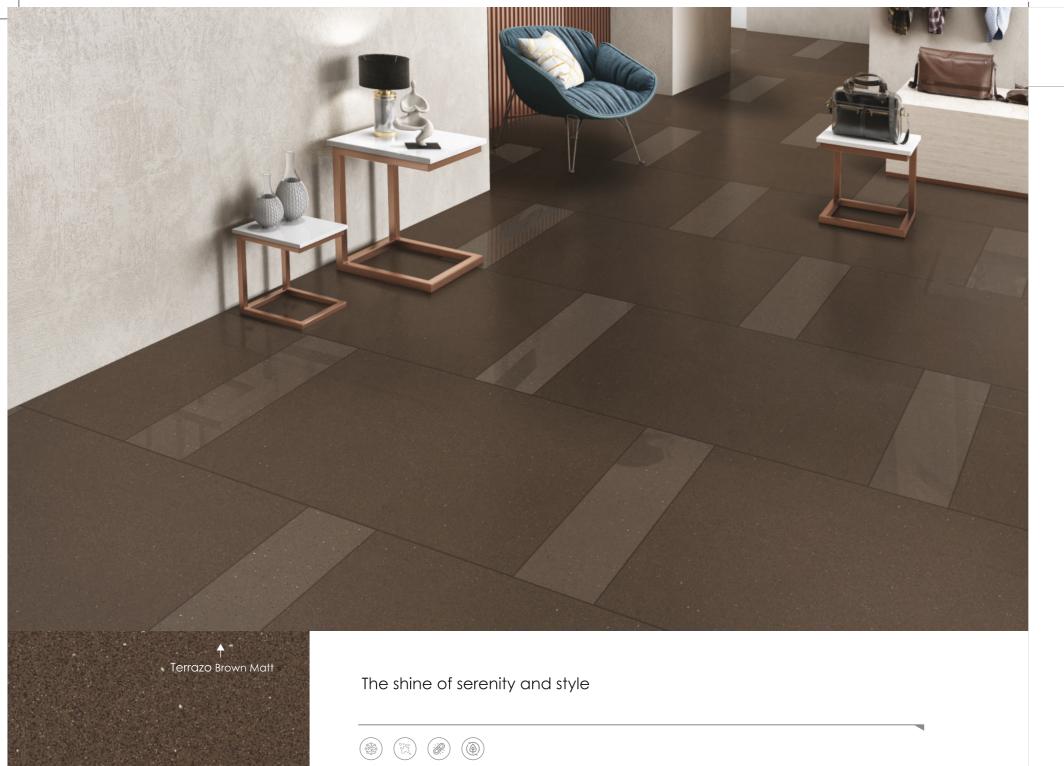







Terrazo Crema FP



Terrazo Crema Matt



Spaces that exude classiness














Terrazo Grey FP



Terrazo Grey Matt

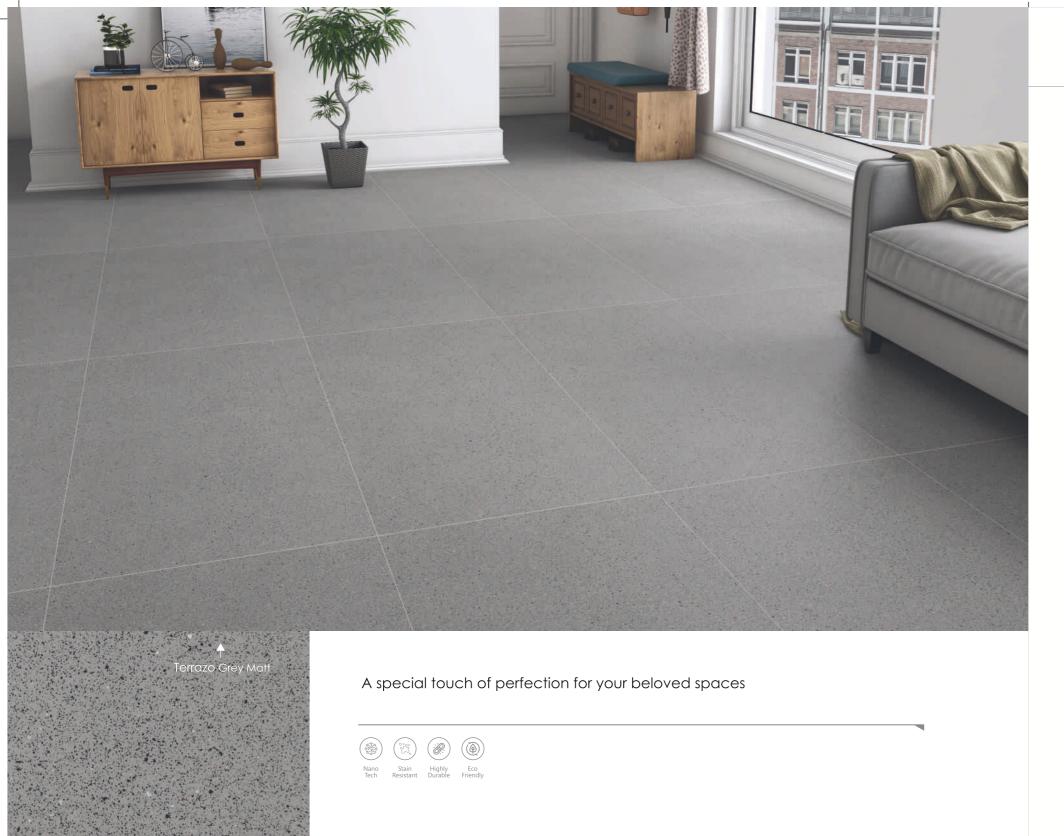






Terrazo Nero FP




Terrazo Nero Matt

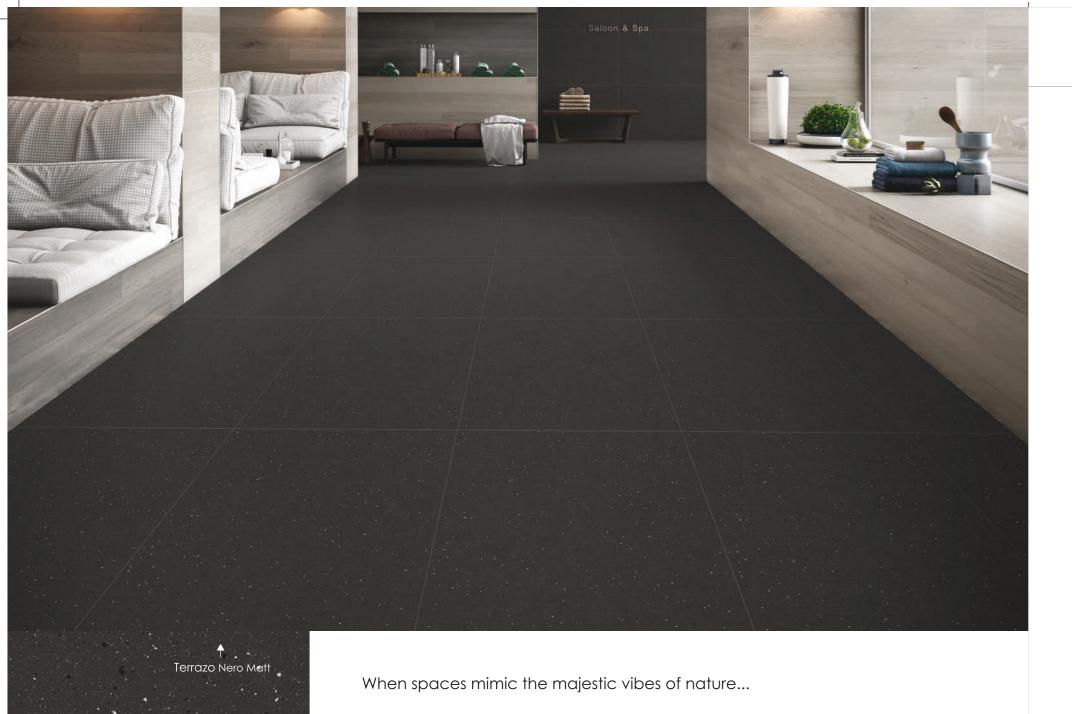






Terrazo Pink FP

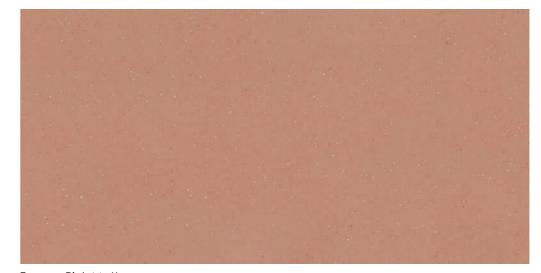

Terrazo Pink Matt

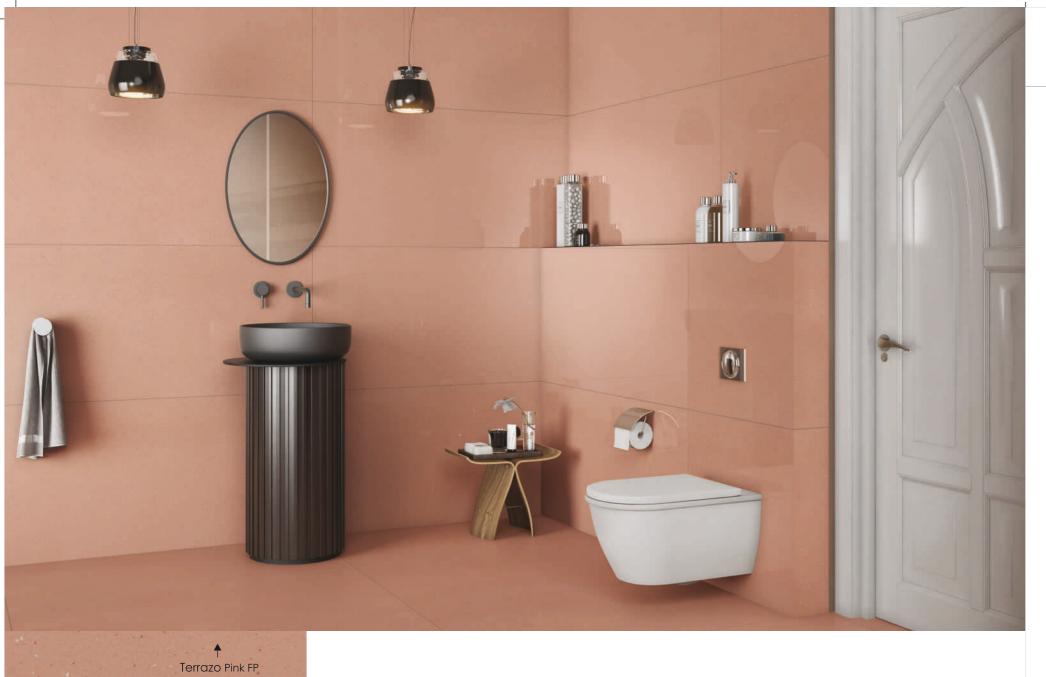



When your choice reflects your persona













Robusto Cotta Green Matt




Robusto Graphite Matt







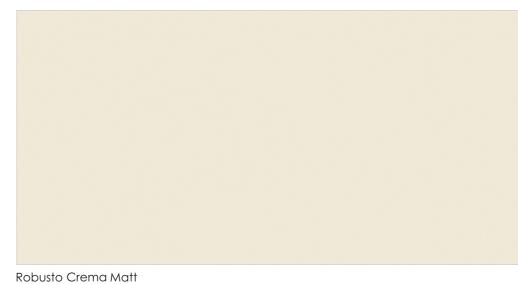




Robusto Crema Matt


The shades and patterns of Eminent invite nature's harmony







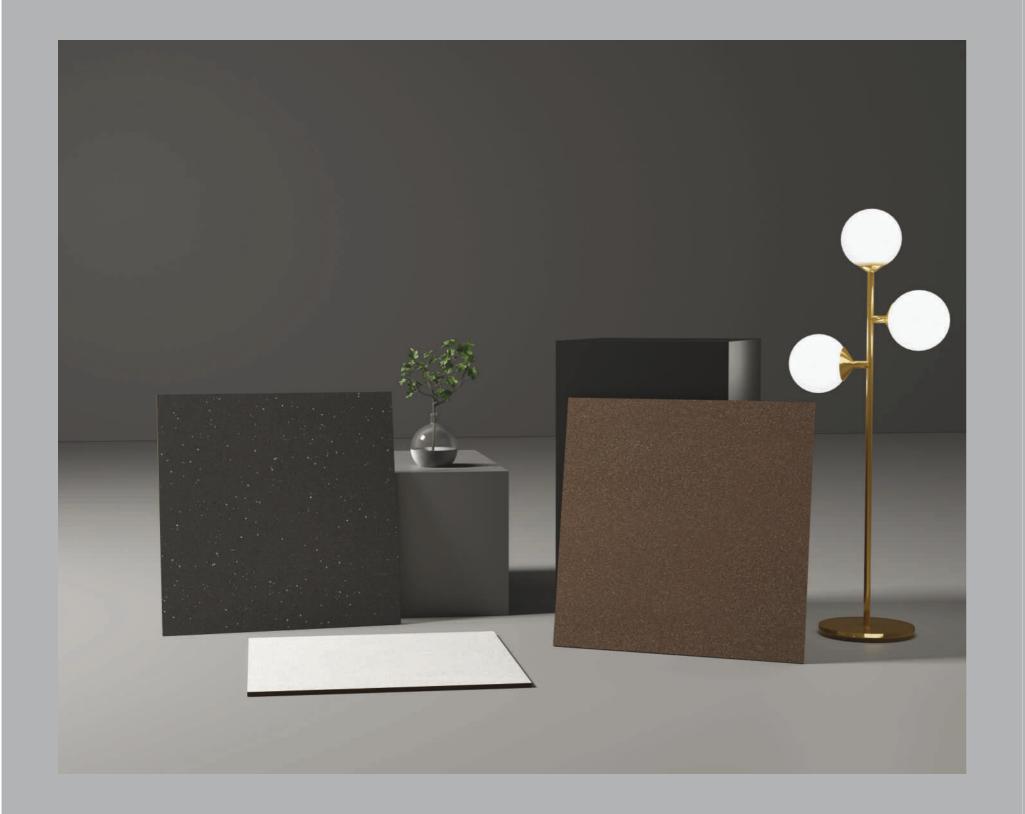

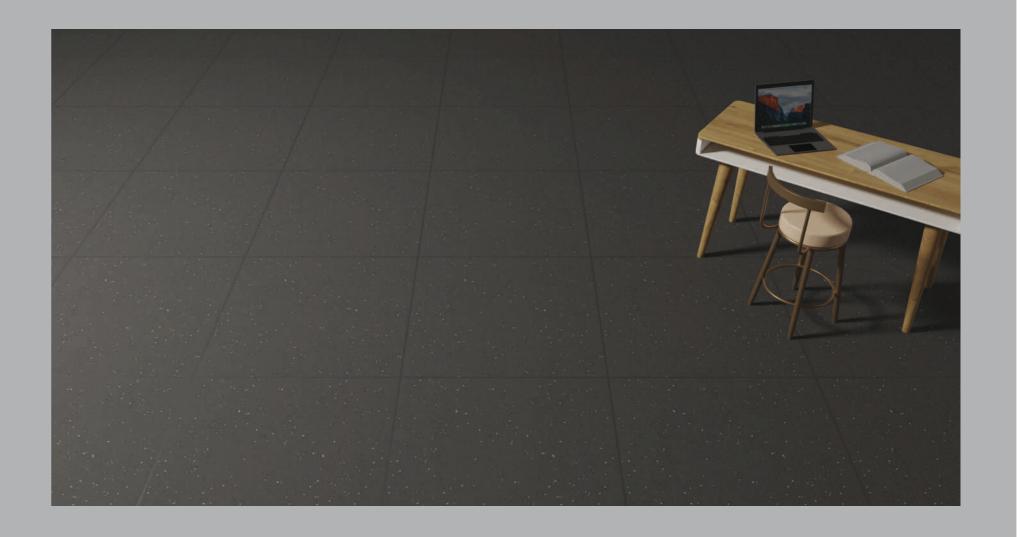

600x600MM
Polished Vitrified Tiles









SURFACE SURROUNDED BY ETERNAL












Orlando Mist FP

Orlando Mist Matt





Orlando Brown FP

Orlando Brown Matt

In a majestic way in beautiful earthy tones





















Orlando Olive FP


Orlando Olive Matt





Orlando Nero FP

Orlando Nero Matt

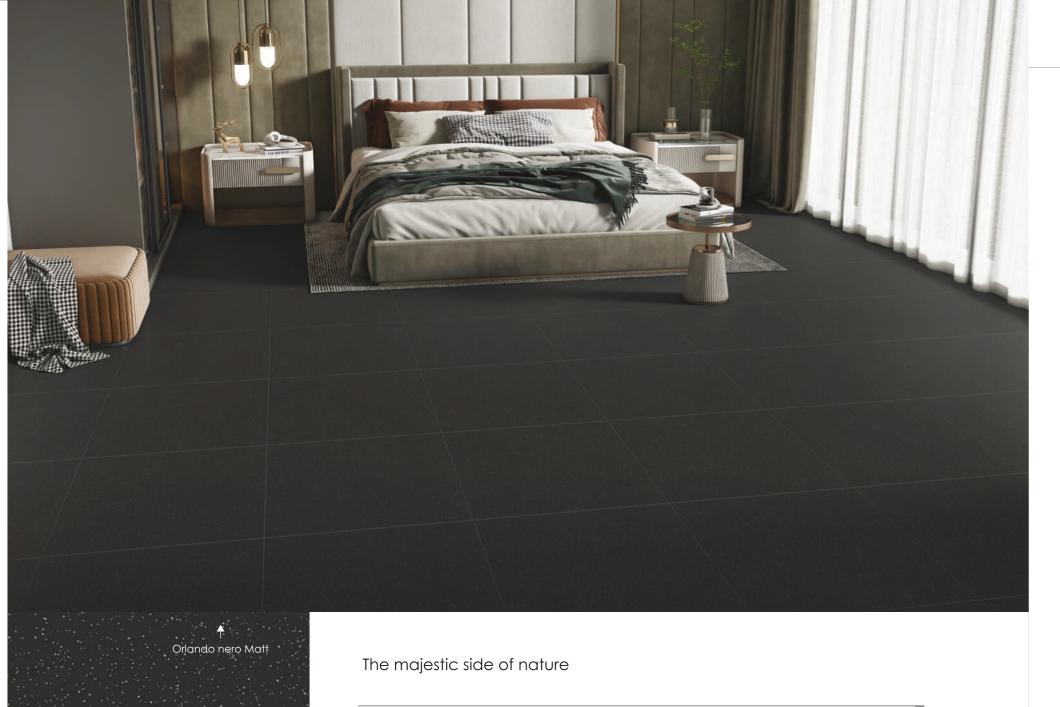

in Highly











Orlando Grey FP

Orlando Grey Matt






Orlando Grey Dark FP


Orlando Grey Dark Matt











Orlando Beige FP

Orlando Beige Matt


∱ Orlando Beige FF

Be at the center of all the attention









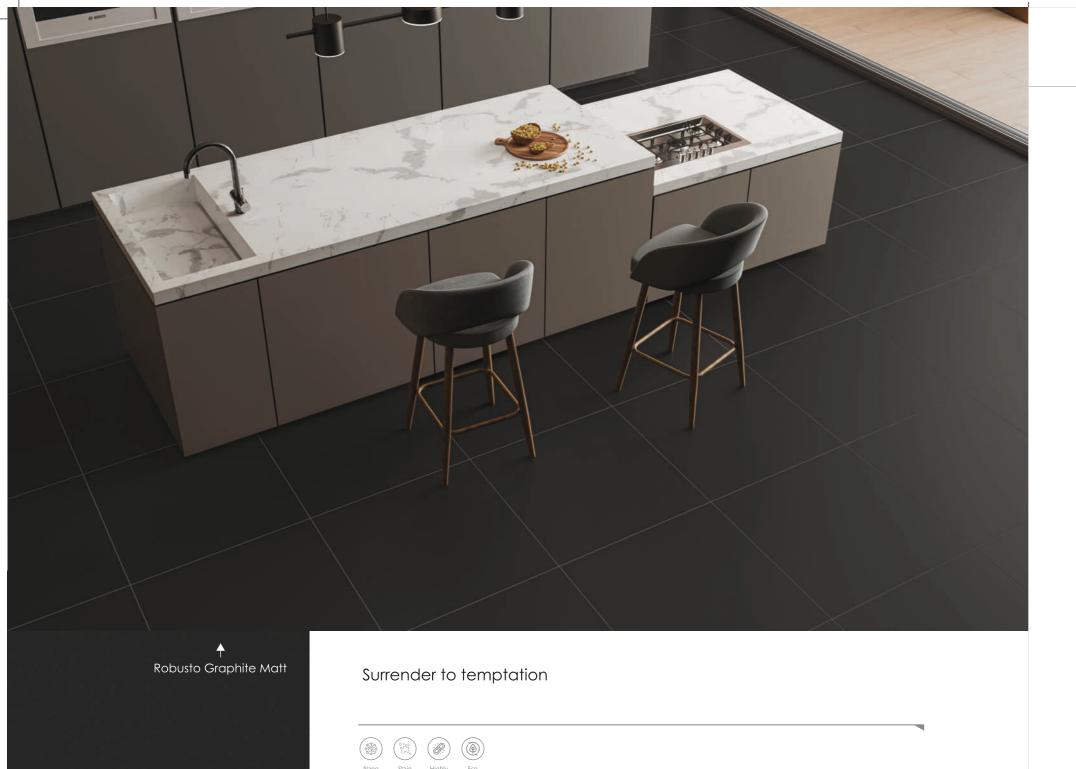

600x600MM | MATT



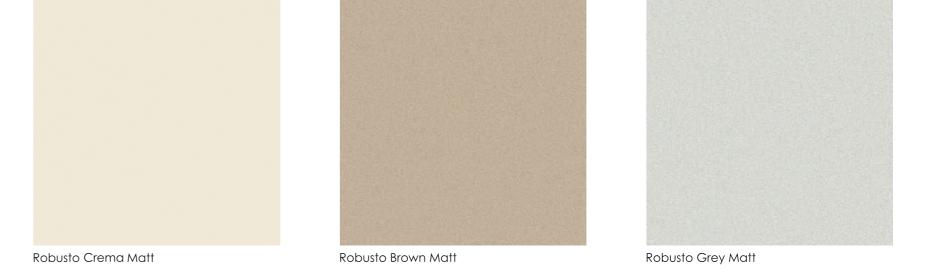

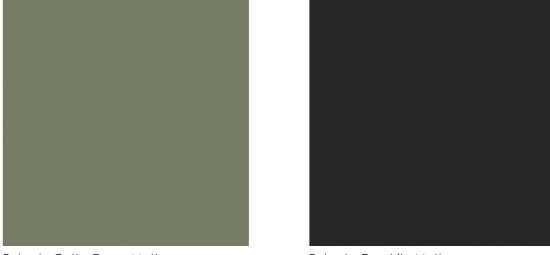

Robusto Cotta Green Matt

Robusto Graphite Matt








Terrazo Crema FP

Terrazo Crema Matt



Terrazo Brown Matt



















HIGH STRENGTH POLYMER MODIFIED TILE ADHESIVE

BENEFITS

- » READY AND EASY TO USE
- > EXCELLENT BONDING WITH ALL SURFACES
- FAST SETTING
- SELF-CURING

<u>USES</u>


- FOR FIXING ALL TYPE OF TILES
- **▶** FOR NEW FLOORING AND RENOVATION
- > CAN BE USED FOR TILE ON TILE


TECHNICAL SPECIFICATION


DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.









V1 Uniform Appearance

Slight Variation

V3 Moderate Variation

V4 Substantial Variation

The classification is as follows:

Minimal Variation № Random Variation № Slight Variation № Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles.

For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customersare advised to see the physical sample before placing the order. "Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.



Packaging Detail for 600x1200mm and 600x600mm Polished Vitrified Tiled

Nominal Size	Finish	Thickness(mm)	No. of tiles per carton	Average weight per carton (Kgs)	Coverage area per carton
600X600mm	Matt	9	4	28.5	1.44sq.mtr./15.50sq.ft.
600X600mm	Polish	8.5	4	26.5	1.44sq.mtr./15.50sq.ft.
600X1200mm	Matt	9	2	28.5	1.44sq.mtr./15.50sq.ft.
600X1200mm	Polish	8.5	2	26.5	1.44sq.mtr./15.50sq.ft.

TECHNICAL SPECIFICATION FOR FULL BODY VITRIFIED TILES

Characteristics	Requirement as per IS 15622 :2017 E ≤ 0.08 Group B I a	Requirement as per ISO 13006 ≤ 0.5% Group B I a	Our Values	Test Method	
Dimension & Surface Quality					
Length & Width	± 0.10%	± 0.5%	± 0.10%		
Thickness	± 5.00%	± 5.00%	± 4.0%	IS 13630 Part 1/ ISO 10545-2	
Straightness of Side	± 0.10% ± 0.10%	± 0.5% ± 0.5%	± 0.10% ± 0.10%		
Rectengularity					
Surface Flatness					
Center Curvature (%) (Max. Dev.)	± 0.50%	± 0.50%	± 0.2 %		
Edge Curvature (%) (Max. Dev.)	± 0.50%	± 0.50%	± 0.2 %		
Corner Warpage (%)(Max. Dev.)	± 0.50%	± 0.50%	± 0.2 %		
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects		
Physical Properties					
Water Absorption	Average ≤ 0.08%, Individual Max. 0.1%	Av ≤ 0.5 %, Individual 0.6% max	Max. < 0.08% Individual Max. 0.1%	IS 13630 Part 2/ ISO 10545-3	
Modulus of Rupture [N/mm2]	Av 35, Individual 32 min	Av 35, Individual 32 min	Av 35, Individual 32	IS 13630 Part 6/ISO 10545-4	
Breaking Strength in N	1300	Min.1300	Min.1300		
Moisture Expansion in mm/m	0.02	Test method available	0.02	IS 13630 Part 3/ISO-10545-10	
Scratch Hardness of Surface (Mohs)	Min 5	N.A	Min 5	IS 13630 Part 13	
Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C	6 X 10 ⁻⁶ K ⁻¹ Max	Test Method Available	Max 6 X 10 ⁻⁶ K ⁻¹ Max	IS 13630 Part 4/ ISO 10545-8	
Thermal Shock Resistance	10 Cycle Min	Required	10 Cycle Passed	IS 13630 Part 5/ISO-10545-9	
Crazing Resistance	4 Cycle @ 7.5 bar Min	N.A	N.A	IS 13630 Part 9/ISO 10545-11	
Impact Resistance as Co-efficient of Restitution (COR)	0.55 Min	Test Method Available	0.55 Min	IS 13630 Part 14/ISO 10545-5	
Deep Abrastion Resistance [in mm³]	140,Max	Max.175	Max.100	IS 13630 PART 12/ISO 10454-0	
Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12	
Chemical Resistance (Unglazed Tiles)					
Stain Resistance	Min Class 2	Manufacturer to State The Class	Min Class 2	IS 13630 Part 7/ISO 10545-14	
Resistance to Household chemicals	Min Class AA	Min Class UB	Class UA	IS 13630 Part 7/ISO 10545-13	
Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if Agreed	Test Method Available	Class ULA (Low Conc) Class UHA (High Conc)		

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. Technical Specification" for Somany will & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.